



Certified by ISO9001 International Quality Control System

JXJ-300VI Series LED Arrow Lamps

Features

- Compliance with latest ITE specifications
- Retrofit design & UV stabilized lens
- MIL-STD-883 mechanical vibration
- MIL-STD-810F moisture resistant
- Compliance with FCC Title 47
- Full compatibility with NEMA controllers/conflict monitors
- Wide viewing angle for span wire/mast arm mount

Dimensions

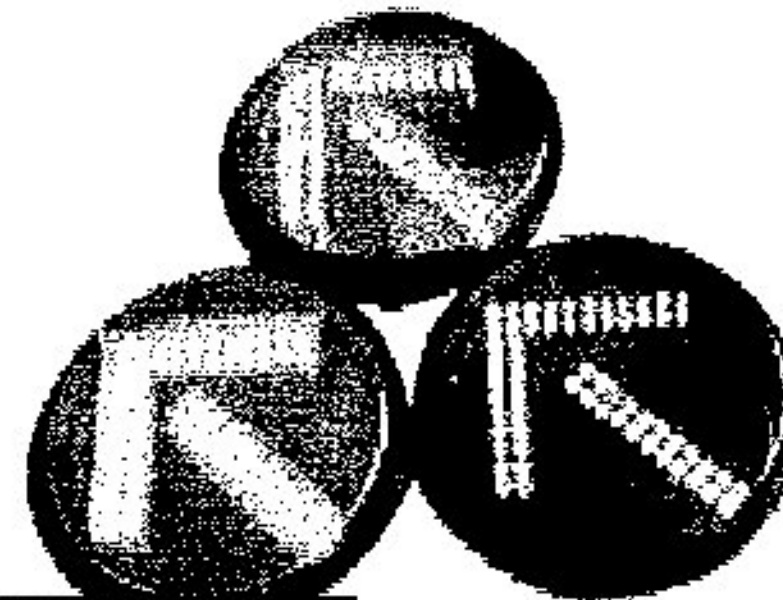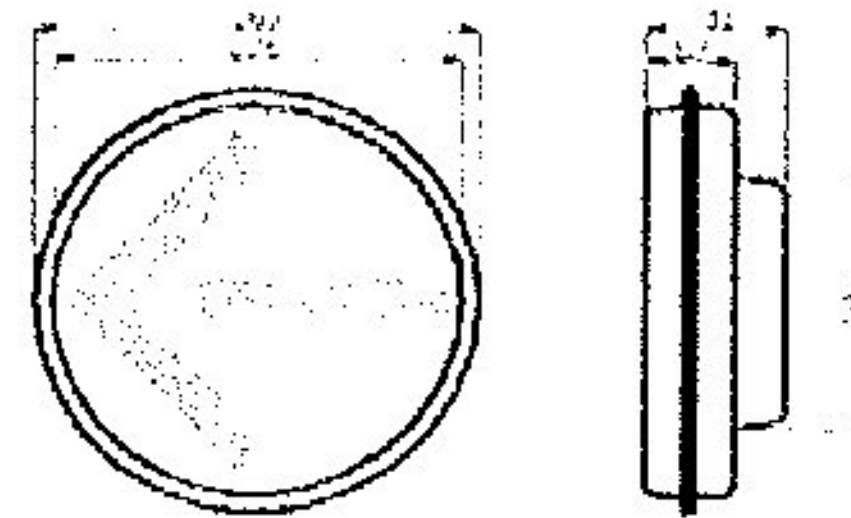

Quan. X 5

Quan. X 12

Quan. X 12

Model Number	Size (mm)	Color (nm)	Voltage (Typical)	Voltage Range	Power(w) Typical	Operation Temperature	Power Factor	T.H.D	ITE Specs.
	300	Red (626)	120V~60hz	80v~135v	7.5	-40°F ~ +165°F	> 0.9	< 20%	Yes
JXJ-300VIYA	300	Yellow (592)	120V~60hz	80v~135v	7.5	-40°F ~ +165°F	> 0.9	< 20%	Yes
JXJ-300VIGA	300	Green (505)	120V~60hz	80v~135v	7.5	-40°F ~ +165°F	> 0.9	< 20%	Yes

All characteristics, including visual characters, chromaticity, moisture and vibration resistance, electronic noise, transient protection, etc., are in compliance with the standards specified in ITE LED Arrow Signal Modules.

For additional technical information or sales support regarding these and other LED products, please contact: