

Certified by ISO9001 International Quality Control System

JXM-300/400VIE Series Countdown Pedestrian Lamps

Features

- Low power consumption & long operating lifetime LEDs
- Retrofit design & UV stabilized lens
- MIL-STD-883 mechanical vibration
- MIL-STD-810F moisture resistant
- Full compatibility with NEMA controllers/conflict monitors

Dimensions

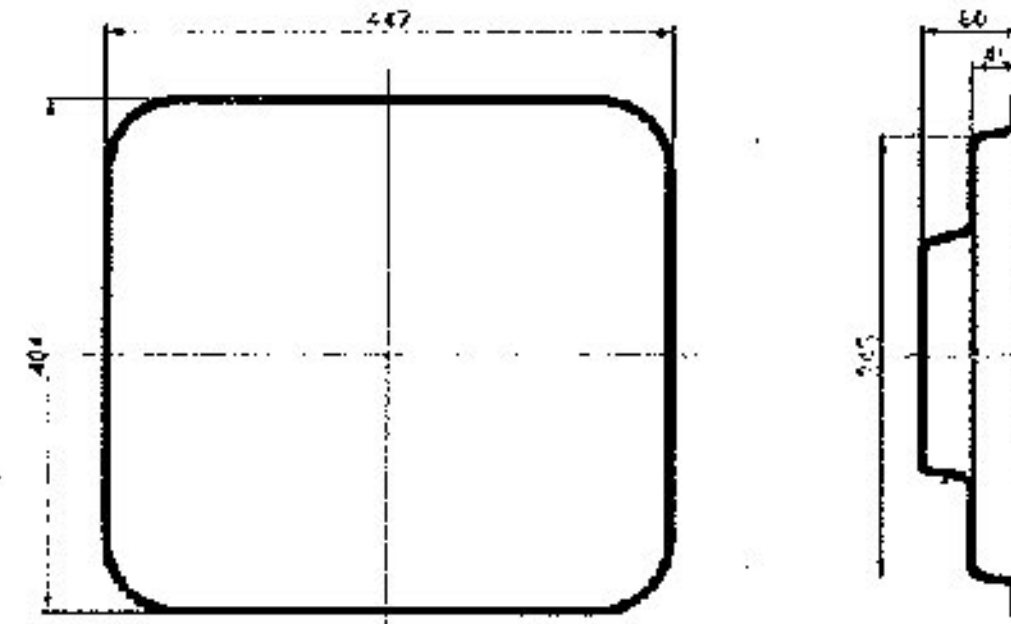


Fig. A

Quan. X 58

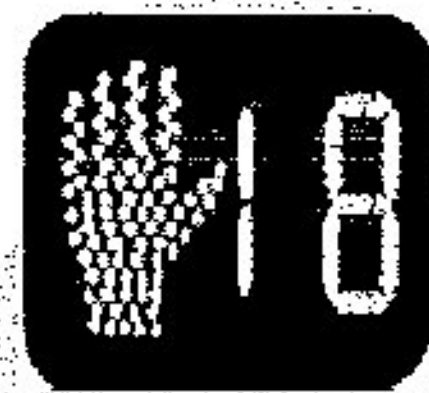


Fig. B



Fig. C

Model Number	Fig	Size (mm)		Config.	Symbol			Voltage (Typical)	Voltage Range		Power (W)		
		Inches	mm		Hand	Man	Countdown		60 Hz(AC)	Hand	Man	Digit	
JXM-300VIE	A	16x18	407x450	Countdown/ full H/M	Full	Full	2 Digit	120V~60hz	80v~135v	8	8	4	
JXM-400VIE	B	16x18	407x450	Countdown/ full H/M	Full	Full	2 Digit	120V~60hz	80v~135v	8	8	4	
JXM-300VIE	C	16x18	407x450	Countdown/ full H/M	Full	Full	2 Digit	120V~60hz	80v~135v	8	8	4	

Fig. A: optional operations dipswitch. Fig. C: full incandescent look.

All characteristics, including visual characters, chromaticity, moisture and vibration resistance, electronic noise, transient protection, etc., are in compliance with the standards specified in ITE LED Pedestrian Signal Modules.

For additional technical information or sales support regarding these and other LED products, please contact: