




- APPROACH AREA DETAIL -
STA 123+55 (BEGIN PROJECT)

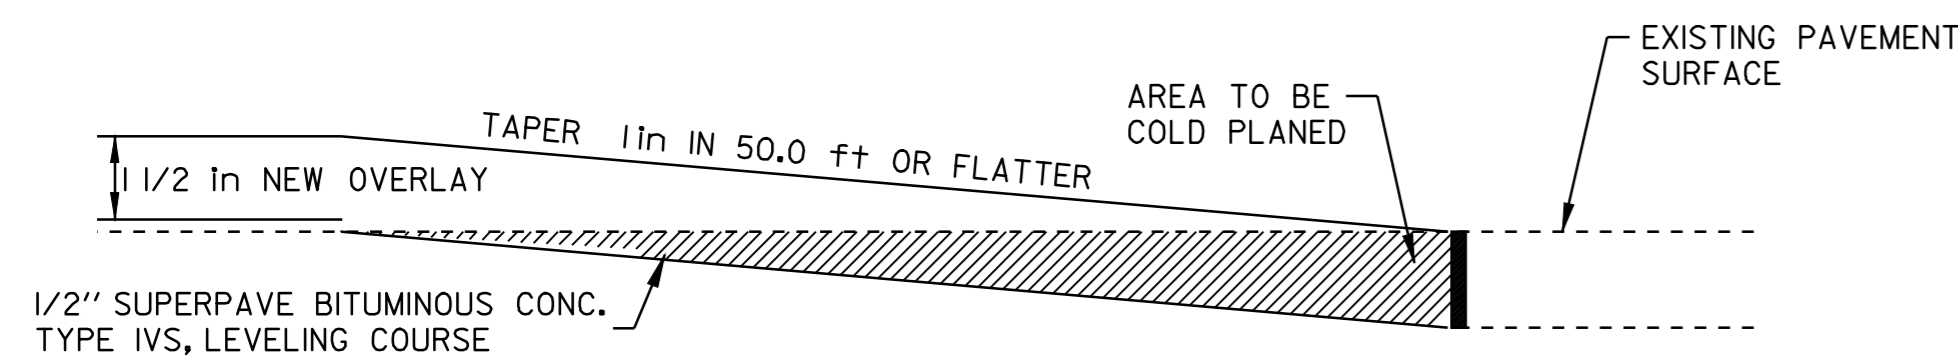

- TRANSITION AREA DETAIL -
STA 226+25 (END PROJECT)

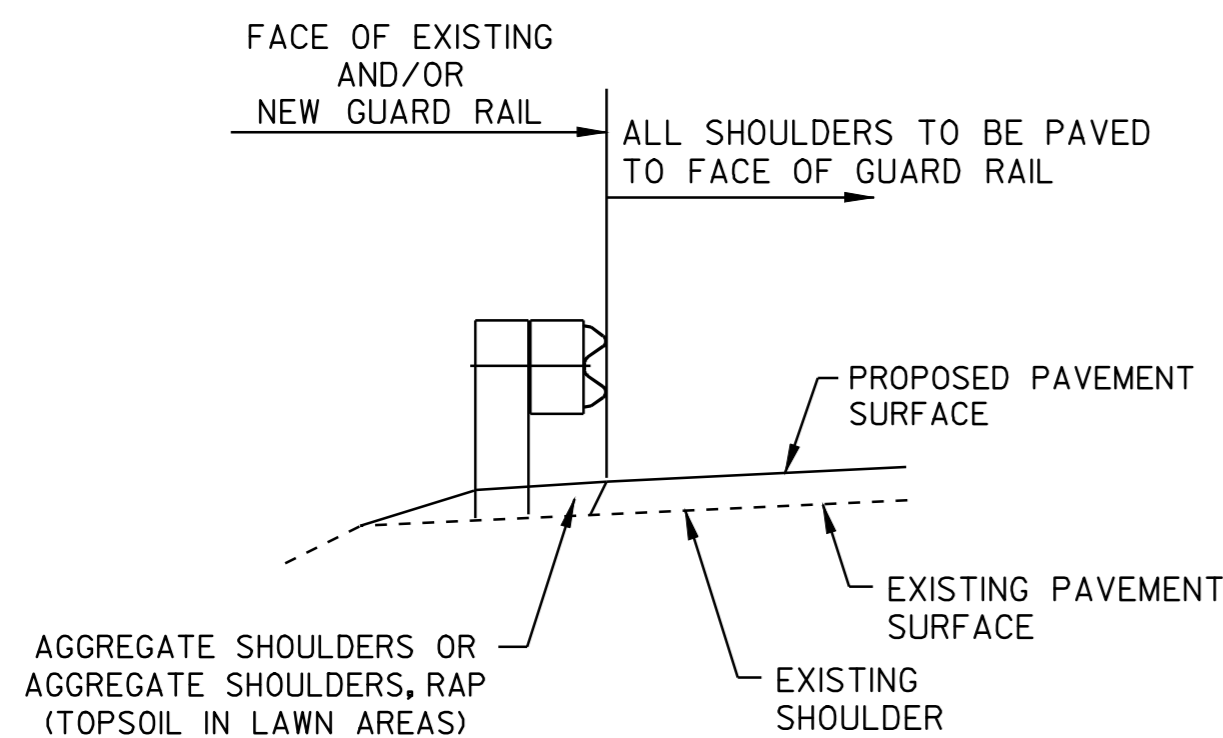

- TYPICAL SECTION AT GUARD RAIL -

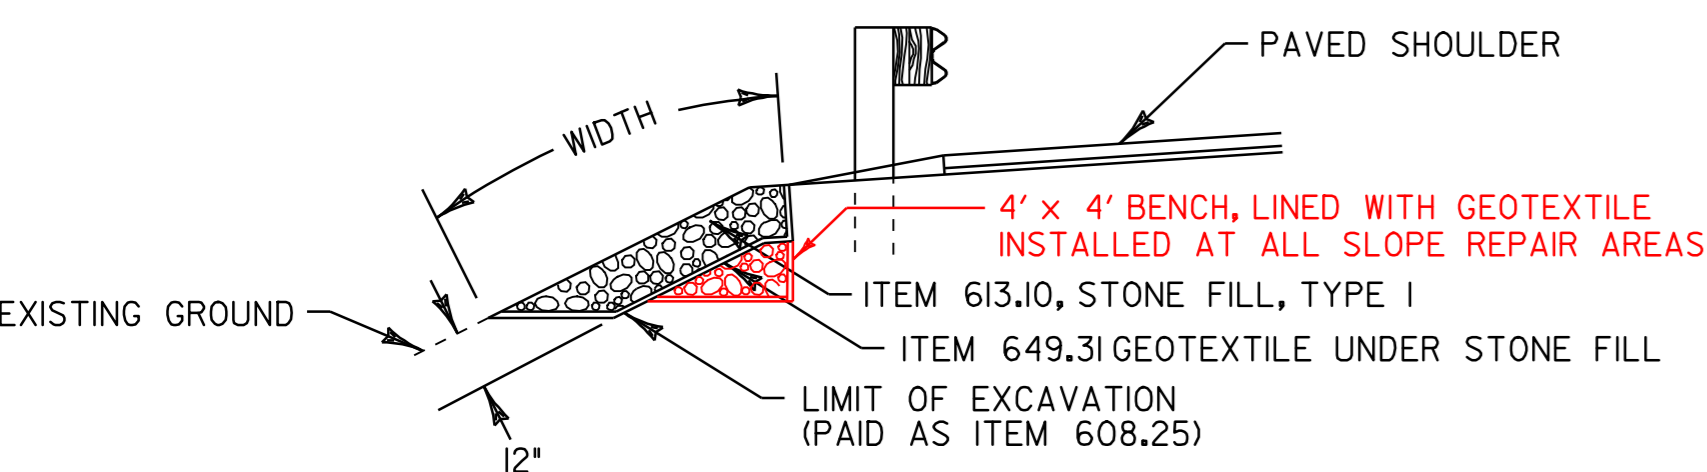

SLOPE EROSION REPAIR DETAIL
VARIOUS LOCATIONS

RURAL AREA - SEED MIXTURE

% WT.	lbs./ACRE	NAME	PUR%	GERM%
37.5	22.5	CREeping RED FESCUE	98	85
37.5	22.5	TALL FESCUE	95	90
5.0	3	RED TOP	95	90
15.0	9	BIRDSFOOT TREFOIL	98	85
5.0	3	ANNUAL RYEGRASS	95	85
100.0	60			

SEED MIXTURE:
SHALL NOT HAVE A WEED CONTENT EXCEEDING 0.40% BY WEIGHT AND SHALL BE FREE OF ALL NOXIOUS SEED.


SEED:
TO BE APPLIED PER SEEDING FORMULAS OR AS DIRECTED BY THE ENGINEER.

FERTILIZER:
FORMULA 10-20-10, TO BE USED WITH SEED, APPLIED AT THE RATE OF 500 lbs/ACRE. (HYDRO SEEDERS MAY USE 19-19-19 FORMULA)


AGRICULTURAL LIMESTONE:
TO BE APPLIED AT THE RATE OF 2.0 TONS/ACRE, OR AS DIRECTED BY THE ENGINEER.

TEMPORARY EROSION MATTING:
TO BE USED AS INDICATED ON THE PLANS, OR AS DIRECTED BY THE ENGINEER.

TOPSOIL:
TO BE USED AS INDICATED ON THE PLANS, OR AS DIRECTED BY THE ENGINEER.

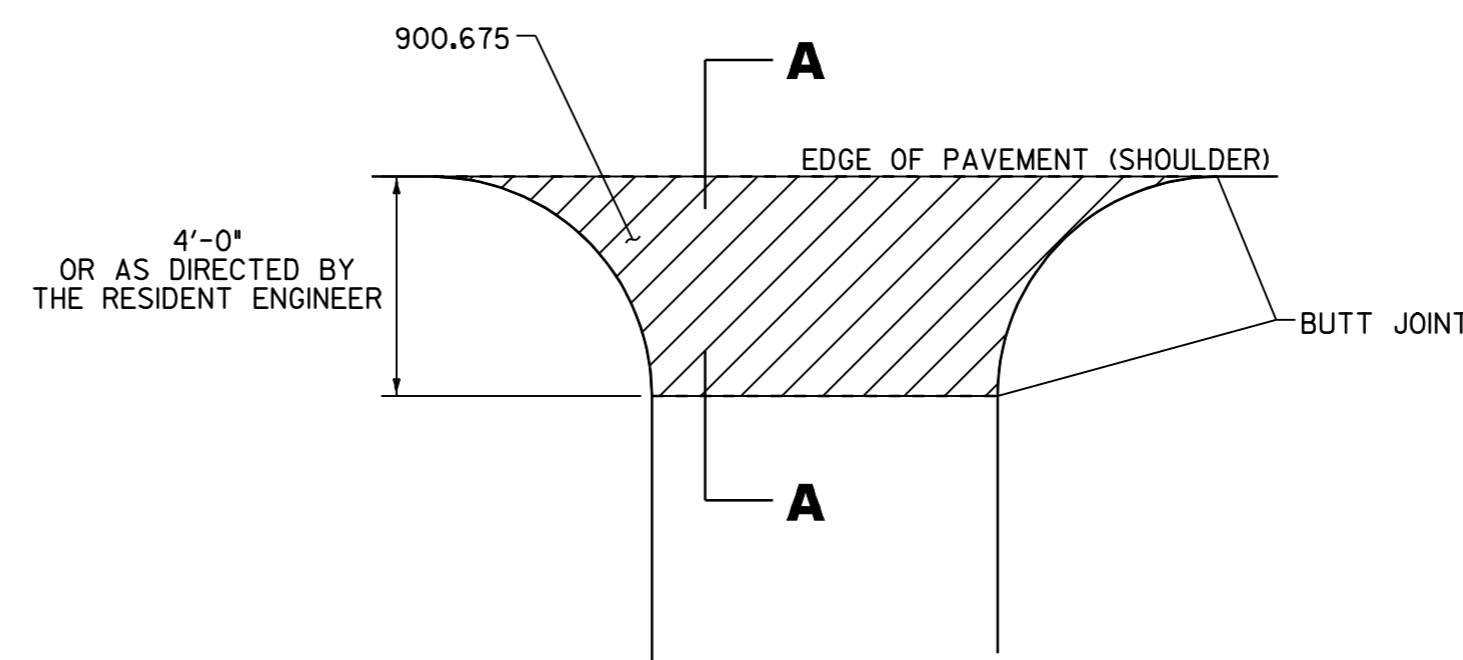

PLAN

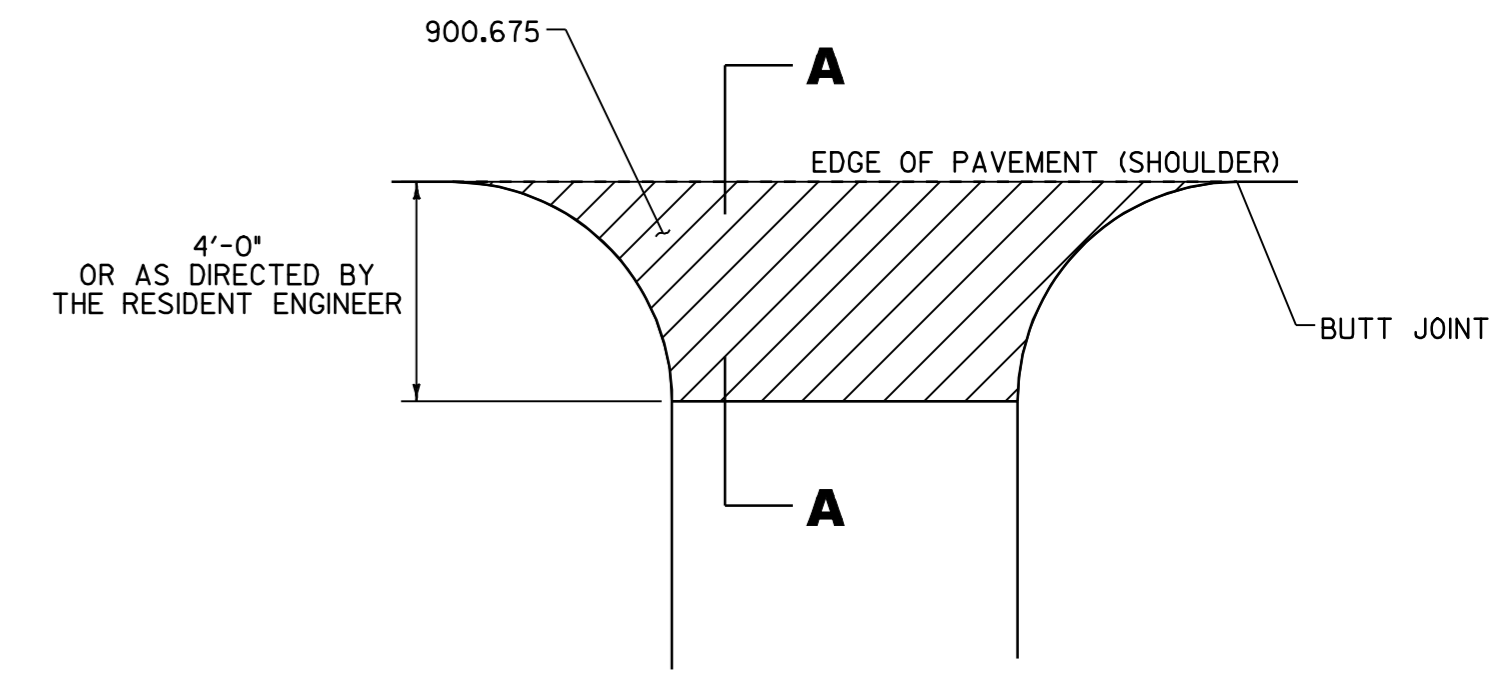


SECTION

HANDWORK DETAILS FOR PAVED DRIVES

STATION	POSITION	QUANTITY (SY)
124+00	LT	23
131+20	LT	32
137+75	LT	27
139+92	LT	18
145+46	LT	13
151+54	RT	20
170+39	LT	32
170+81	RT	23
174+76	LT	104
174+76	RT	23
182+16	RT	12
185+70	LT	16
186+75	LT	18
190+82	RT	5
206+87	RT	16
208+08	RT	5
210+94	RT	6
213+58	RT	6
217+00	LT	22
220+81	LT	43
222+92	RT	9
241+13	LT	35
225+01	RT	56

LEGEND

 ITEM 900.675 SPECIAL PROVISION (HAND PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES)

PROJECT TYPICAL SHEET #2

DESIGNED BY JLR DATE 12-08
 DRAWN BY JLR DATE 12-08
 DESIGN FILE NO. p07cl64.dgn
 PRF FILE p07cl64_04.1 DATE 28-MAY-2010
 PROJ. NAME **WEATHERSFIELD**
 PROJ. NO. **STP 2711(1)**
 SHEET **4** OF **21** SHEETS