


LOCATION				FEET OF DITCHING			MISC. ITEMS			REMARKS	LOCATION				FEET OF DITCHING			MISC. ITEMS			REMARKS						
SITE	STATION	STATION	POS.	PERCENT GRADE			613.10	649.31	653.20		STONE FILL TYP. 1	GEOT. UNDER STONE FILL	TEMP. EROS. MATT.	SITE	STATION	STATION	POS.	PERCENT GRADE				613.10	649.31	653.20	STONE FILL TYP. 1	GEOT. UNDER STONE FILL	TEMP. EROS. MATT.
				0-1	1-2.5	2.5-10												0-1	1-2.5	2.5-10							
							CY	SY	SY													CY	SY	SY			
VT ROUTE 105																											
TROY																											
1	I51+54	I62+10	LT			1056	I56	704																			
PROJECT SUBTOTALS (EST.)						1056	I56	704																			
ROUNDING						-	4	6																			
PROJECT TOTALS						1056	I60	710																			

LOCATION				FEET OF DITCHING			MISC. ITEMS			REMARKS			
SITE	STATION	STATION	POS.	PERCENT GRADE			613.10	649.31	653.20		STONE FILL TYP. 1	GEOT. UNDER STONE FILL	TEMP. EROS. MATT.
				0-1	1-2.5	2.5-10							
							CY	SY	SY				
VT ROUTE 105													
TROY													
1	I51+54	I62+10	LT			1056	I56	704					

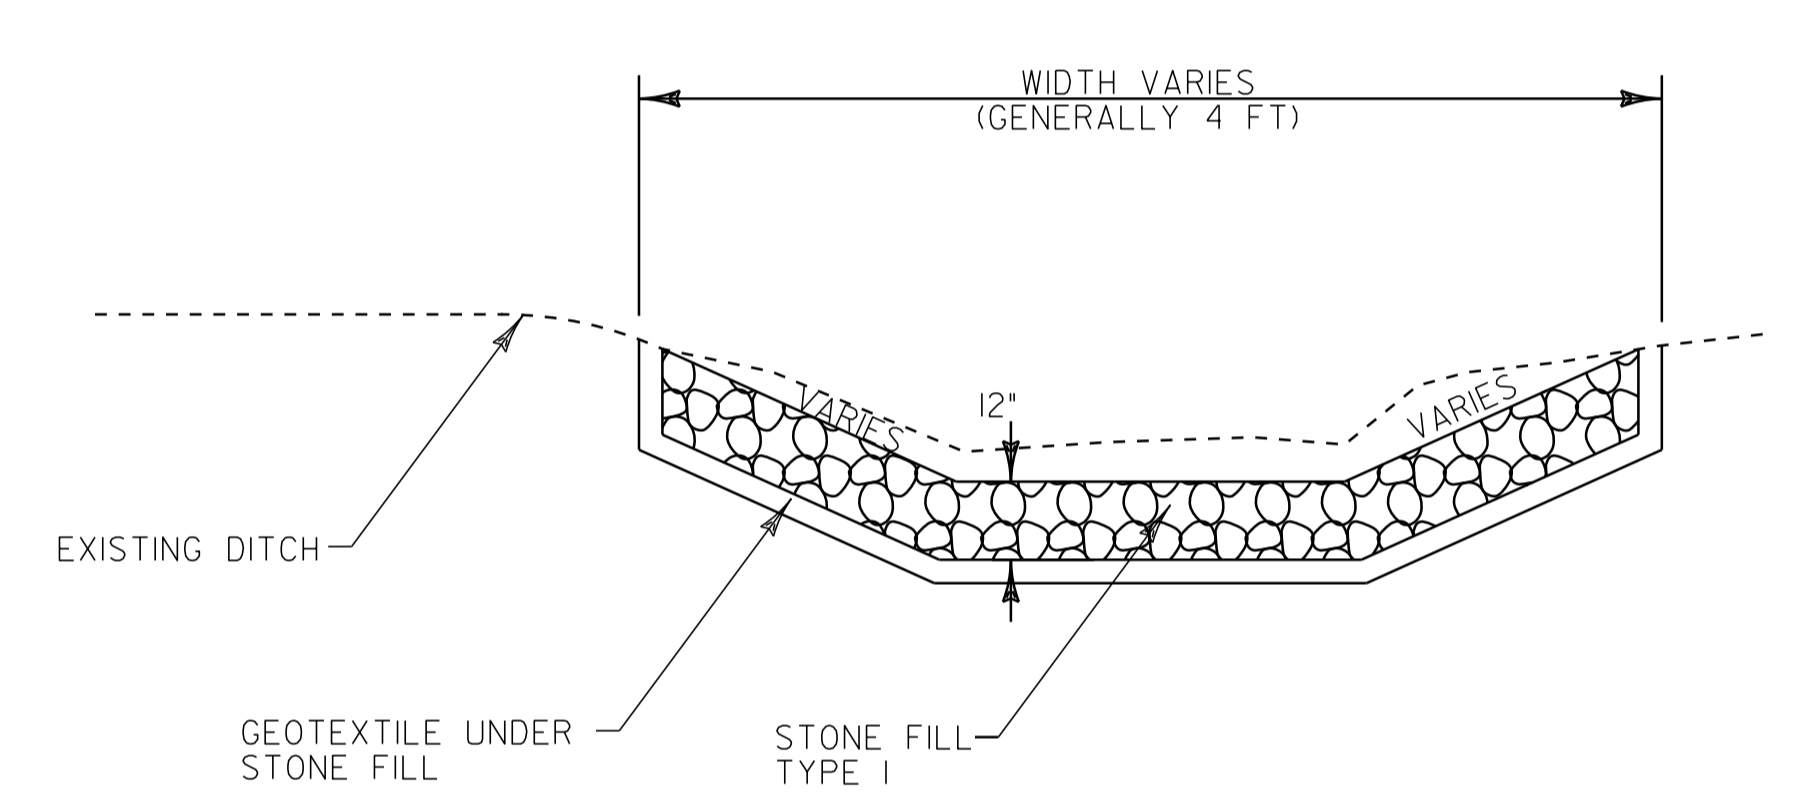

DITCH DETAIL

- NOTES:
- PIPE INLET AND OUTLET AREAS, AND DITCH CLEANING THROUGH PROJECT, SHALL BE PERFORMED AT LOCATIONS INDICATED ON THIS SHEET AND AS DIRECTED BY THE VAOT RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).
 - ESTIMATED QUANTITIES OF TEMPORARY EROSION MATTING, SEED, AND STONE FILL TYPE I HAVE BEEN INCLUDED. DITCHES WITH A GRADE LESS THAN 1 PERCENT SHALL BE SEEDED. TEMPORARY EROSION MATTING SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 1 AND 2.5 PERCENT. STONE FILL, TYPE I SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 2.5 AND 10 PERCENT OR AS DIRECTED BY THE VAOT RESIDENT ENGINEER.



DITCH CLEANING DETAIL SHEET	PROJECT NAME: NORTH TROY	PLOT DATE: 25-OCT-2011 4:03
	PROJECT NUMBER: STP 2620(1)	DRAWN BY: STANTEC
	FILE NAME: p06b208.dgn	CHECKED BY: JLL
	PROJECT LEADER: JLL DESIGNED BY: MCF IPARM FILE: p06b208dcs.i	SHEET 84 OF 116