

MATERIAL TOLERANCES

MATERIAL ITEM	THICKNESS TOLERANCE
PAVEMENT (TOTAL DEPTH)	± 1/4"
BASE COURSE	± 1/2"
SUBBASE	± 1"
SAND BORROW	± 1"

TYPICAL SECTIONS








- 1 3/4" SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (TYPE III)
- 3 3/4" SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (TYPE IIS)
- 3 3/4" SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (TYPE IIS)
- 24" SUBBASE OF DENSE GRADED CRUSHED STONE
- 18" SAND BORROW

SEEDING FORMULA

SEE EPSC DETAILS SHEET 3 FOR THE SEEDING FORMULA.

GENERAL NOTES

- ALL WORK TO BE PERFORMED ON THIS PROJECT SHALL BE CONTAINED WITHIN THE LIMITS OF THE EXISTING STATE OF VERMONT AND TOWN OF HYDE PARK RIGHT-OF-WAYS.
- TACK COAT: EMULSIFIED ASPHALT IS TO BE APPLIED AT THE RATE OF 0.025 GAL/SY BETWEEN SUCCESSIVE COURSES OF PAVEMENT AS DIRECTED BY THE ENGINEER.
- MARKER POSTS: TO BE PLACED AS INDICATED OR AS DIRECTED BY THE ENGINEER.
- SLOPE ROUNDING: ALL CUT SLOPES TO BE ROUNDED IN ACCORDANCE WITH STANDARD B-5.
- ALL MATERIALS AND CONSTRUCTION PRACTICES SHALL CONFORM TO THE STATE OF VERMONT AGENCY OF TRANSPORTATION'S 2006 STANDARD SPECIFICATIONS FOR CONSTRUCTION AND IT'S LATEST REVISIONS.
- SEE TYPICAL SECTIONS SHEET 2 FOR REINFORCED SOIL SLOPE DETAIL.
- ANTI-ICING POLYMER SURFACE OVERLAY SHALL BE APPLIED IN TRAVEL LANES ONLY FROM STA. 92+52.27 - STA. 95+71.00 AND FROM STA. 97+04.00 - STA. 102+46.30.
- ANTI-ICING POLYMER SURFACE OVERLAY SHALL BE CARGILL SAFELANE HDX OVERLAY SYSTEM, PAID FOR UNDER ITEM NO. 900.670 - SPECIAL PROVISION (ANTI-ICING POLYMER SURFACE OVERLAY, CARGILL SAFELANE HDX)

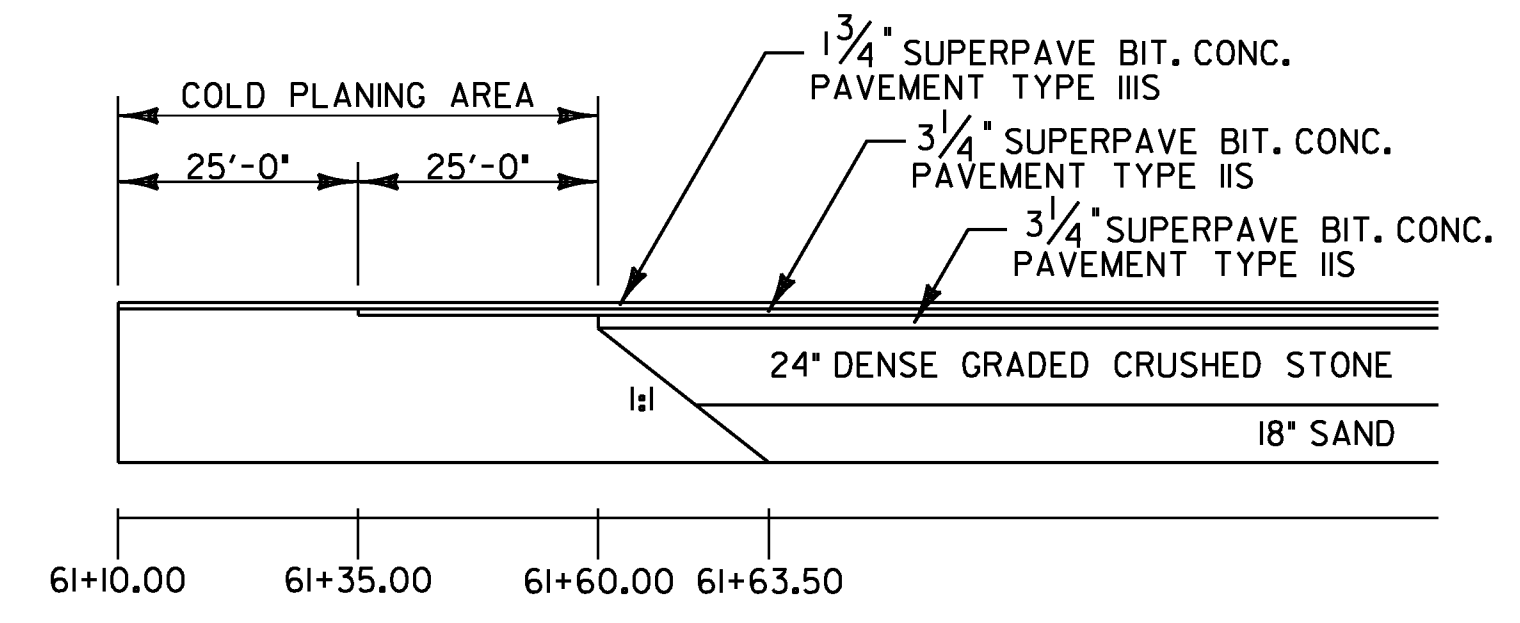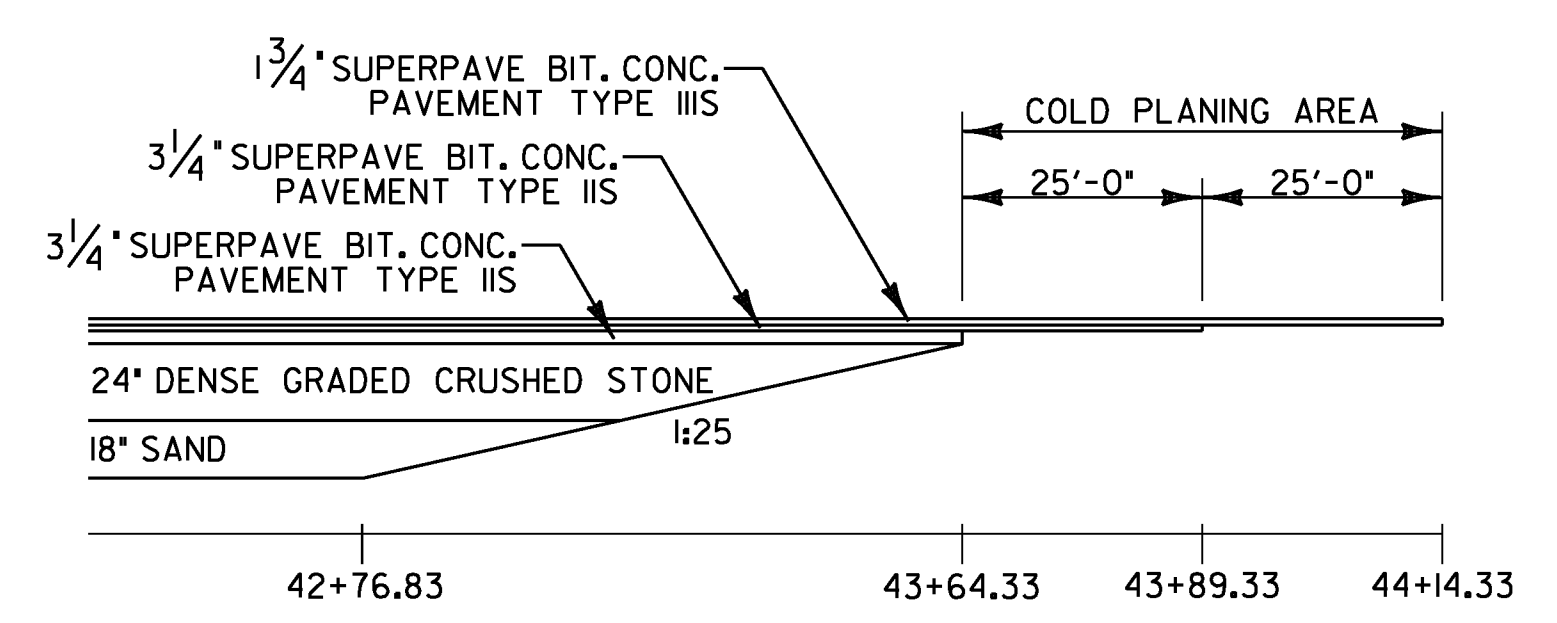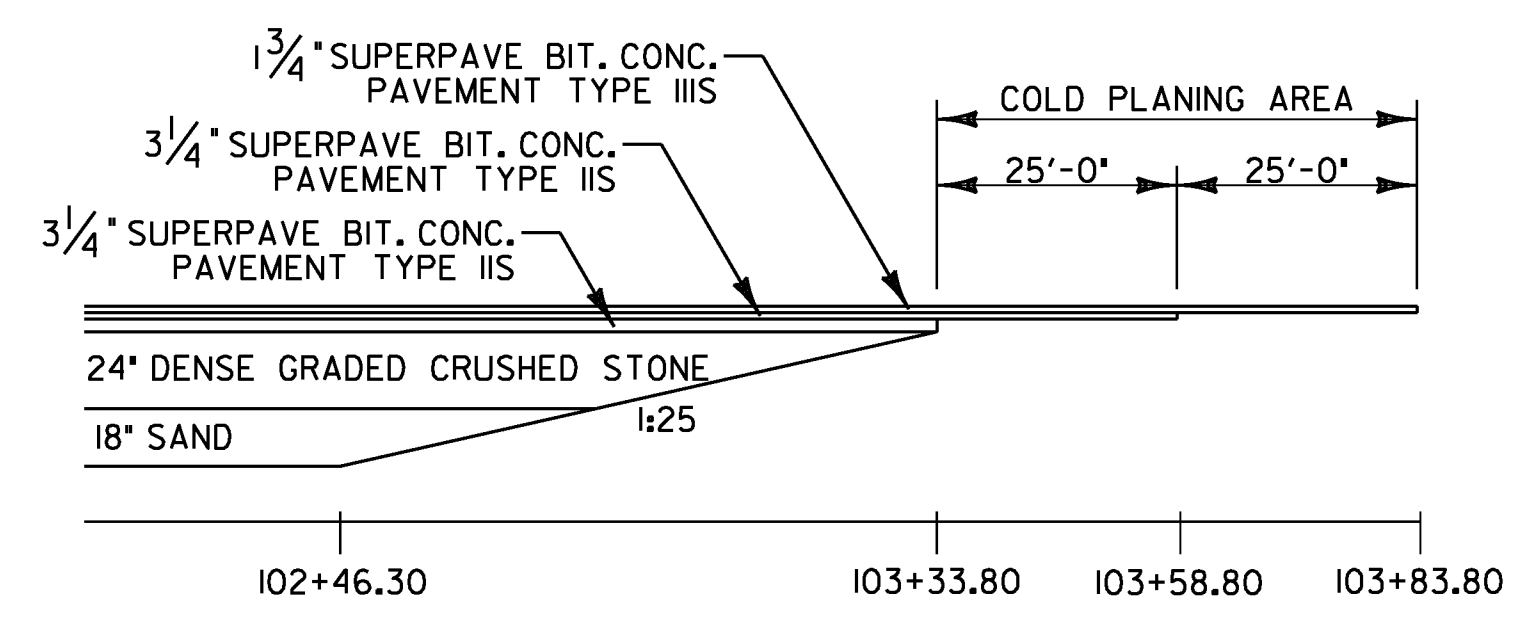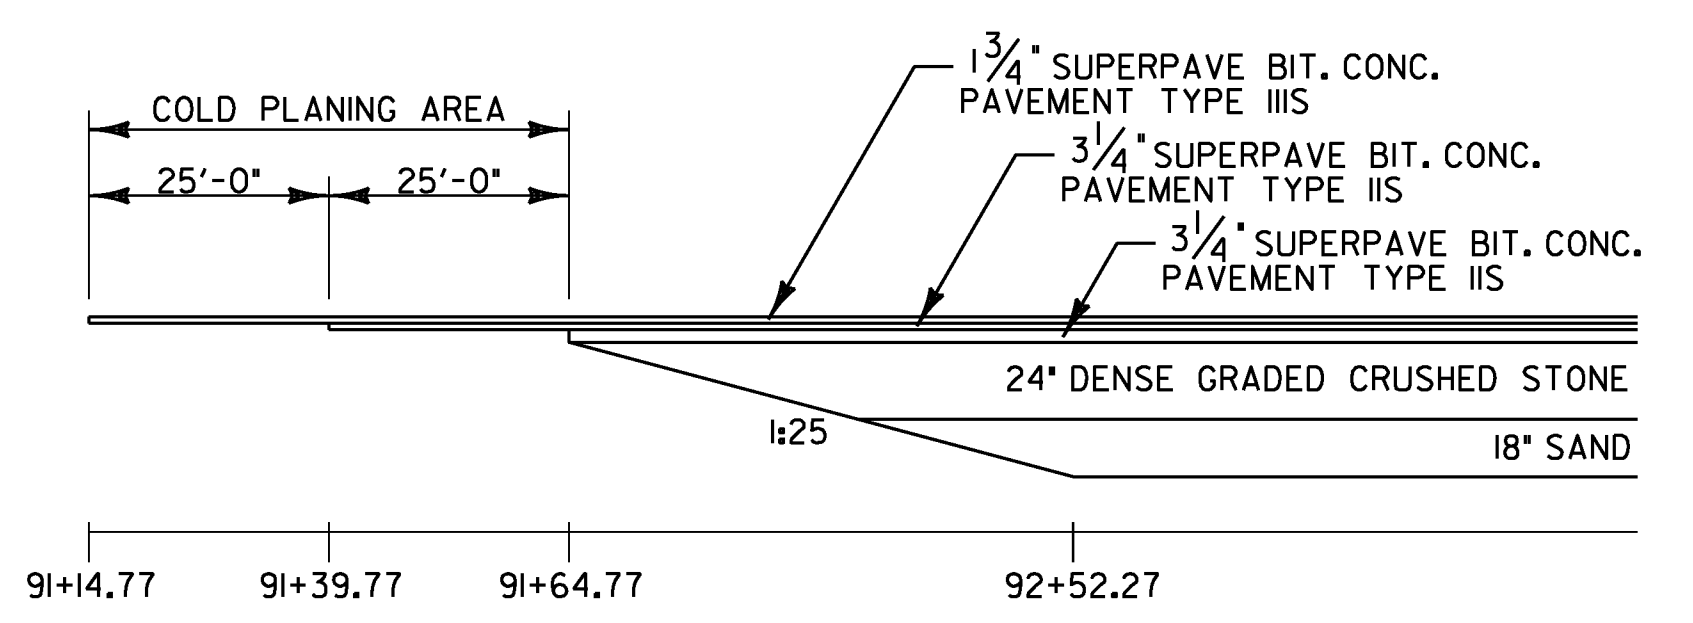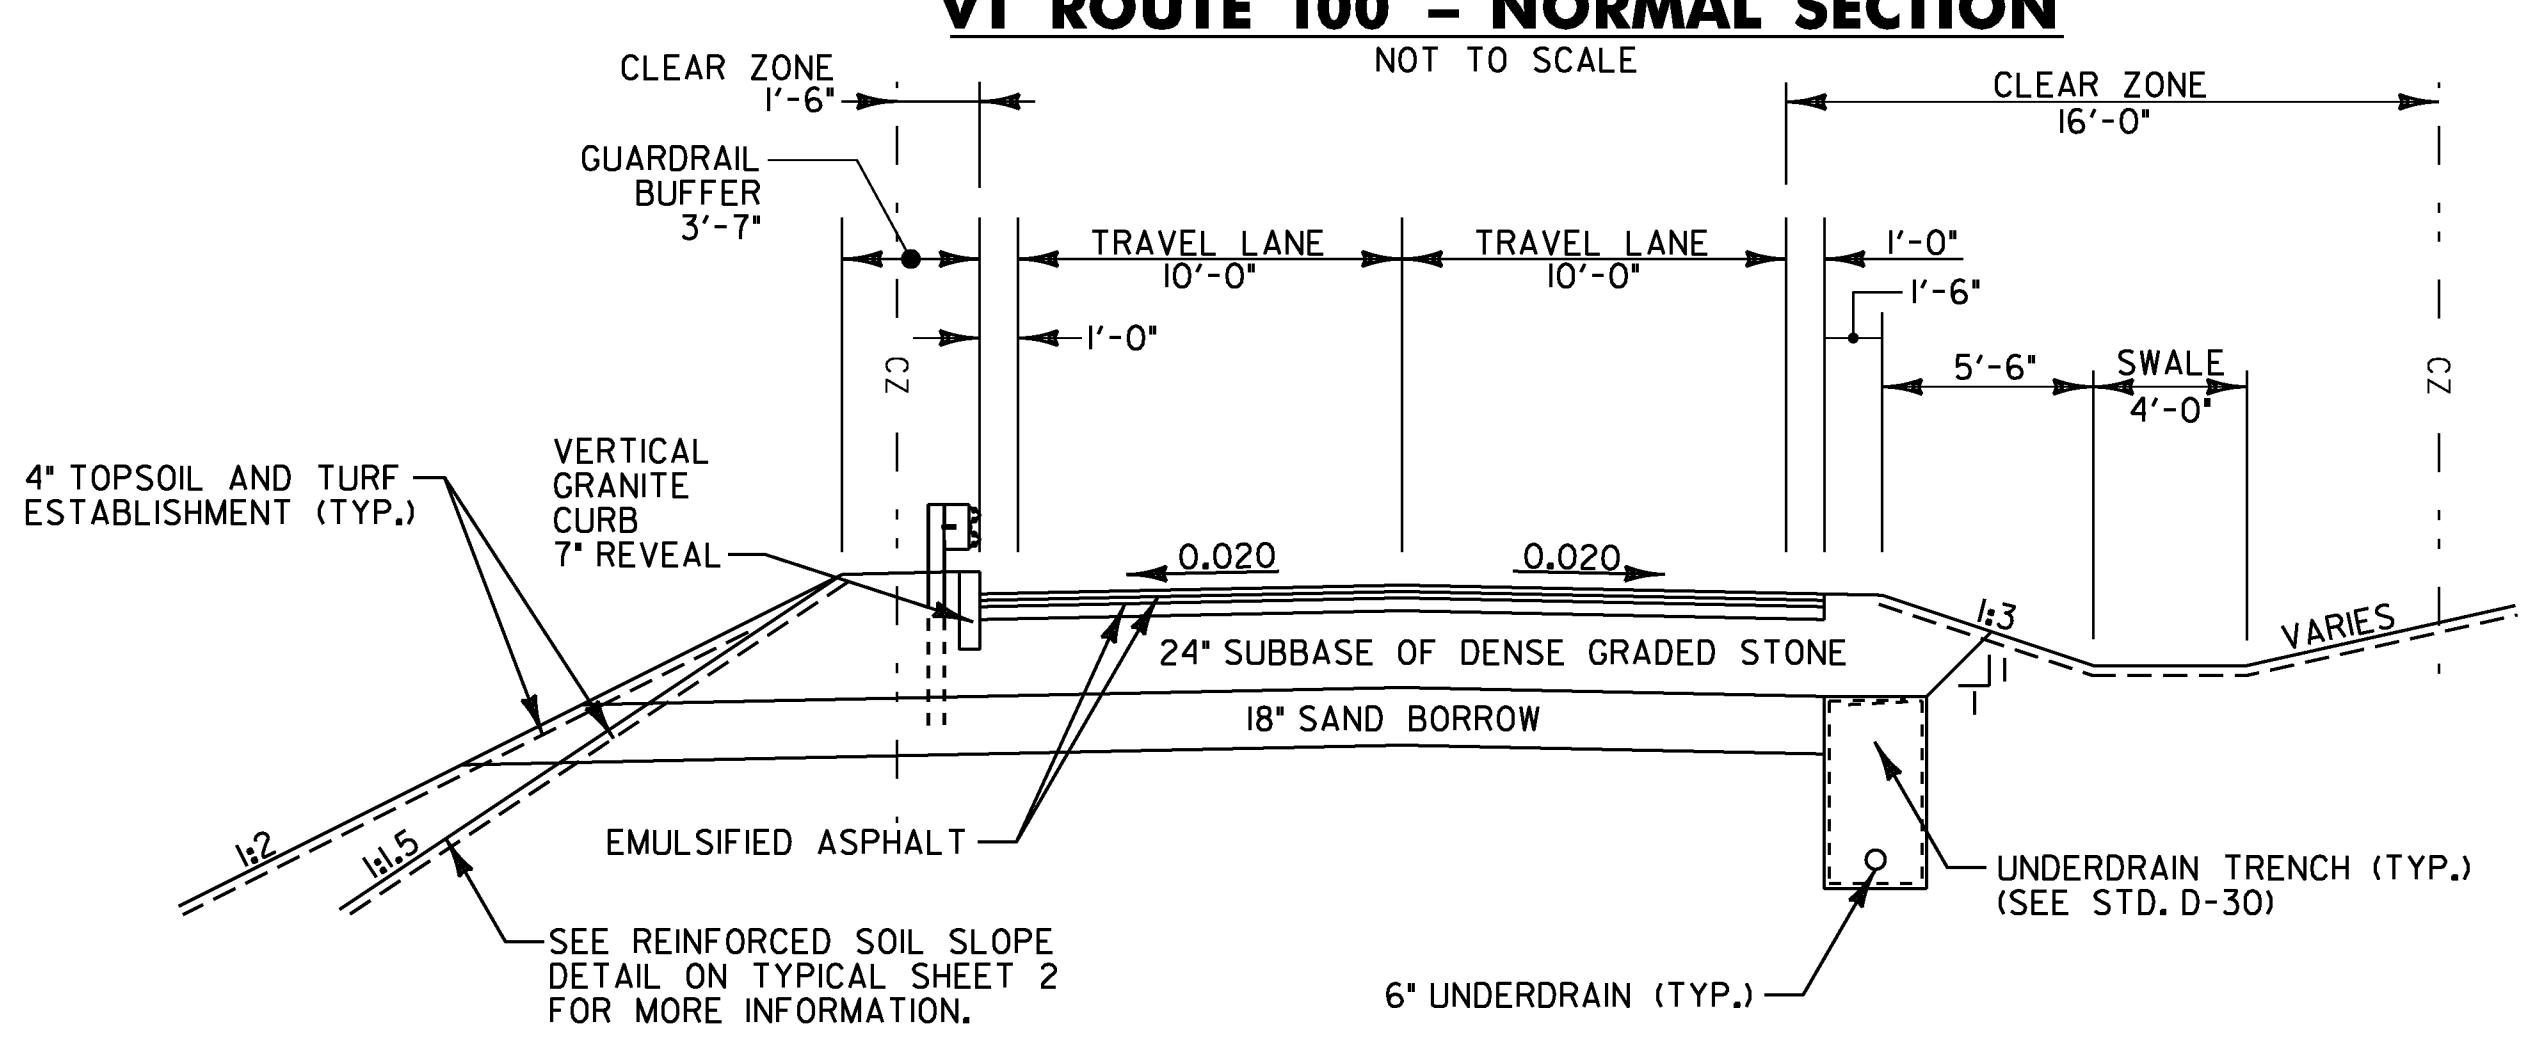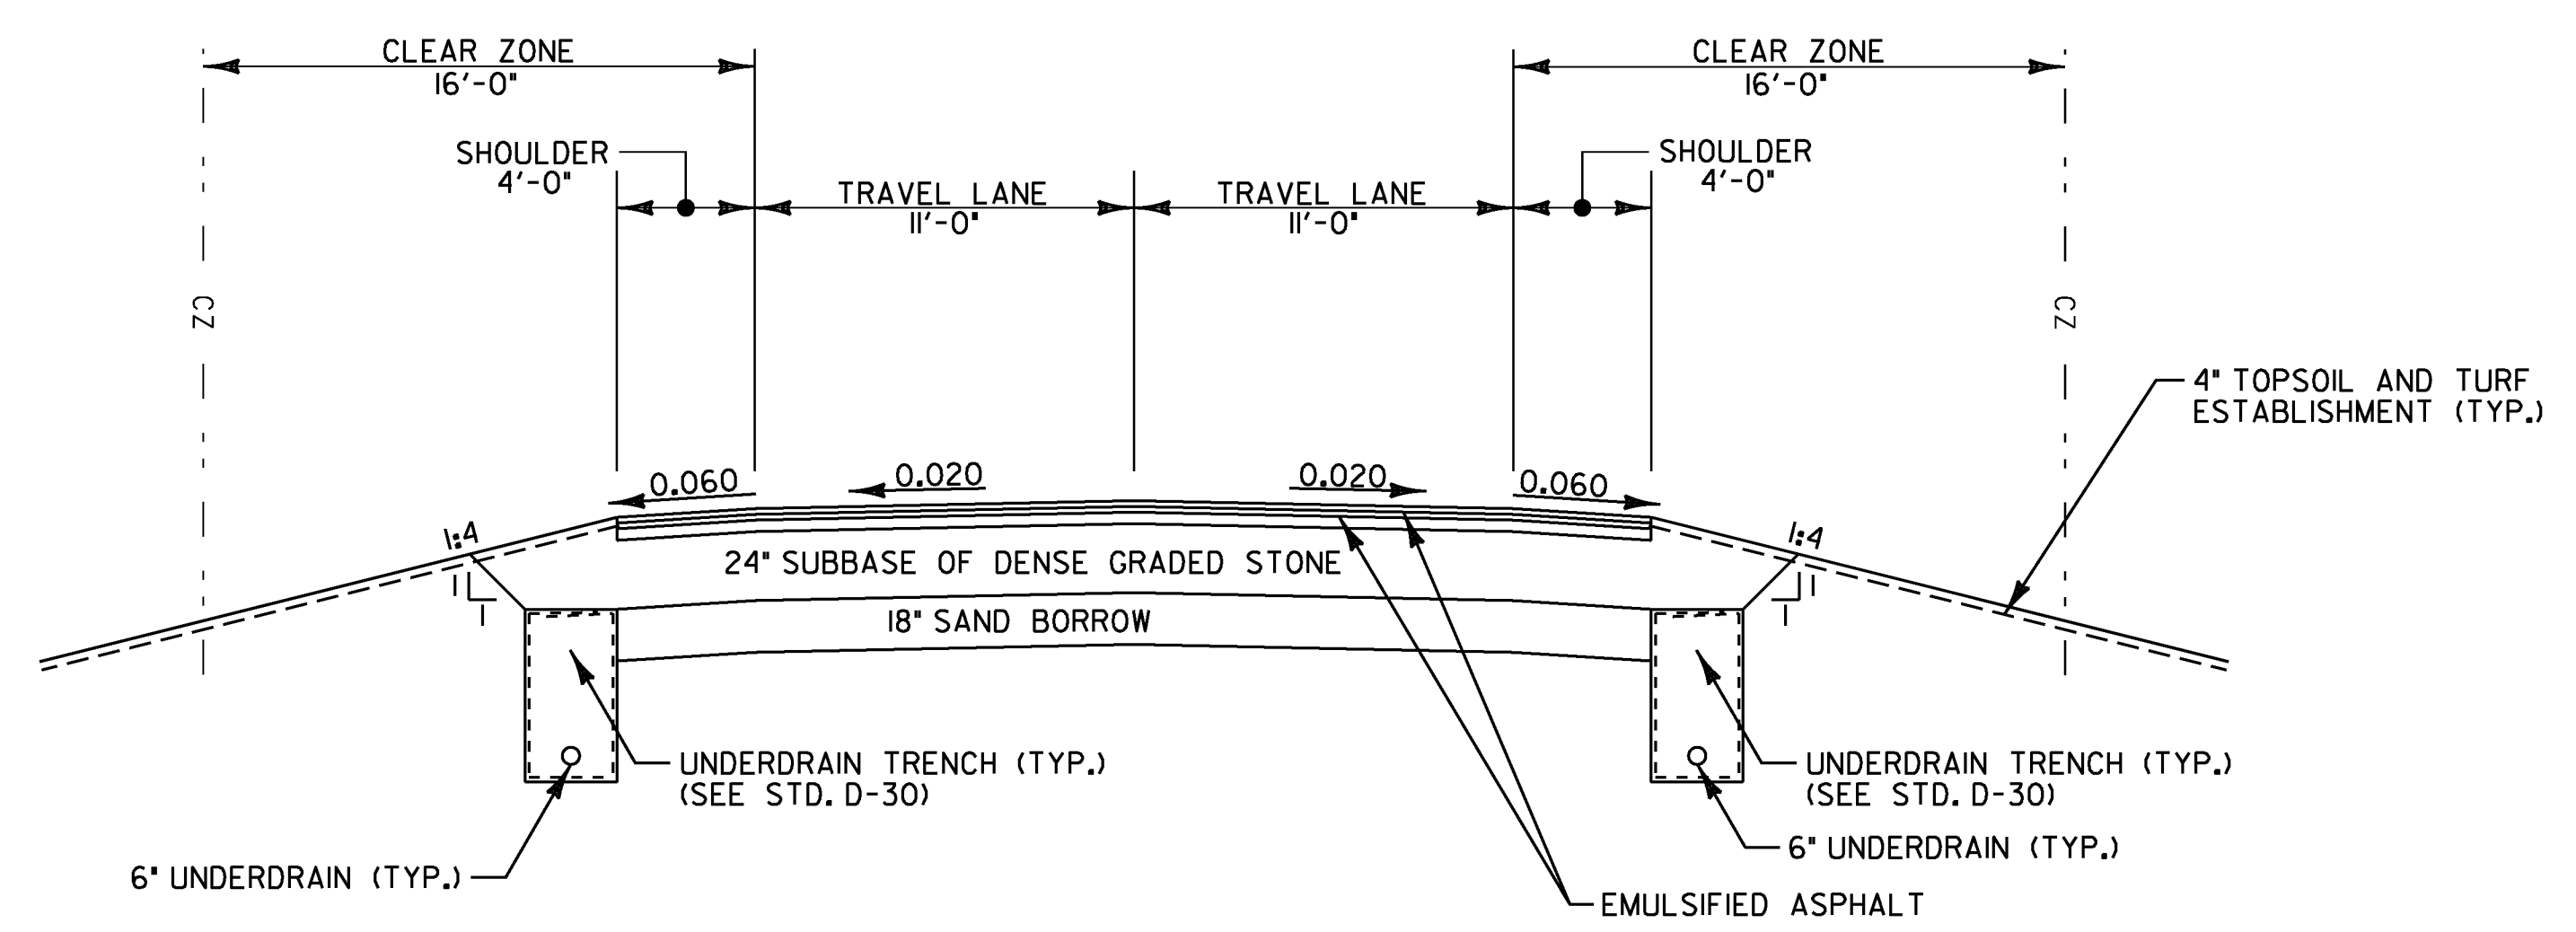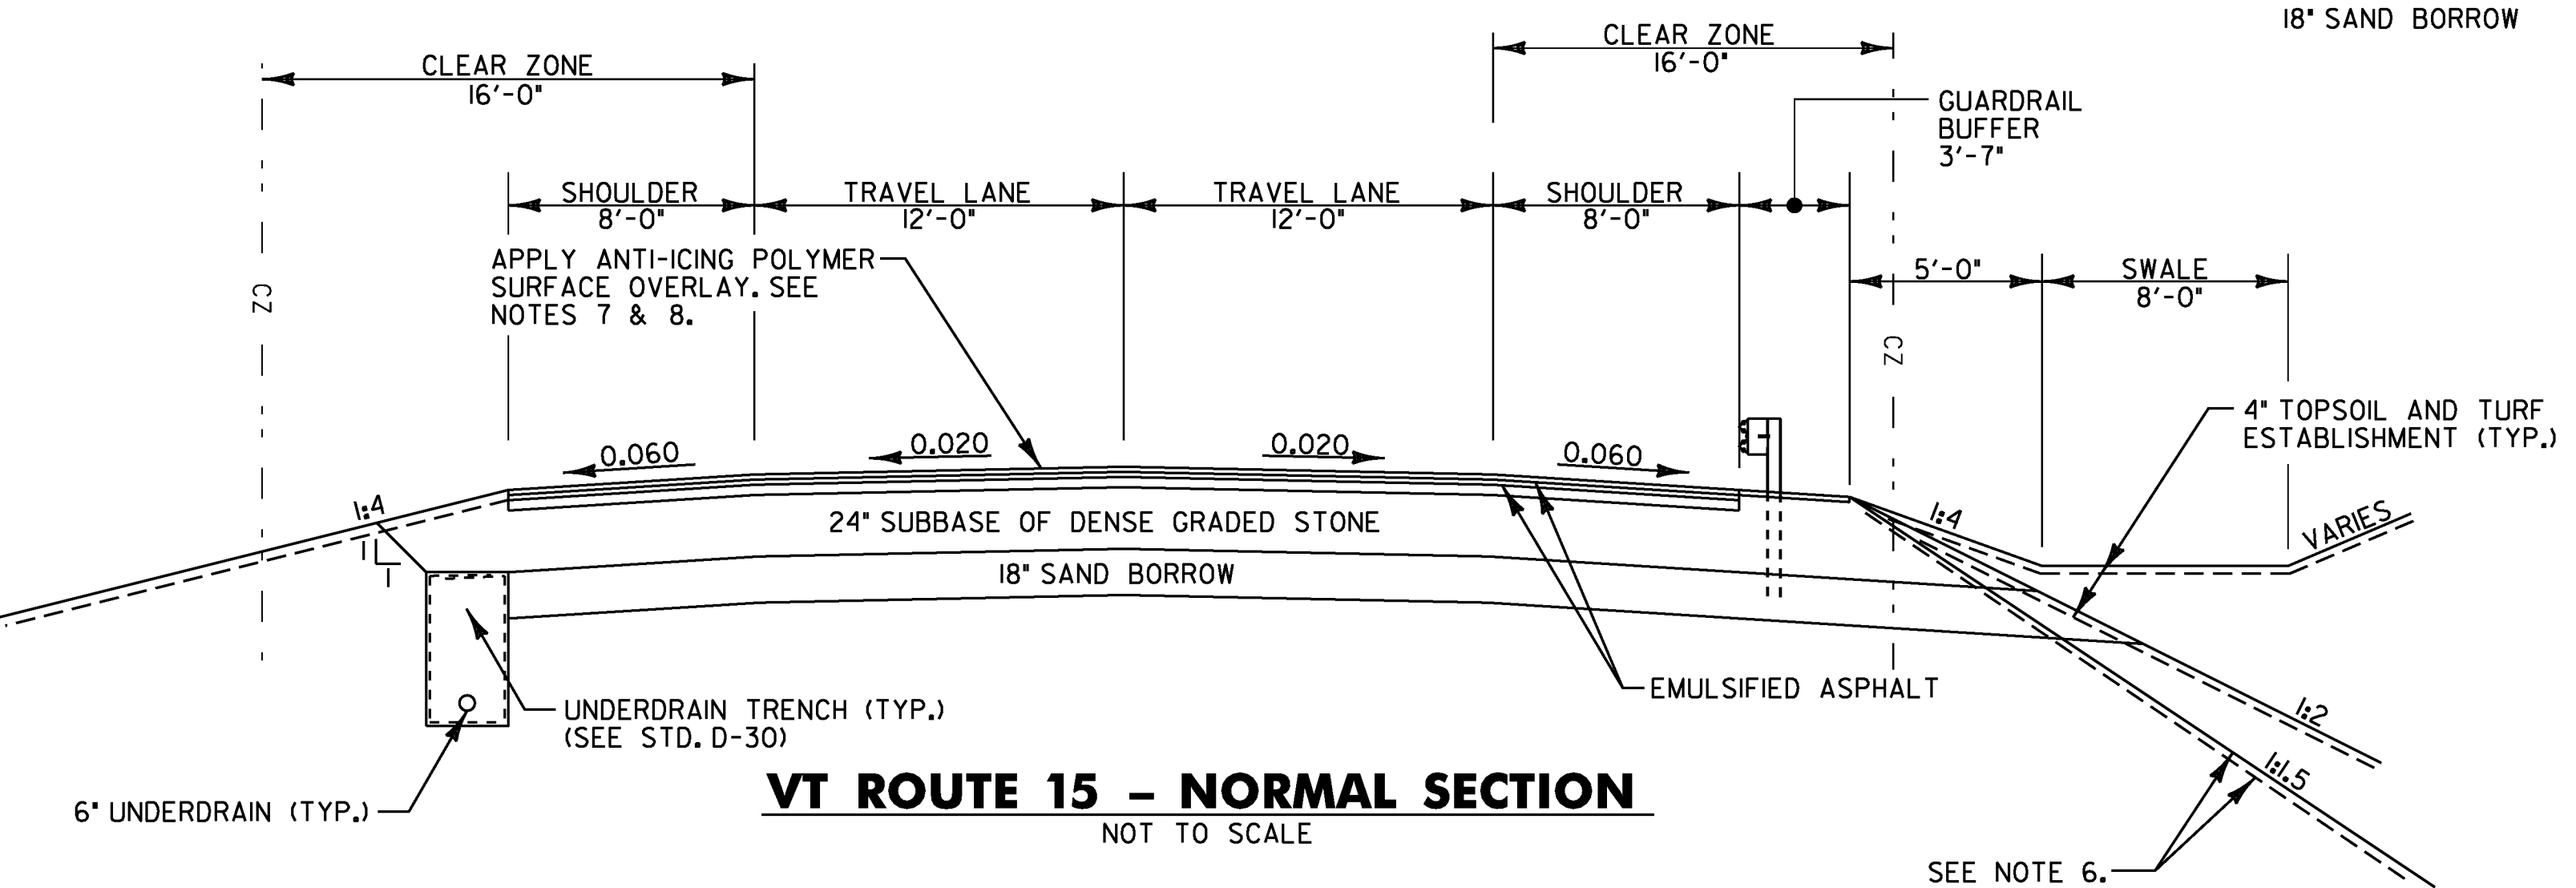

PROJECT NAME:	HYDE PARK
PROJECT NUMBER:	HES 030-2(23)
FILE NAME:	+08b126frm.dgn
PROJECT LEADER:	JLS
DESIGNED BY:	MBL
TYPICAL SECTIONS SHEET 1	
PLOT DATE:	21-DEC-2010
DRAWN BY:	MBL
CHECKED BY:	JAD
SHEET 3	OF 100