





MEUG16-31"
(formerly MEUGL-UM)

Designed to supply unmetered power to remote locations.
Typical applications included parking lot lighting, pump stations, and street lighting.

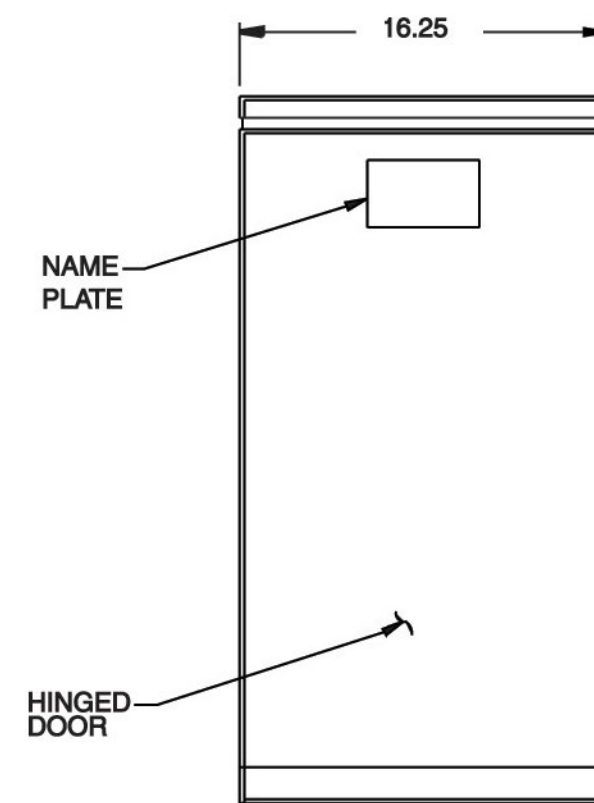


APPROVED

FRONT VIEW

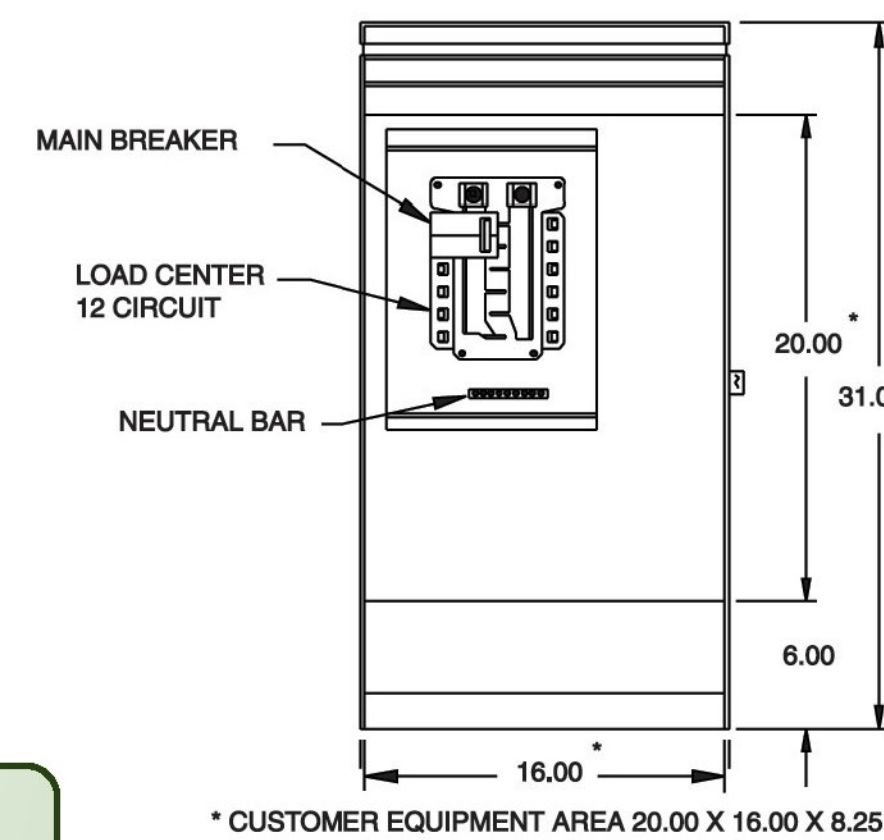

FRONT VIEW
LESS DOOR, DEADFRONT, AND COVER

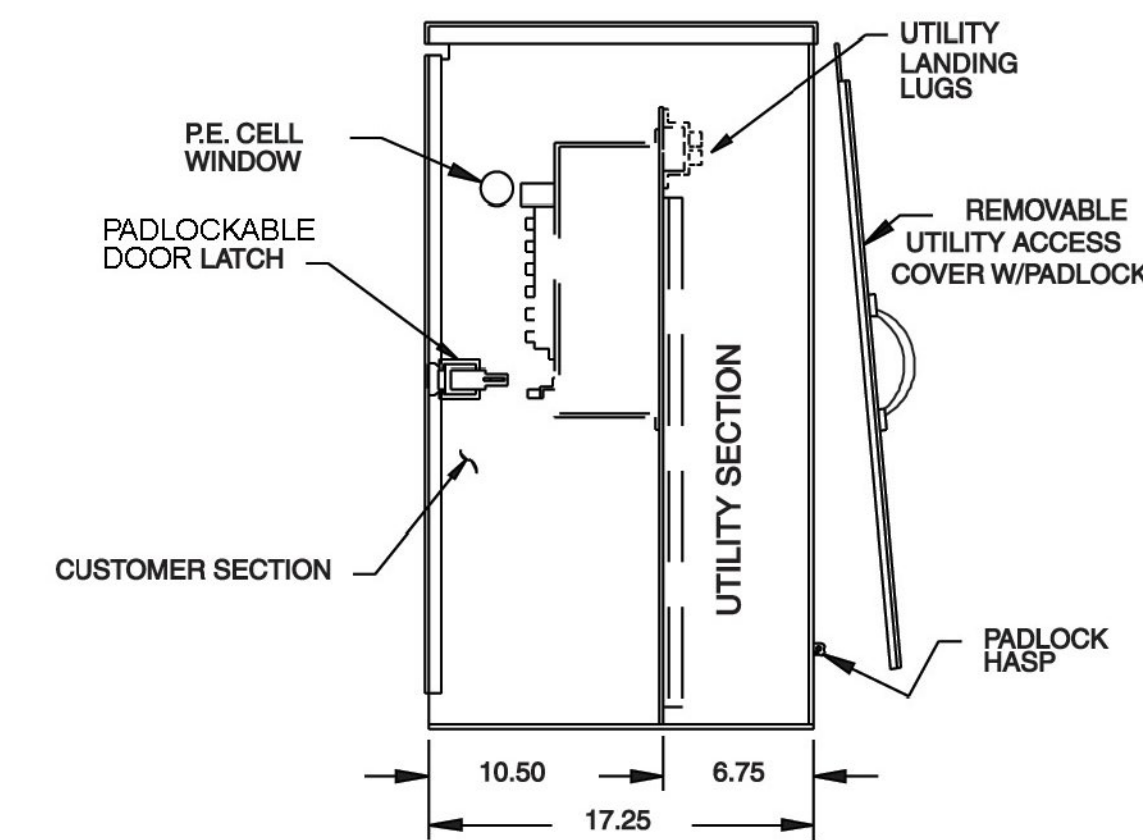

SIDE VIEW

STANDARD FEATURES

- Standard voltage 120/240V 1Ø 3W.
- 12 circuit copper bussed interior.
- Main Breaker: 100 amps or 200 amps, 10k AIC.
- Utility Landing Lugs: 200 amps, 250 kcmil.
- Vandal-resistant side hinged door and dead front.
- Light green powder coat finish in accordance with ASTM B-117.

OPTIONAL FEATURES

- Maximum voltage 480Y/277V 3Ø 4W (may affect optional equipment).
- 12 circuit interior may be increased to 30 circuit.
- Higher AIC available upon request.
- Aluminum and stainless steel cabinet.
- P.E. cell, test switch, lighting relay, receptacles may be added to standard.
- Some equipment modifications available. Consult your factory representative.
- Custom colors available.
- Pad Mounting Base available for concrete foundation. Order separately - MEUG16-BASE.
- Anchor Bolts, 5/8" dia. or 1/2" dia. Order separately - (quantity 4).

SPECIFICATIONS

- 12-gauge corrosion-resistant zinc-coated steel construction. Hood and covers 14-gauge.
- Rainproof Type 3R enclosure.
- Meets EUSERC 308 requirements.
- Acceptable circuit breakers are GE, ITE, Crouse-Hinds/Murray, Cutler-Hammer.

- All factory wiring is 600 volt rated copper.
- Suitable for use without main when no more than six service disconnects are installed and used in accordance with article 384 of the NEC.
- Listed by Underwriters Laboratories, Inc.