


VIP3D.xs Vehicle Presence Detection & Data Collection

Single slot direct plug-in module for type 170, 2070, NEMA TS1 & TS2 and ATC controllers

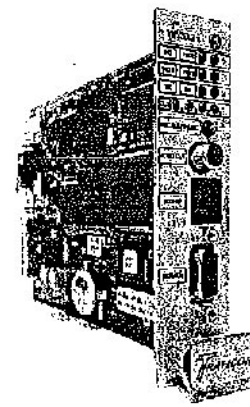

Single slot module VIP3D.2s

FEATURES

- » Stop bar and advance vehicle presence detection for intersection control
- » Up to 24 presence detection zones and 8 data collection zones for VIP3D.1s (up to 20 presence zones and 4 data zones per camera for VIP3D.2s)
- » Presence call delay and/or extension
- » Fail-safe outputs
- » Up to 24 cable-connected outputs and 20 inputs via I/O expansion modules
- » Traffic data collection
 - ✓ Count
 - ✓ Speed
 - ✓ Classification
 - ✓ Occupancy
 - ✓ Density
 - ✓ Headway
 - ✓ Gap time

BENEFITS

- » Single slot direct plug-in module, dual or single video input, rack space saving board
- » Field-proven performance, presence detection and data collection identical to VIP3.x and VIP/D
- » Easy to install, user-friendly setup, high mean time between failures (MTBF) and low mean time to repair (MTTR)


VIP3D.xs is a video detection solution that provides vehicle presence information to the intersection controller. VIP3D.xs integrates vehicle presence detection and traffic data collection in one module and provides a cost-effective and powerful solution for intersection control.

As a single slot module, VIP3D.xs plugs into all standard cabinet racks. The VIP3D.xs module interfaces directly to the controller via cable-connected outputs.

Configuration of VIP3D.xs is straightforward, a PC is not required. The technician connects a video monitor for a user-friendly setup with visualization of zone positioning and detection.

Zones for stop bar or advance presence detection can be combined logically to the fail-safe outputs.

VIP3D.xs provides all relevant traffic data and distinguishes between 5 levels of service for flow monitoring. VIP3D.xs emulates traditional double or single loop detectors.

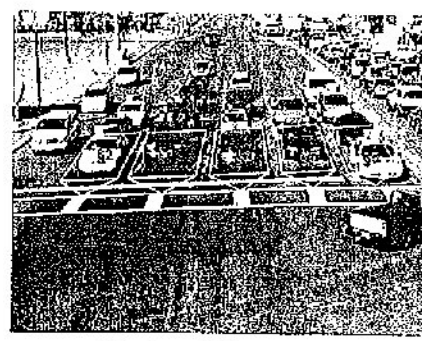

Stop bar vehicle detection