


DURABLE 4 INCH WHITE LINE, POLYUREA
 STA. 222+50 - STA. 227+50 (SOLID LT & RT)
TEMPORARY 4 INCH WHITE LINE, PAINT
 STA. 222+50 - STA. 227+50 (SOLID LT & RT)
DURABLE 4 INCH YELLOW LINE, POLYUREA
 STA. 222+50 - STA. 227+50 (DASHED RT, SOLID LT)
TEMPORARY 4 INCH YELLOW LINE, PAINT
 STA. 222+50 - STA. 227+50 (DASHED RT, SOLID LT)
6 INCH UNDERDRAIN PIPE
 STA. 225+50 - STA. 227+50 LT


CURVE #4
 DELTA = 0° 43' 02"
 D = 0° 34' 23"
 R = 10000.00'
 T = 62.58'
 L = 125.16'
 E = 0.20'
 BANKING NORMAL CROWN
 DESIGN SPEED 50 MPH
 SEE SUPERELEVATION DIAGRAMS
 FOR MORE INFORMATION

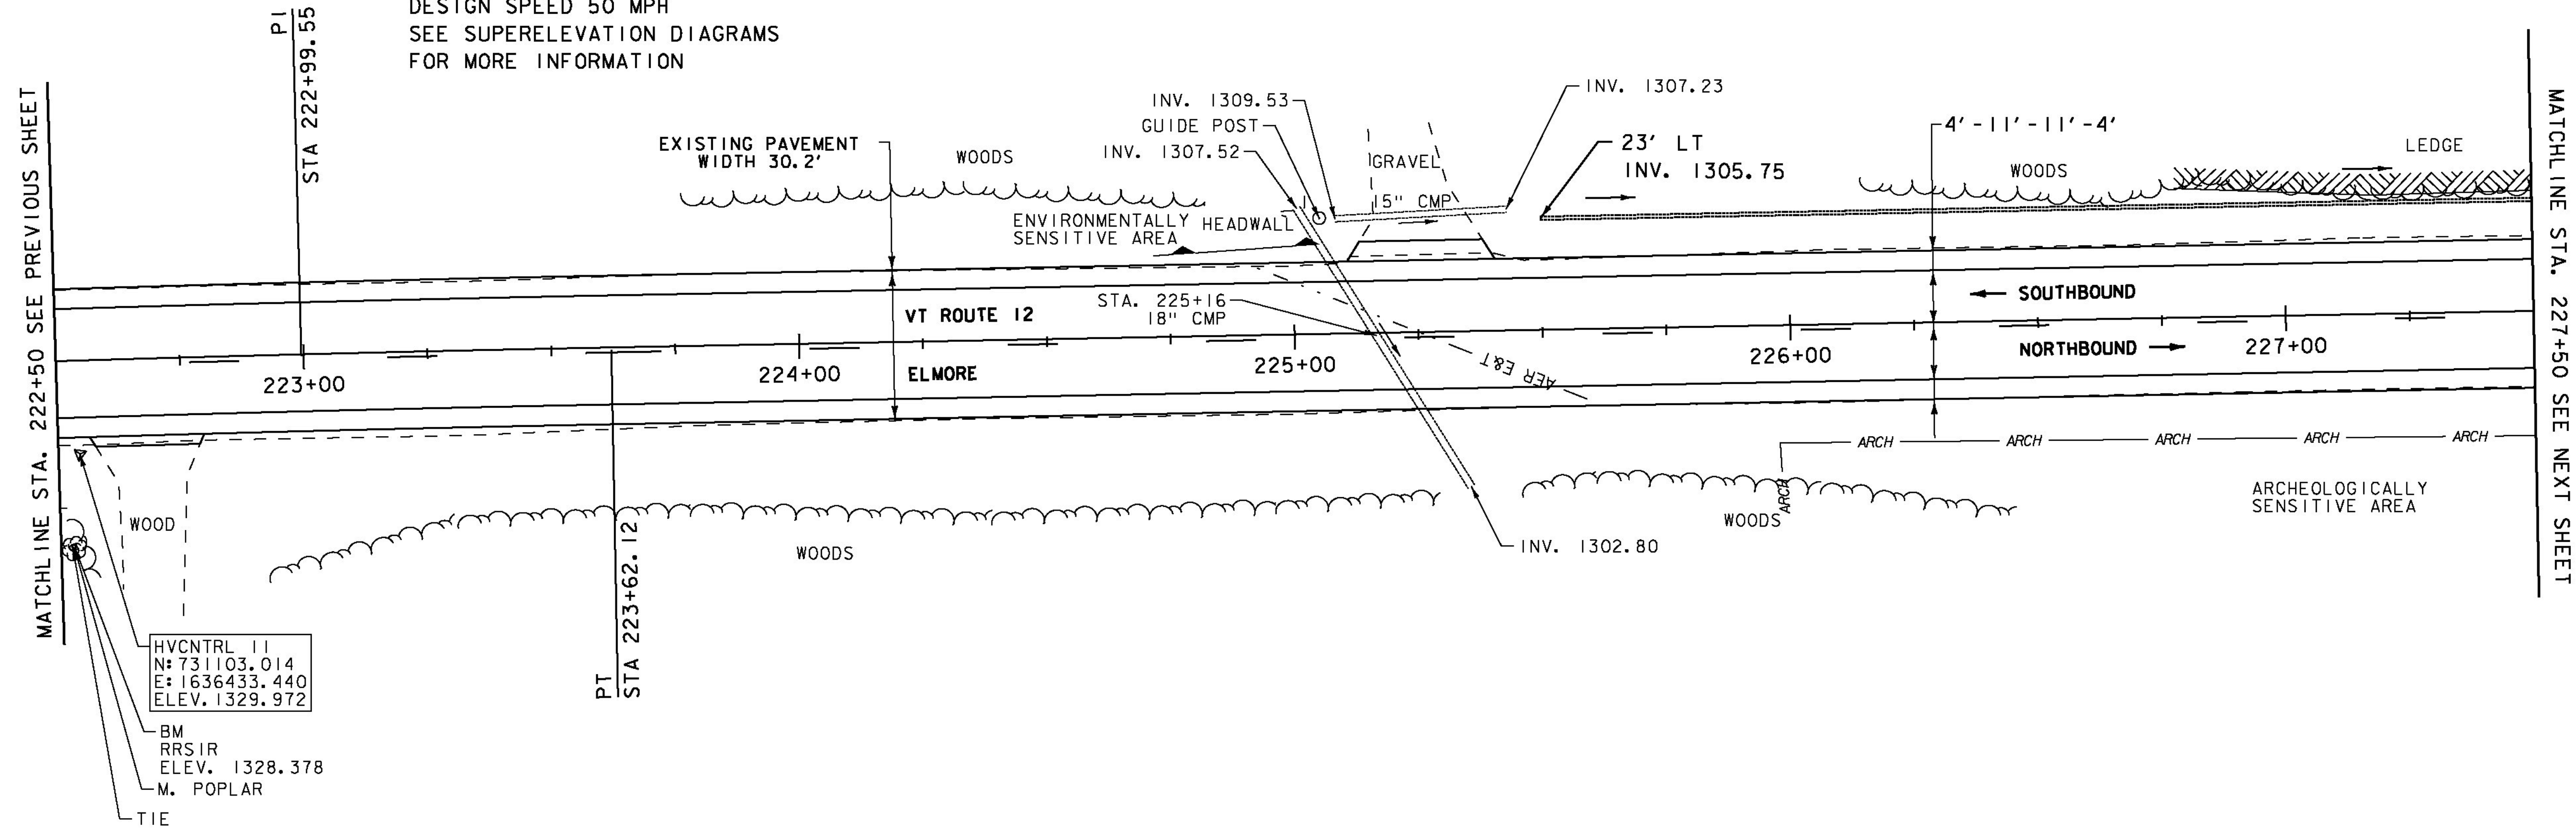

ENVIRONMENTALLY SENSITIVE LOCATIONS:

NO.	LIMITS	POS.	TYPE
4.	STA. 224+72 - STA. 225+05	LT	-

SIGN LEGEND
 R = REMOVE
 R&S = REMOVE AND SALVAGE
 RET = RETAIN
 S = SALVAGED
 N = NEW
 B-B = BACK TO BACK
 - - = EXISTING
 — = NEW



PROJECT LAYOUT SHEET 8

PROJECT NAME: ELMORE-MORRISTOWN

PROJECT NUMBER: STP 2937 (1)

FILE NAME: z11c310.dgn
 PROJECT LEADER: C. LATHROP
 DESIGNED BY: S. LAMPHERE
 PLOT FILE: z11c310_31.i

PLOT DATE: 3/3/14
 DRAWN BY: J. GOODALL
 CHECKED BY: C. LATHROP
 SHEET 31 OF 194