


**BEGIN /END PROJECT
CONSTRUCTION APPROACH SIGNING**

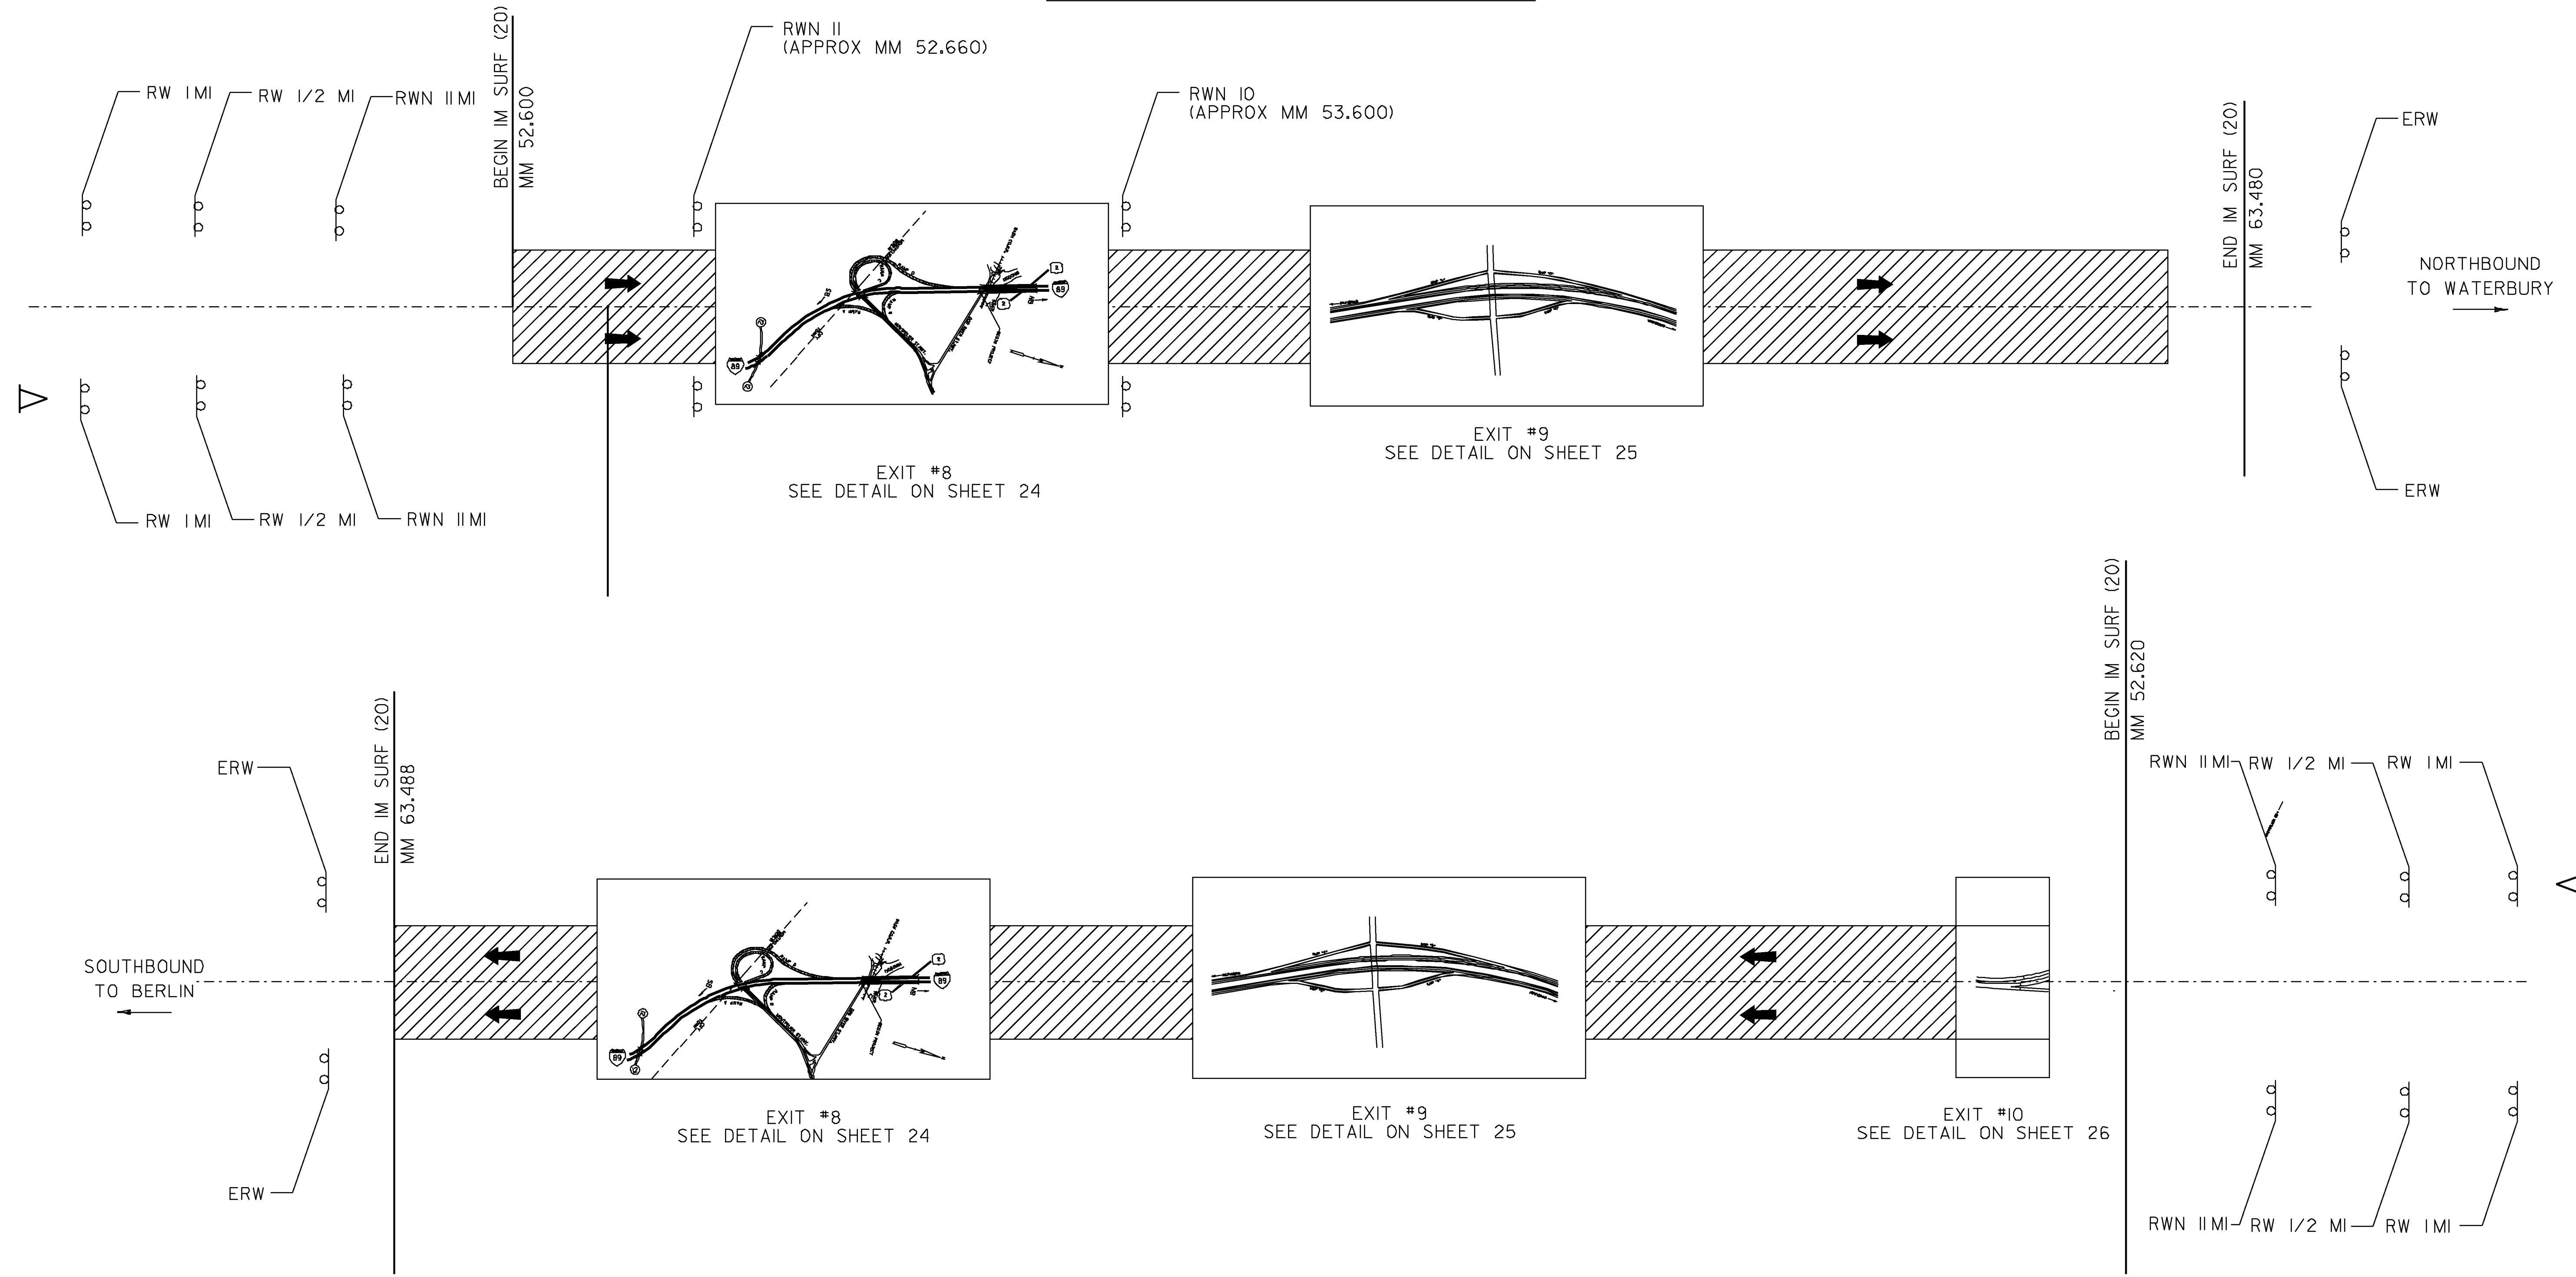

LEGEND

- RWN 11MILES = ROAD WORK NEXT 11 MILES
- ERW = END ROAD WORK
- RW 1MI = ROAD WORK IN 1 MILE
- RW 1/2 MI = ROAD WORK IN 1/2 MILE
- △ = PORTABLE CHANGEABLE MESSAGE SIGN
- ← = DIRECTION OF TRAFFIC FLOW

LIST OF CONSTRUCTION SIGNS - MAINLINE NB & SB

LOCATION	RW 1MI	RW 1/2 MI	RWN 11 MILES	ERW	PCMS
I-89 NORTHBOUND	2	2	2	2	1
I-89 SOUTHBOUND	2	2	2	2	1
TOTALS	4	4	4	4	2

NOT TO SCALE

**CONSTRUCTION
APPROACH
MAINLINE
SIGNING SHEET**

PROJECT NAME: BERLIN - WATERBURY	
PROJECT NUMBER: IM SURF (20)	
FILE NAME: /pave/09a382/p09a382.dgn	PLOT DATE: 21-MAY-2010
PROJECT LEADER: MIKE FOWLER	DRAWN BY: WILDER
DESIGNED BY: WILDER	CHECKED BY: PAVT MGMT
IPARM FILE NAME: p09a382_27.1	SHEET 27 OF 63

