STATE OF VERMONT
AGENCY OF TRANSPORTATION

REINFORCING STEEL SCHEDULE

ITEM	EACH	SIZE	LENGTH	MARK	TYPE	A	B	C	D	E	F	G	H	J	K	R	O
DECK																	
	196	5	35'- 4"	ES501	STR	35'- 4"											
	231	5	18'- 2"	ES502	STR	18'- 2"											
	231	5	24'- 2"	ES503	STR	24'- 2"											
	4	5	19'- 2"	ES504	STR	19'- 2"											
	4	5	25'- 5"	ES505	STR	25'- 5"											
	208	5	4'- 10"	ES506	S5	0'- 6"	1'- 2"	1'- 6"	1'- 2"			0'- 6"					
✳	277	6	5'- 3"	ES601	STR	5'- 3"											
WINGWALL #1																	
▲	5	5	30'- 2"	EW501	STR	30'- 2"											
	49	5	5'- 2"	EW502	S10		1'- 10"	1'- 6"	1'- 10"								
WINGWALL #2																	
▲	5	5	29'- 6"	EW501	STR	29'- 6"											
	48	5	5'- 2"	EW502	S10		1'- 10"	1'- 6"	1'- 10"								
WINGWALL #3																	
✳ ▲	6	5	8'- 6"	EW501	STR	8'- 6"											
	16	5	5'- 2"	EW502	S10		1'- 10"	1'- 6"	1'- 10"								
WINGWALL #4																	
▲	5	5	9'- 2"	EW501	STR	9'- 2"											
	17	5	5'- 2"	EW502	S10		1'- 10"	1'- 6"	1'- 10"								

ITEM	EACH	SIZE	LENGTH	MARK	TYPE	A	B	C	D	E	F	G	H	J	K	R	O

~ NOTES ~

1. UNLESS OTHERWISE DESIGNATED, ALL BAR REINFORCEMENT FOR CONCRETE IN SIZES UP TO AND INCLUDING NO. 18 SHALL CONFORM TO THE REQUIREMENTS OF THE "SPECIFICATIONS FOR DEFORMED BILLET-STEEL BARS FOR CONCRETE REINFORCEMENT", AASHTO M 31 (ASTM A 615-SI). ALL BARS SHALL BE GRADE 60, UNLESS OTHERWISE DESIGNATED.
2. FOR TYPICAL BENDING DETAILS, RECOMMENDED PIN DIAMETER "D" OF BENDS AND HOOKS, AND OTHER STANDARD PRACTICE, SEE CURRENT CONCRETE REINFORCING STEEL INSTITUTE "MANUAL OF STANDARD PRACTICE".
3. BARS WHICH REQUIRE MORE ACCURATE BENDING THAN STANDARD PRACTICES SHOULD HAVE LIMITS INDICATED.
4. ALL DIMENSIONS ARE OUT TO OUT OF BAR EXCEPT "A" AND "G" ON STANDARD 180 DEGREE AND 135 DEGREE HOOKS.
5. "J" DIMENSION ON 180 DEGREE HOOKS TO BE SHOWN ONLY WHERE NECESSARY TO RESTRICT HOOK SIZE. OTHERWISE, STANDARD HOOKS ARE TO BE USED.
6. "H" DIMENSION ON STIRRUPS TO BE SHOWN ONLY WHEN NECESSARY TO MAINTAIN CLEARANCES.
7. WHERE SLOPE DIFFERS FROM 45 DEGREES, DIMENSIONS "H" AND "K" MUST BE SHOWN.
8. ▲ DENOTES BARS TO BE CUT IN FIELD.
9. ✳ DENOTES ONE EXTRA BAR ADDED FOR TESTING PURPOSES.
10. △ DENOTES TWO EXTRA BARS ADDED FOR TESTING PURPOSES.
11. E IN BAR MARK PREFIX DENOTES EPOXY COATED REINFORCING STEEL.

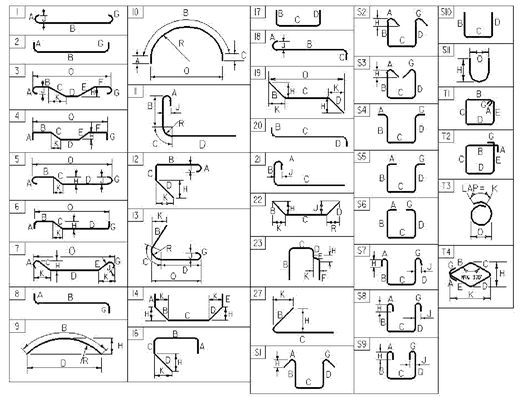

ASTM STANDARD REINFORCING BARS

BAR SIZE DESIGNATION	WEIGHT POUNDS PER FOOT	NOMINAL DIMENSIONS ROUND SECTION		
		DIAMETER INCHES	AREA INCHES^2	PERIMETER INCHES
#3	0.376	0.375	0.11	1.178
#4	0.668	0.500	0.20	1.571
#5	1.043	0.625	0.31	1.963
#6	1.502	0.750	0.44	2.356
#7	2.044	0.875	0.60	2.749
#8	2.670	1.000	0.79	3.142
#9	3.400	1.128	1.00	3.544
#10	4.303	1.270	1.27	3.990
#11	5.313	1.410	1.56	4.430
#14	7.65	1.693	2.25	5.32
#18	13.60	2.257	4.00	7.09

PROJECT NAME: **BROOKFIELD**
PROJECT NUMBER: **IM 089-1(59)**

FILE NAME: **s10a074rss.dgn**
PROJECT MANAGER: **C.P.WILLIAMS**
DESIGNED BY: **H.I.SALLS**
REINFORCING STEEL SCHEDULE

PLOT DATE: **6/28/2011**
DRAWN BY: **H.I. SALLS**
CHECKED BY: **L.J. STONE**
SHEET **10** OF **24**