

TEMPORARY 6 INCH WHITE LINE, PAINT  
DURABLE 6 INCH WHITE LINE, POLYUREA  
NORTHBOUND  
131.500 TO 134.500 SOLID RT  
131.500 TO 134.500 DASHED CL  
SOUTHBOUND  
131.500 TO 134.500 SOLID LT  
131.500 TO 134.500 DASHED CL

TEMPORARY 6 INCH YELLOW LINE, PAINT  
DURABLE 6 INCH YELLOW LINE, POLYUREA  
NORTHBOUND  
131.500 TO 134.500 SOLID LT  
SOUTHBOUND  
131.500 TO 134.500 SOLID RT

REHAB. DROP INLETS,  
CATCH BASINS, OR MANHOLES,  
CLASS I OR CLASS II

NORTHBOUND  
133.963 RT (DI)  
SOUTHBOUND  
132.094 RT (DI)  
132.572 RT (DI)


SPECIAL PROVISION  
(DECOMMISSION CURB DROP INLET)

NORTHBOUND  
132.296 RT (DI)  
132.343 RT (DI)  
132.940 RT (DI)  
132.987 RT (DI)  
133.764 RT (DI)  
133.810 RT (DI)  
133.858 RT (DI)  
SOUTHBOUND  
131.573 LT (DI)  
131.658 LT (DI)  
131.734 LT (DI)  
131.810 LT (DI)  
131.876 LT (DI)  
132.056 LT (DI)  
132.416 RT (DI)  
132.491 RT (DI)  
132.597 RT (DI)  
132.719 RT (DI)  
133.050 LT (DI)  
133.769 RT (DI)  
133.836 RT (DI)  
133.874 RT (DI)  
134.086 LT (DI)

BITUMINOUS CONCRETE CURB, TYPE A  
REMOVAL OF EXISTING CURB  
CABLE GUARDRAIL  
CABLE GUARDRAIL J-BOLT, GALVANIZED  
CABLE GUARDRAIL SPLICE UNIT  
REPLACEMENT OF GUARDRAIL CABLE  
STEEL BEAM GUARDRAIL, GALVANIZED  
MANUFACTURED TERMINAL SECTION, FLARED  
ANCHOR FOR STEEL BEAM RAIL  
REPLACE GUARDRAIL POST ASSEMBLY  
REPLACE GUARDRAIL BEAM UNIT  
REMOVAL AND DISPOSAL OF GUARDRAIL  
DELINEATOR WITH STEEL POST  
SEE ITEM DETAIL SUMMARY SHEETS

STONE FILL, TYPE I  
GEOTEXTILE UNDER STONE FILL  
SEE DITCH CLEANING SHEETS

REMOVING SIGNS  
AS SHOWN - 6

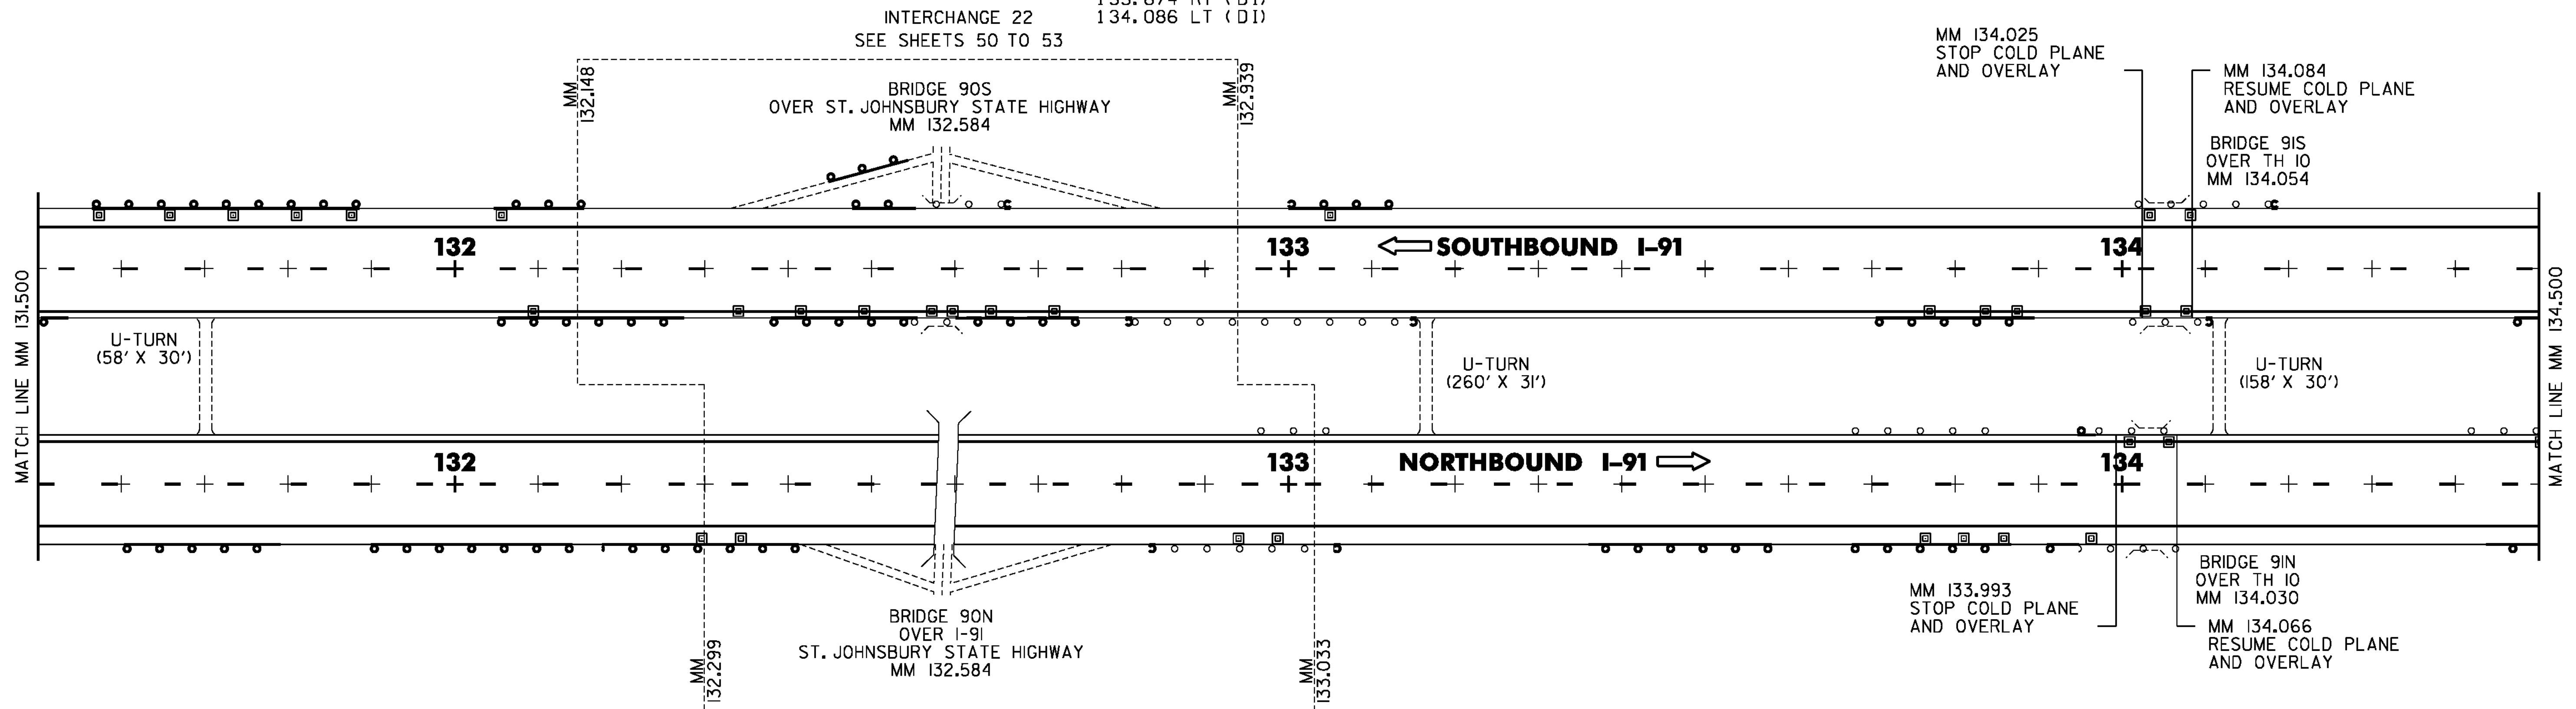

NORTHBOUND  
PAVEMENT CORES ( IN SHOULDERS)

#	MM	DEPTH	PCC
5	132.00	4.25	NO
6	132.50	5.00	NO
7	133.10	4.25	NO
8	133.50	5.25	NO
9	133.95	6.25	NO
10	134.50	4.50	NO


SOUTHBOUND  
PAVEMENT CORES ( IN SHOULDERS)

#	MM	DEPTH	PCC
20	132.00	6.50	NO
21	132.50	5.50	NO
22	133.00	8.00	NO
23	133.50	5.00	NO
24	134.00	4.00	NO
25	134.50	5.00	NO

SOUTHBOUND  
PAVEMENT CORES ( IN TRAVEL LANE)  
DATED 4/24/2013

#	MM	DEPTH	PCC	DESC
13	132.71	10.50	NO	RWP/TL
14	132.67	11.00	NO	RWP/TL
15	132.64	10.00	NO	RWP/TL
16	132.85	10.00	NO	LWP/PL
17	132.78	10.50	NO	LWP/PL
18	132.72	10.00	NO	LWP/PL

RWP=RIGHT WHEEL PATH TL=TRAVEL LANE  
LWP=LEFT WHEEL PATH PL=PASSING LANE

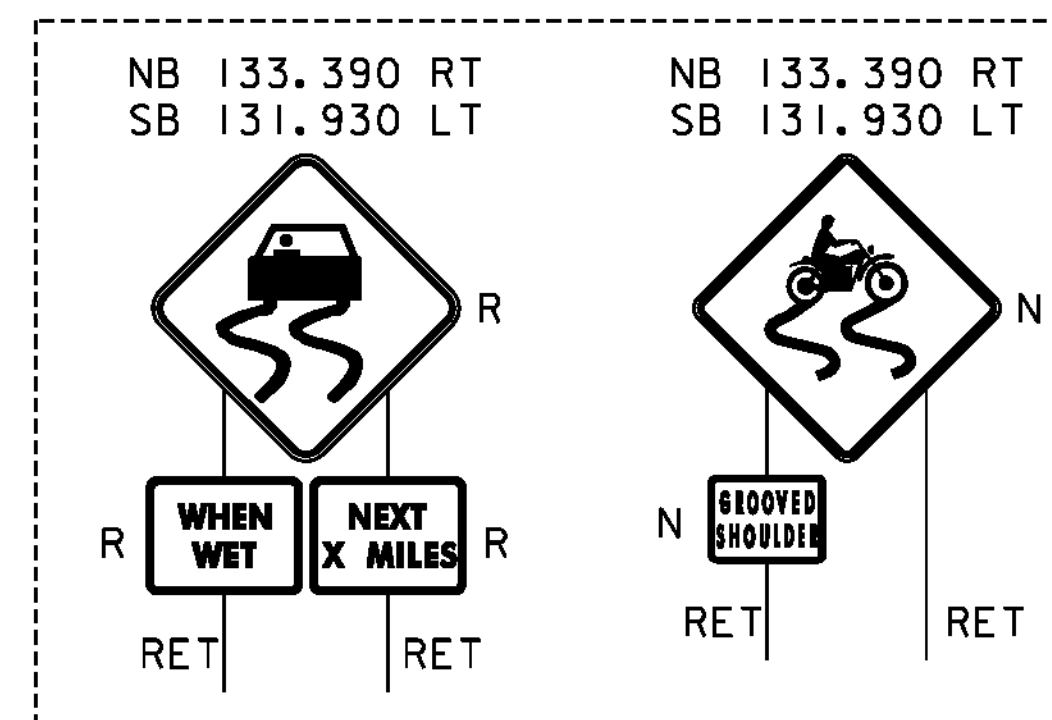

NOT TO SCALE

LEGEND

- R = REMOVE EXISTING
- S = SALVAGE
- R&S = REMOVE AND SALVAGE
- N = NEW
- RET = RETAIN
- B-B = BACK TO BACK
- = EXISTING GUARDRAIL
- = PROPOSED GUARDRAIL
- YL = YELLOW LINE
- WL = WHITE LINE
- = DELINEATOR

MAINLINE LAYOUT 2

PROJECT NAME: ST. JOHNSBURY-LYNDON

PROJECT NUMBER: IM 091-3(50)

FILE NAME: Ila346/cos/zlla346bdr\_nu.dgn  
PROJECT LEADER: PTS  
DESIGNED BY: NULL  
IPARM FILE NAME: plla346\_4l

PLOT DATE: 10/17/2013  
DRAWN BY: JLS  
CHECKED BY: PTS  
SHEET 41 OF 72