

TEMPORARY 6 INCH WHITE LINE, PAINT
DURABLE 6 INCH WHITE LINE, POLYUREA

NORTHBOUND
134.500 TO 137.121 SOLID RT
134.500 TO 137.121 DASHED CL
SOUTHBOUND
134.500 TO 137.214 SOLID LT
134.500 TO 137.214 DASHED CL

TEMPORARY 6 INCH YELLOW LINE, PAINT
DURABLE 6 INCH YELLOW LINE, POLYUREA

NORTHBOUND
134.500 TO 137.121 SOLID LT
SOUTHBOUND
134.500 TO 137.214 SOLID RT

REHAB. DROP INLETS,
CATCH BASINS, OR MANHOLES,
CLASS I OR CLASS II

SOUTHBOUND
135.199 LT (DI)
137.128 LT (DI)

SPECIAL PROVISION
(CAP CURB DROP INLET)

SOUTHBOUND
136.108 RT (DI) (PLUGGED)


SPECIAL PROVISION
(DECOMMISSION CURB DROP INLET)

NORTHBOUND
134.502 LT (DI)
134.558 LT (DI)
134.606 LT (DI)
134.815 LT (DI)
134.860 LT (DI)
135.914 RT (DI)
135.952 RT (DI)
136.018 RT (DI)
136.075 RT (DI)
136.122 RT (DI)
SOUTHBOUND
135.294 RT (DI)
135.332 RT (DI)
135.370 RT (DI)
135.673 RT (DI)
135.995 RT (DI)
136.033 RT (DI)
136.687 LT (DI)
136.857 LT (DI)
137.009 LT (DI)

REMOVAL OF EXISTING CURB
CABLE GUARDRAIL
CABLE GUARDRAIL J-BOLT, GALVANIZED
CABLE GUARDRAIL SPICE UNIT
REPLACEMENT OF GUARDRAIL CABLE
STEEL BEAM GUARDRAIL, GALVANIZED
MANUFACTURED TERMINAL SECTION, FLARED
ANCHOR FOR STEEL BEAM RAIL
REPLACE GUARDRAIL POST ASSEMBLY
REPLACE GUARDRAIL BEAM UNIT
REMOVAL AND DISPOSAL OF GUARDRAIL
DELINEATOR WITH STEEL POST
SEE ITEM DETAIL SUMMARY SHEETS

STONE FILL, TYPE I
GEOTEXTILE UNDER STONE FILL
SEE DITCH CLEANING SHEETS

REMOVING SIGNS
AS SHOWN - 9

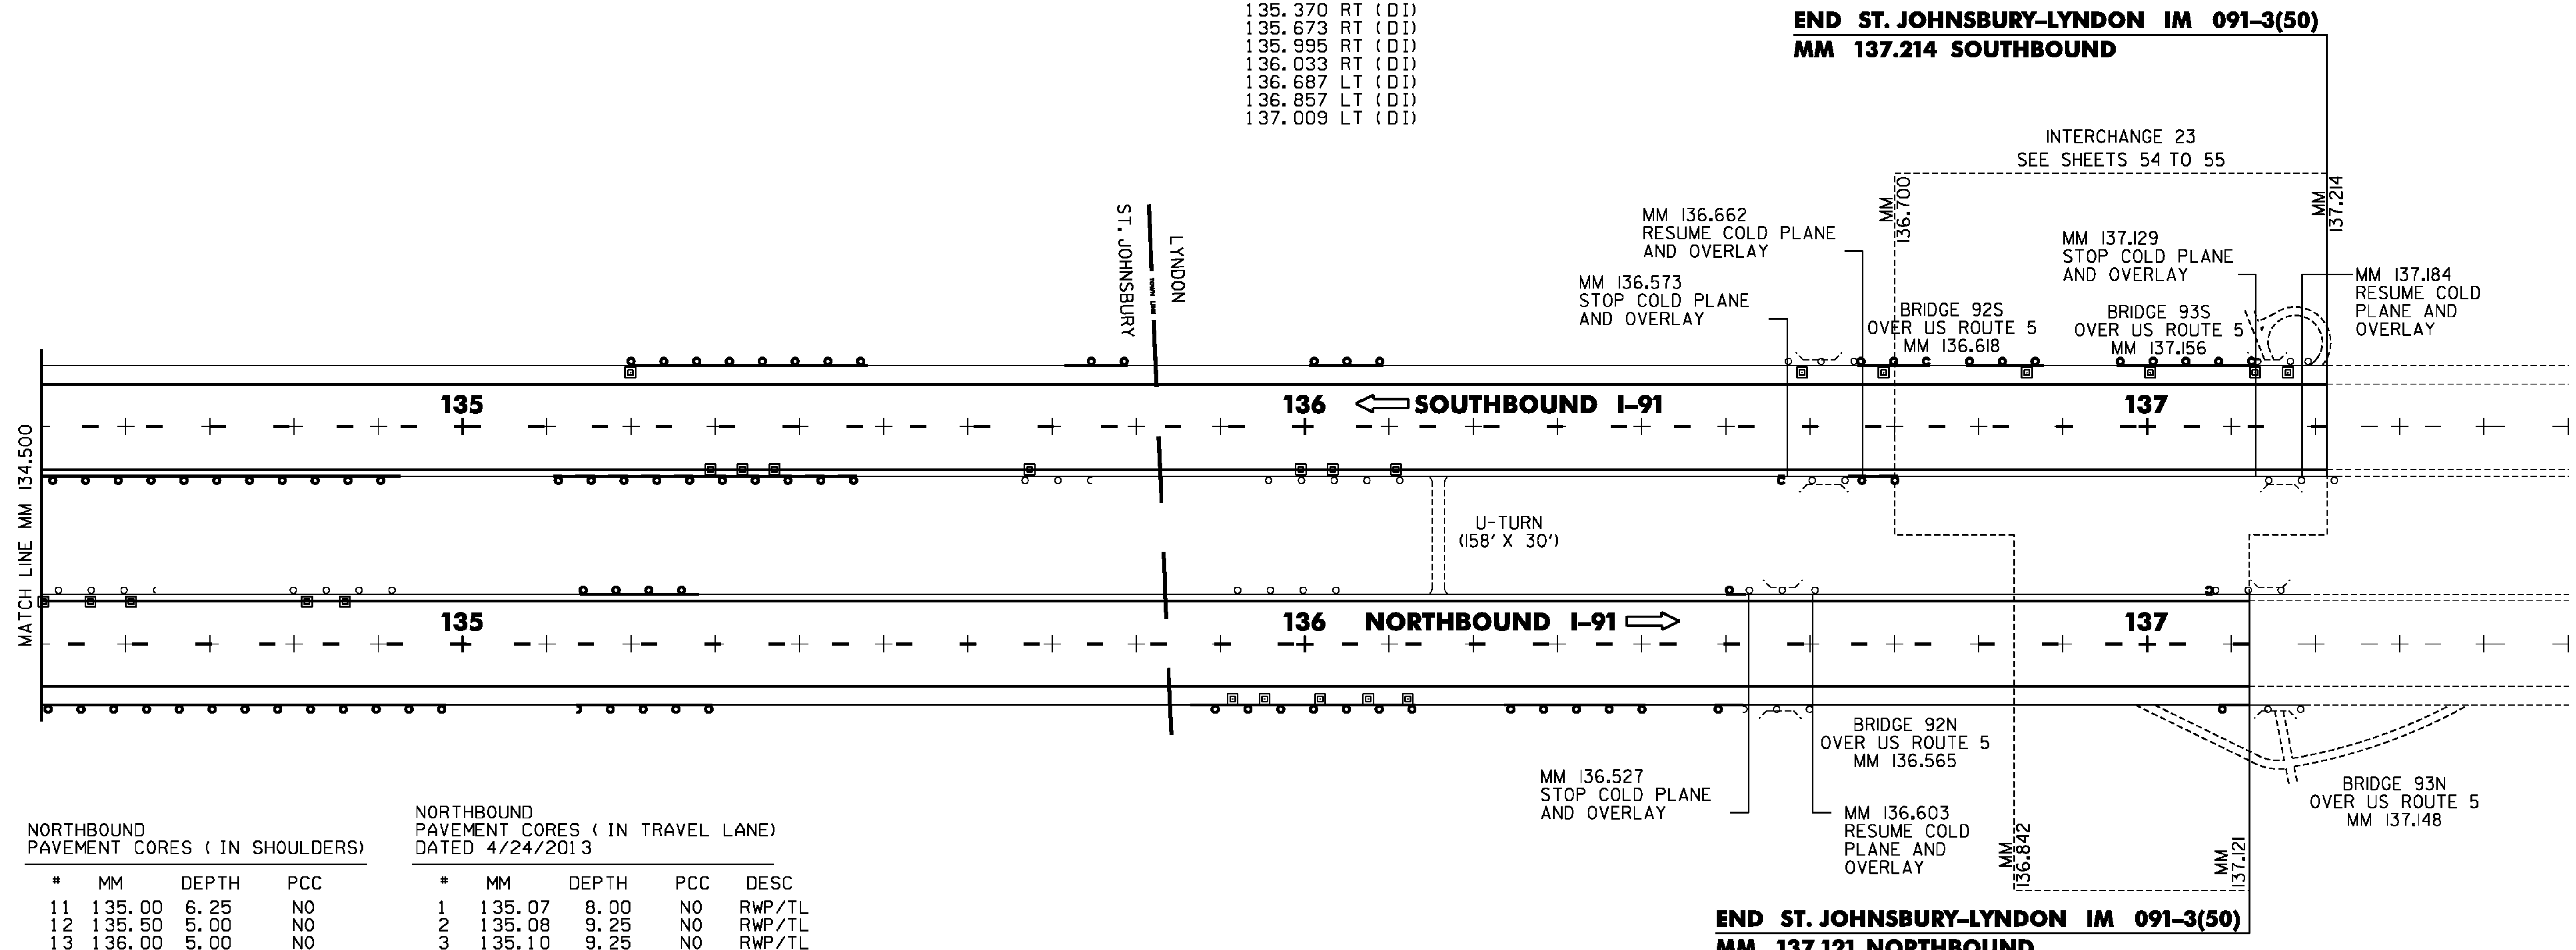

NORTHBOUND
PAVEMENT CORES (IN SHOULDERS)

#	MM	DEPTH	PCC
11	135.00	6.25	NO
12	135.50	5.00	NO
13	136.00	5.00	NO

NORTHBOUND
PAVEMENT CORES (IN TRAVEL LANE)
DATED 4/24/2013

#	MM	DEPTH	PCC	DESC
1	135.07	8.00	NO	RWP/TL
2	135.08	9.25	NO	RWP/TL
3	135.10	9.25	NO	RWP/TL
7	135.12	9.25	NO	LWP/PL
8	135.17	9.50	NO	LWP/PL
9	135.21	10.00	NO	LWP/PL

RWP=RIGHT WHEEL PATH TL=TRAVEL LANE
LWP=LEFT WHEEL PATH PL=PASSING LANE


SOUTHBOUND
PAVEMENT CORES (IN SHOULDERS)

#	MM	DEPTH	PCC
26	135.00	5.00	NO
27	135.50	4.75	NO
28	136.05	5.75	NO
29	136.50	6.00	NO
30	136.50	4.00	NO
31	137.10	4.00	NO

SOUTHBOUND
PAVEMENT CORES (IN TRAVEL LANE)
DATED 4/24/2013

#	MM	DEPTH	PCC	DESC
4	135.31	11.00	NO	RWP/TL
5	135.26	9.50	NO	RWP/TL
6	135.21	10.00	NO	RWP/TL
10	135.26	9.75	NO	LWP/PL
11	135.19	9.00	NO	LWP/PL
12	135.12	10.00	NO	LWP/PL

RWP=RIGHT WHEEL PATH TL=TRAVEL LANE
LWP=LEFT WHEEL PATH PL=PASSING LANE

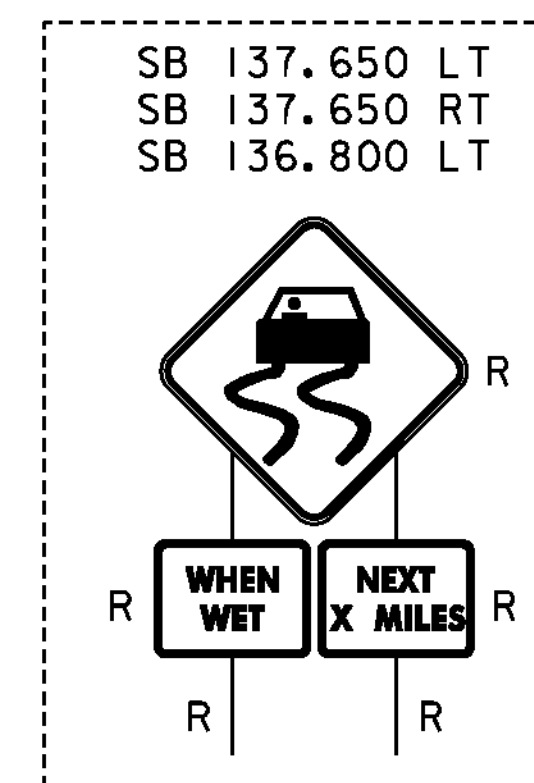

- LEGEND**
- R = REMOVE EXISTING
 - S = SALVAGE
 - R&S = REMOVE AND SALVAGE
 - N = NEW
 - RET = RETAIN
 - B-B = BACK TO BACK
 - = EXISTING GUARDRAIL
 - = PROPOSED GUARDRAIL
 - YL = YELLOW LINE
 - WL = WHITE LINE
 - = DELINEATOR

MAINLINE LAYOUT 3

PROJECT NAME: ST. JOHNSBURY-LYNDON

PROJECT NUMBER: IM 091-3(50)

FILE NAME: Ila346/cos/zlla346bdr_nu.dgn PLOT DATE: 10/17/2013
PROJECT LEADER: PTS DRAWN BY: JLS
DESIGNED BY: NULL CHECKED BY: PTS
IPARM FILE NAME: plla346_42 SHEET 42 OF 72

NOT TO SCALE