


Certified by ISO9001 International Quality Control System

JXC-300CA Series LED Vehicular Lamps

Features & Specifications

- Compliance with ITE/Caltrans specifications
- Retrofit design & UV stabilized lens
- MIL-STD-883 mechanical vibration
- MIL-STD-810F moisture resistant
- Compliant to FCC Title 47
- Fully compatible with NEMA controllers/conflict monitors
- Wide viewing angle for span wire/mast arm mount

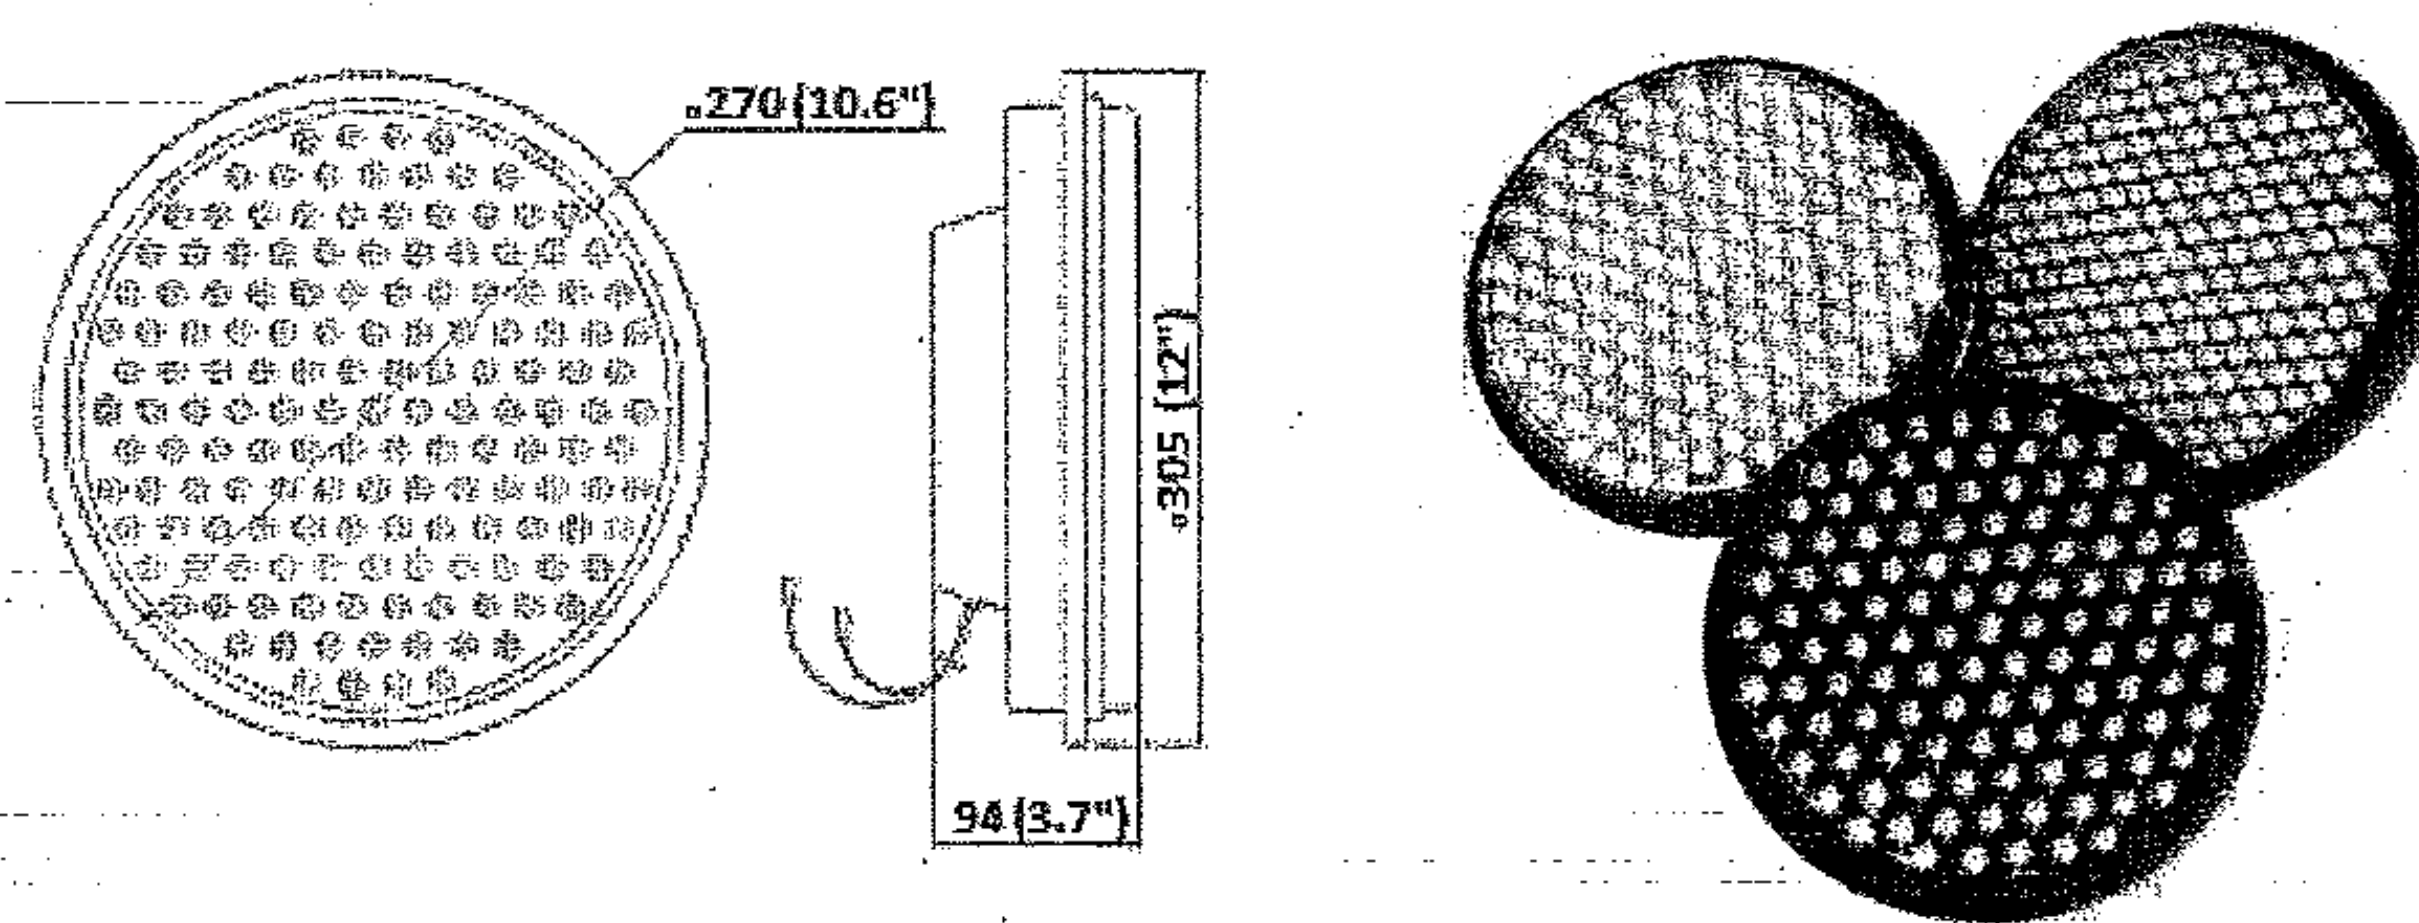

Model Number	JXC-300CAR	JXC-300CAY	JXC-300CAG
Size (mm)	300mm	300mm	300mm
Color (nm)	Red (626)	Yellow (592)	Green (505)
Voltage (Typical)	120V - 60hz	120V - 60hz	120V - 60hz
Voltage Range	80V - 135V	80V - 135V	80V - 135V
Power (w) Typical	10.5	17	12
Operation Temperature	-40°F to +165°F	-40°F to +165°F	-40°F to +165°F
Power Factor	> 0.9	> 0.9	> 0.9
T.H.D.	< 20%	< 20%	< 20%
ITE/Caltrans Specifications	Yes	Yes	Yes

All characteristics, including, chromaticity, moisture and vibration resistance, electronic noise, transient protection, etc., are conformed to standards specified in ITE LED Vehicle Signal Modules.