

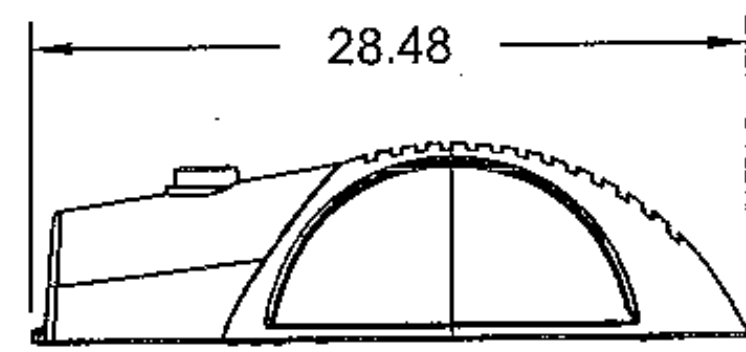
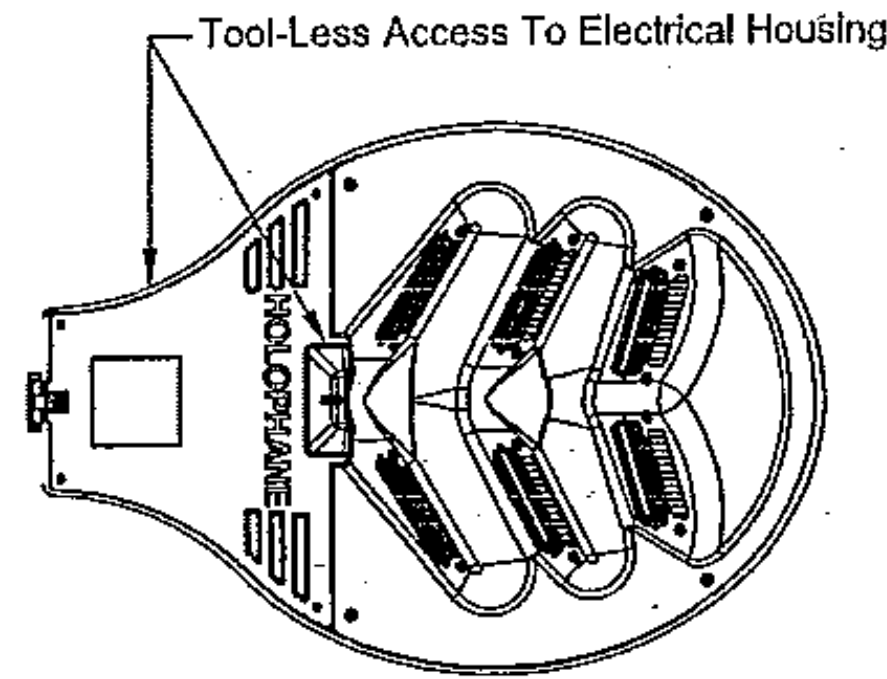


CAT# LEDG 060 70 4K AS K L3

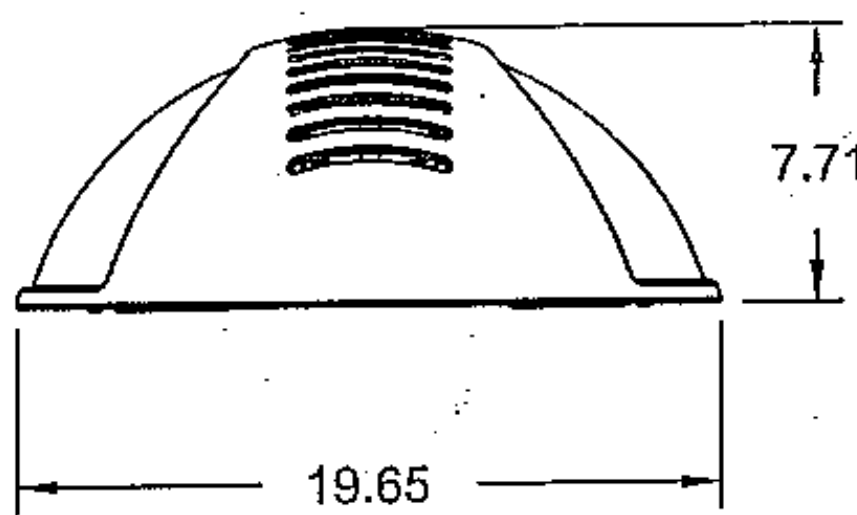

Weight = 28lbs
EPA = .62



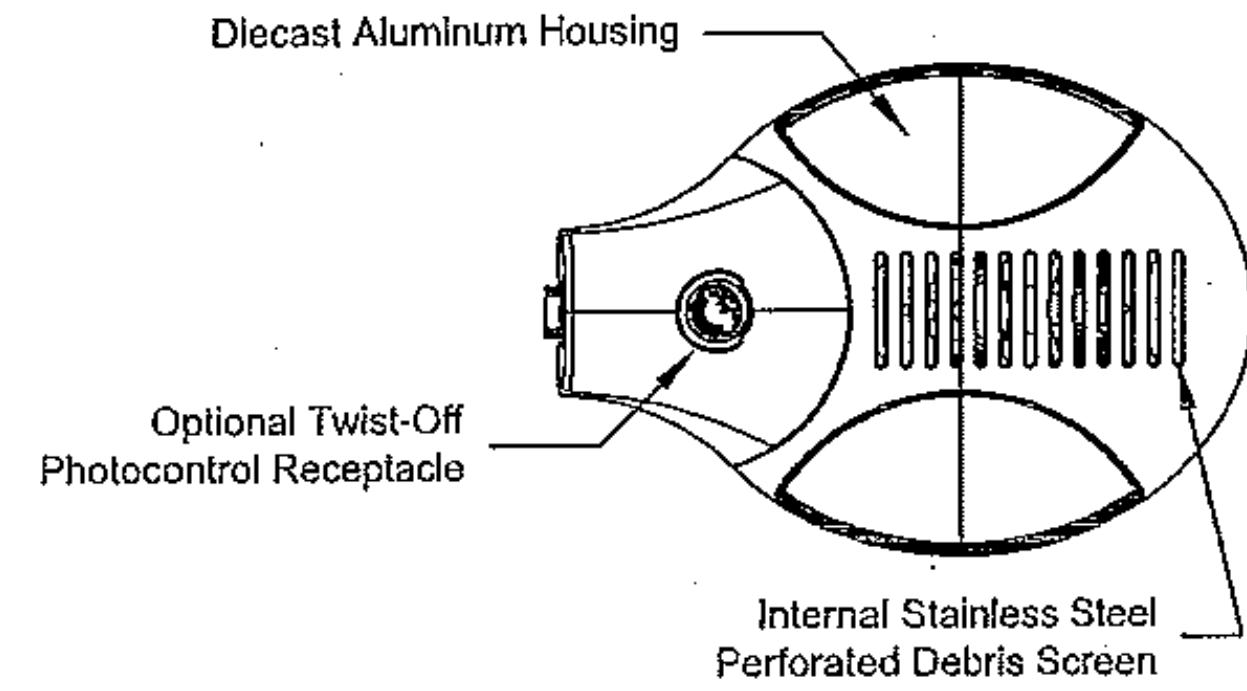


LEDGEND™
LED Roadway Lighting

Functional
Outdoor

Customer Preferred: (Most Frequently Ordered Catalog Numbers)

LEDG 120 35 4K AS G L1 R F1
K L2
W

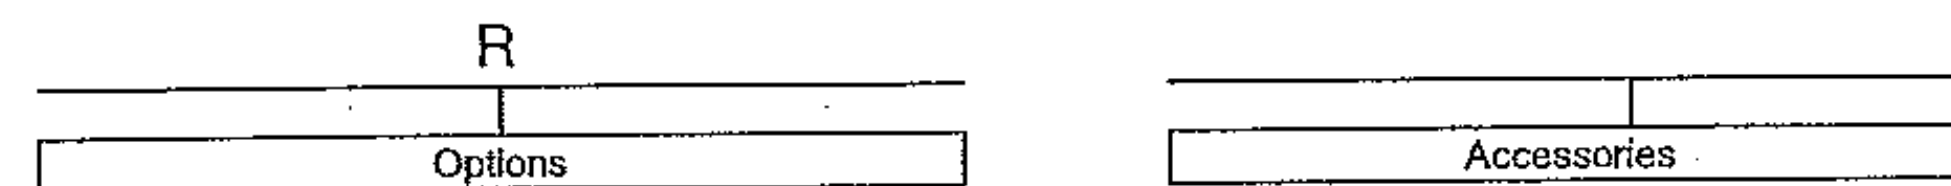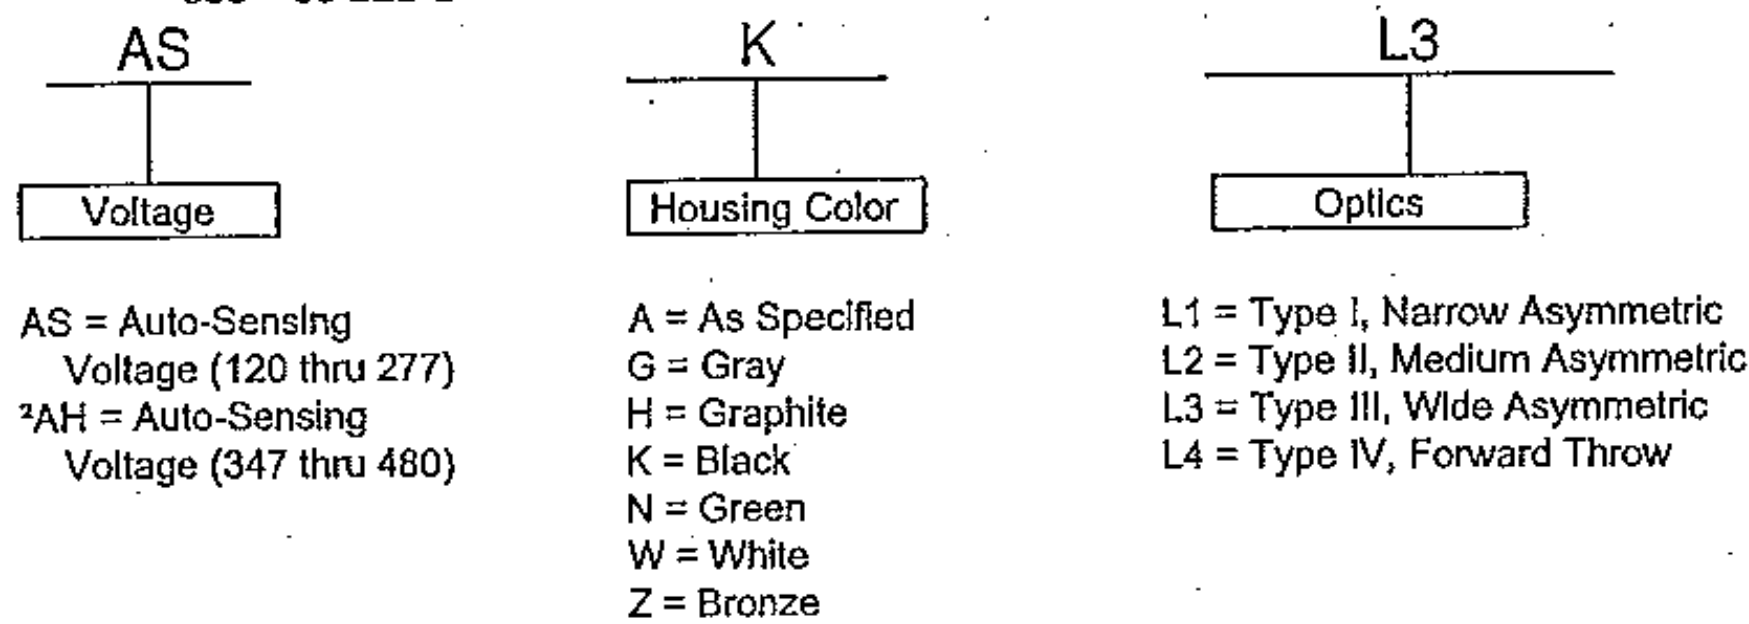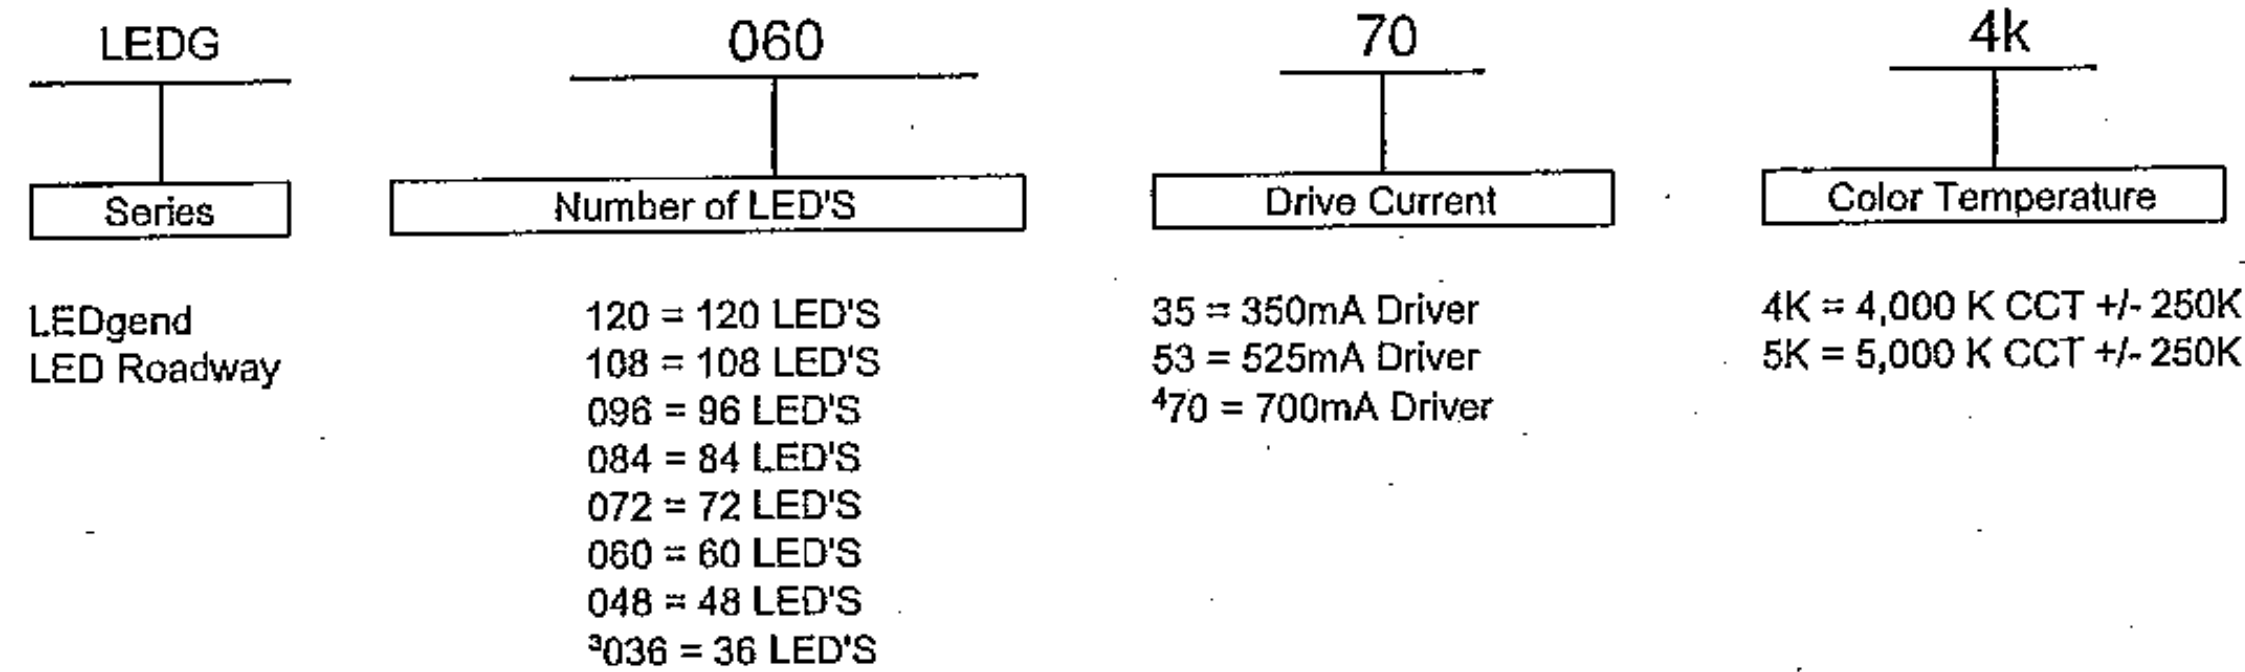

OPTIONS
B = Constant Lumen Output, Bi-Level Dimming
C = Constant Lumen Output
DE = ROAM CONCIERGE Dimming Control
VE = ROAMVIEW Dimming Control
EL = Extended Life - Driver
PCS = DTL Solid-State Lighting Photocontrol 120-277V
P34 = DTL Twist-Off Photocontrol 347V
P48 = DTL Twist-Off Photocontrol 480V
PSC = Shorting Cap
R = NEMA Twist-Off Photocontrol Receptacle
SP = Single Pack For UPS

ACCESSORIES
F1 = Single Fusing (120, 240, 277, 347V)
F2 = Double Fusing (208, 240, 480V)
BR-1055-XX = P2 Tenon Adapter
LEDGHSS = House Side Shield

NOTES:
*Not available with 36 LED's with 35 or 53 drive currents or with options B, C, DE, VE, EL or PCS
*Not available with B, C, DE or VE options with 53 drive current
*Not available with 120 LED's



© 2010 Acuity Brands Lighting, Inc., All Rights Reserved

THIS DRAWING, WHEN APPROVED, SHALL BECOME THE COMPLETE SPECIFICATION FOR THE MATERIAL TO BE FURNISHED BY HOLOPHANE ON THE ORDER NOTED ABOVE. A UNIT OF SIMILAR DESIGN MAY BE SUPPLIED, BUT ONLY AFTER APPROVAL BY THE CUSTOMER IN WRITING. ALL DIMENSIONS SHALL BE IN INCHES UNLESS OTHERWISE SPECIFIED. ALL DIMENSIONS SHALL BE SUPPLIED WITH EACH ANCHOR BOLT. ORDER TO MATCH THE POLE PROVIDED. THIS PRINT IS THE PROPERTY OF HOLOPHANE AND IS LOANED SUBJECT TO RETURN UPON DEMAND AND UPON EXPRESS WRITTEN NOTICE. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF HOLOPHANE. CONNECTION WITH MATERIAL FURNISHED BY HOLOPHANE.

ORDER #: _____
TYPE: _____
DRAWN: JRM
DATE: 10/31/12
DWG #: LUM_LEDG

ORDERING INFORMATION: