


- NOTES:
1. PROTRUSIONS CAUSED BY WELDING OR GALVANIZING ARE NOT PERMITTED ON THE ADJOINING SURFACES OF THE BOX BEAM RAILS, SPLICE TUBES AND FILL PLATES.
  2. FOUR (4) 3/4" DIAMETER FULLY THREADED BOLTS, 7 1/2" LONG WITH TWO (2) WASHERS AND A HEAVY HEX NUT ON EACH BOLT. NUT TO BE FINGER TIGHT AND THE FIRST THREAD BELOW THE NUT TO BE BURRED TO PREVENT DISLODGING. FOUR (4) BOLTS AT EACH SPLICE.

REVISIONS AND CORRECTIONS  
AUGUST 9, 2010 - ORIGINAL APPROVAL  
APRIL 23, 2012 - GENERAL UPDATE 2012  
FEBRUARY 10, 2014 - CORRECTED SPLICE BAR DETAILS

APPROVED  
*W. P. S.*  
STRUCTURES PROGRAM MANAGER  
*Richard F. Hunt*  
DIRECTOR OF PROGRAM DEVELOPMENT  
*Mark B. Richter*  
FEDERAL HIGHWAY ADMINISTRATION

# GUARDRAIL APPROACH SECTION, GALVANIZED 3 RAIL BOX BEAM

OTHER STDS. REQUIRED:

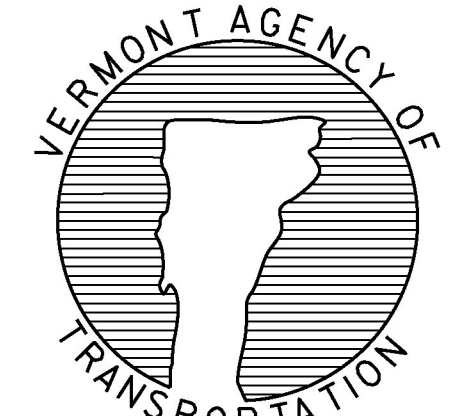

# STANDARD S-364C