


**US RTE. 7, VT. RTE. 22A, AND FERRISBURGH STATE HIGHWAY  
TYPICAL SECTION - ALTERNATE A  
PAVER PLACED SURFACE TREATMENT, TYPE C**

NOTE:

1. SPECIAL PROVISION (PAVER PLACED SURFACE TREATMENT, TYPE C)(PG 70-28)(SBS POLYMER)(3/4" LIFT THICKNESS) PAVEMENT TOLERANCE = +/- 1/8 INCH (TOTAL THICKNESS).

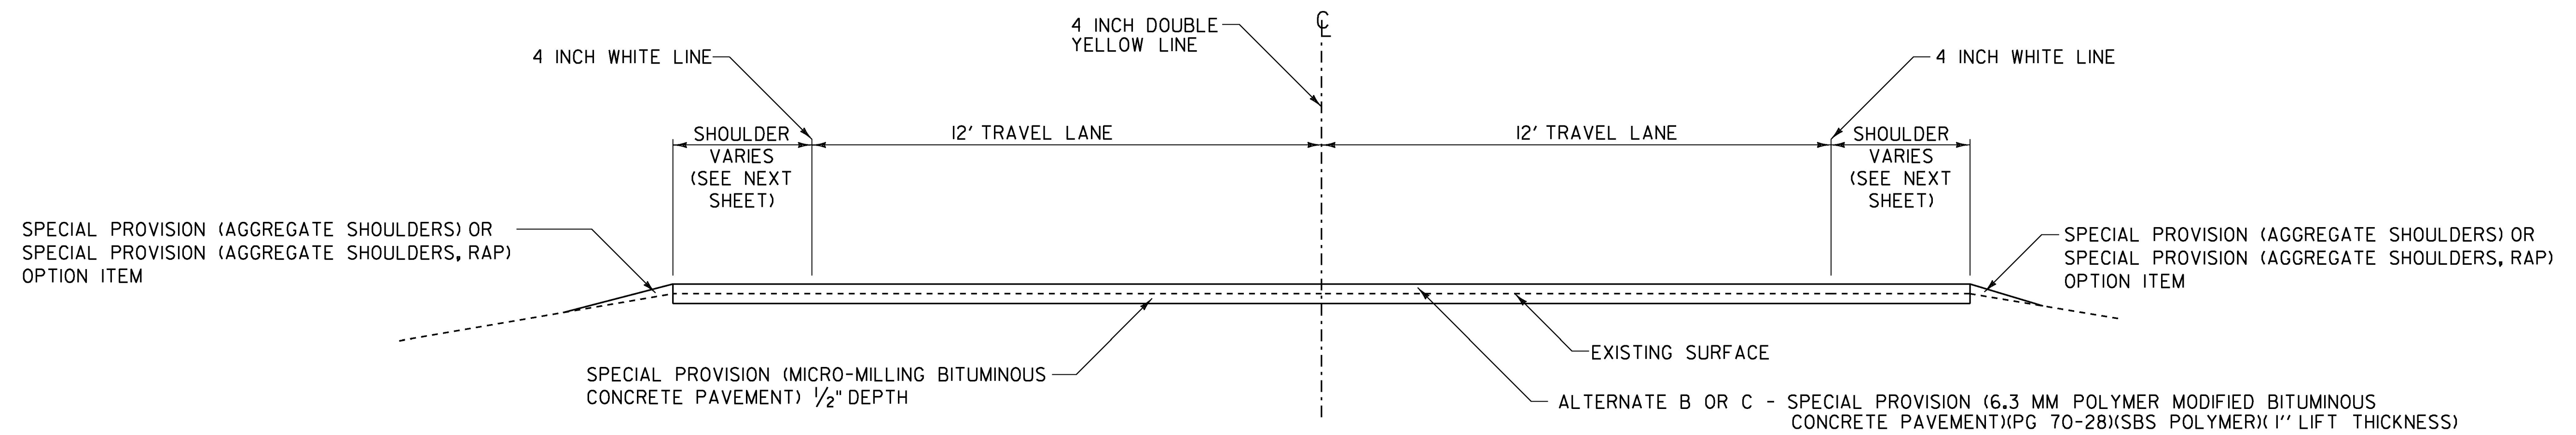

**US RTE. 7, VT. RTE. 22A, AND FERRISBURGH STATE HIGHWAY  
TYPICAL SECTION - ALTERNATE B OR C  
6.3 MM POLYMER MODIFIED BITUMINOUS CONCRETE PAVEMENT (SBS POLYMER)**

NOTES:

1. THE GYRATION SPECIFICATION FOR THE 6.3 MM POLYMER - MODIFIED BITUMINOUS CONCRETE PAVEMENT SHALL BE 80. PG BINDER SHALL BE 70-28.
2. SPECIAL PROVISION (6.3 MM POLYMER - MODIFIED BITUMINOUS CONCRETE PAVEMENT)(PG 70-28)(SBS POLYMER)(1" LIFT THICKNESS) PAVEMENT TOLERANCE = +/- 1/8 INCH (TOTAL THICKNESS).

**NOT TO SCALE**

PROJECT NAME:	MIDDLEBURY-FERRISBURGH
PROJECT NUMBER:	NH SURF(55)
FILE NAME: p15v015.dgn	PLOT DATE: 07-APR-2016
PROJECT LEADER: HARRINGTON	DRAWN BY: BULLOCK
DESIGNED BY: BULLOCK	CHECKED BY: HARRINGTON
TYPICAL SECTIONS SHEET 1	SHEET 4 OF 96