


REINFORCING STEEL				
BAR NO.	SIZE	LYN.	REQ'D.	LENGTH
A	5/8"	8'-0"	53	STRAIGHT
B	5/8"	27'-0"	16	STRAIGHT
C	5/8"	7'-0"	72	STRAIGHT
D	5/8"	29'-6"	72	STRAIGHT
E	1/2"	39'-0"	42	STRAIGHT
F	1/2"	19'-0"	42	LENGTH VARIES 16" TO 26" ACC. LYN. 19' BENT IN FIELD.
G	5/8"	5'-3"	43	SEE DETAIL
H	1/2"	22'-0"	6	STRAIGHT
J	1/2"	5'-0"	10	STRAIGHT

THIS STEEL SCHEDULE IS NOT GUARANTEED. THE ABOVE SCHEDULE IS FOR ONE PIER, TWO REQUIRED. DRIVE PILES TO 10 TON CAPACITY. LENGTH OF PILES 30 FT. FOR ESTIMATING PURPOSES ONLY.

REFERENCE SHEET
SHEET BR 124 OF BR 124

PIER DETAILS
NORWICH, VT.
F.A.P. 114-J

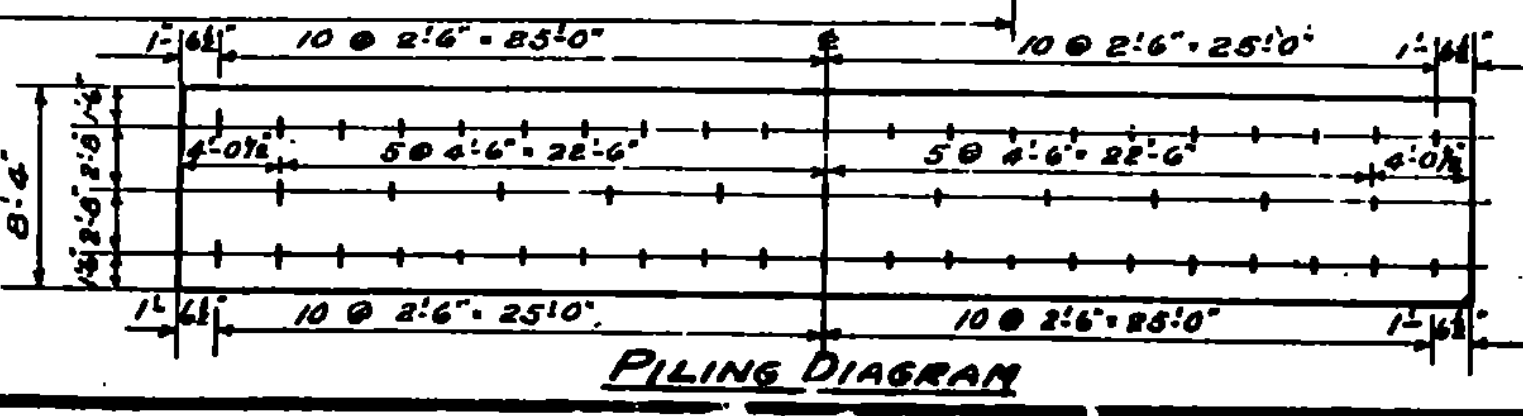

ESTIMATED QUANTITIES			
PIER #1		PIER #2	
STRUCTURE EXCAV.	177 Cu.Yds.	STRUCTURE EXCAV.	129 Cu.Yds.
CONCRETE CLASS 'A'	206 Cu.Yds.	CONCRETE CLASS 'A'	206 Cu.Yds.
REINFORCING STEEL	5618 LBS.	REINFORCING STEEL	5618 LBS.
TIMBER PILING	1390 Lm.Ft.	TIMBER PILING	1390 Lm.Ft.

Surveyed by		
Designed by	W.H.D.	3/23/57
Drawn by	W.H.D.	3/23/57
Traced by	D.H.P.	3/26/57
Checked by	G.C.	3/29/57
Series F.A.P.	No. 114-J	Filed
Sheet 6 of 9 Sheets		