


TYPICAL SECTIONS

RELOCATED T.H. #42

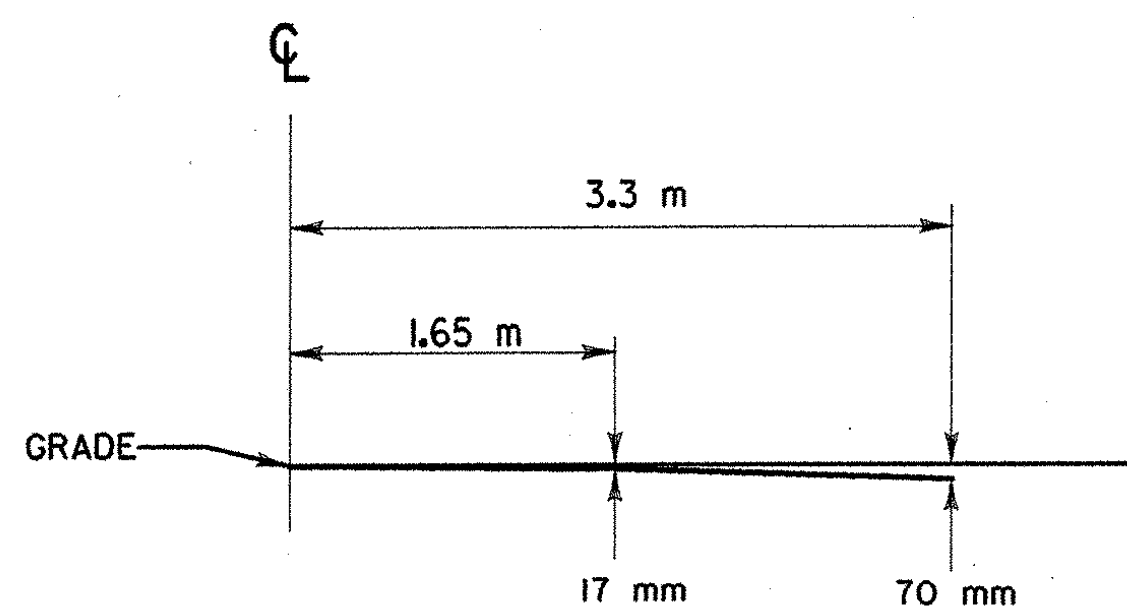


PARABOLIC DETAIL


TRAVEL LANES: 90 SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (40 TYPE III, OVER 50 TYPE II)
 305 SUBBASE OF CRUSHED GRAVEL (COARSE GRADED)
 0-305 SAND BORROW (AS DIRECTED BY THE ENGINEER)

SHOULDERS: 90 SUPERPAVE BITUMINOUS CONCRETE PAVEMENT


MATERIAL ITEM	THICKNESS TOLERANCE
PAVEMENT	± 5 mm
SUBBASE	± 30 mm
SAND BORROW	± 30 mm

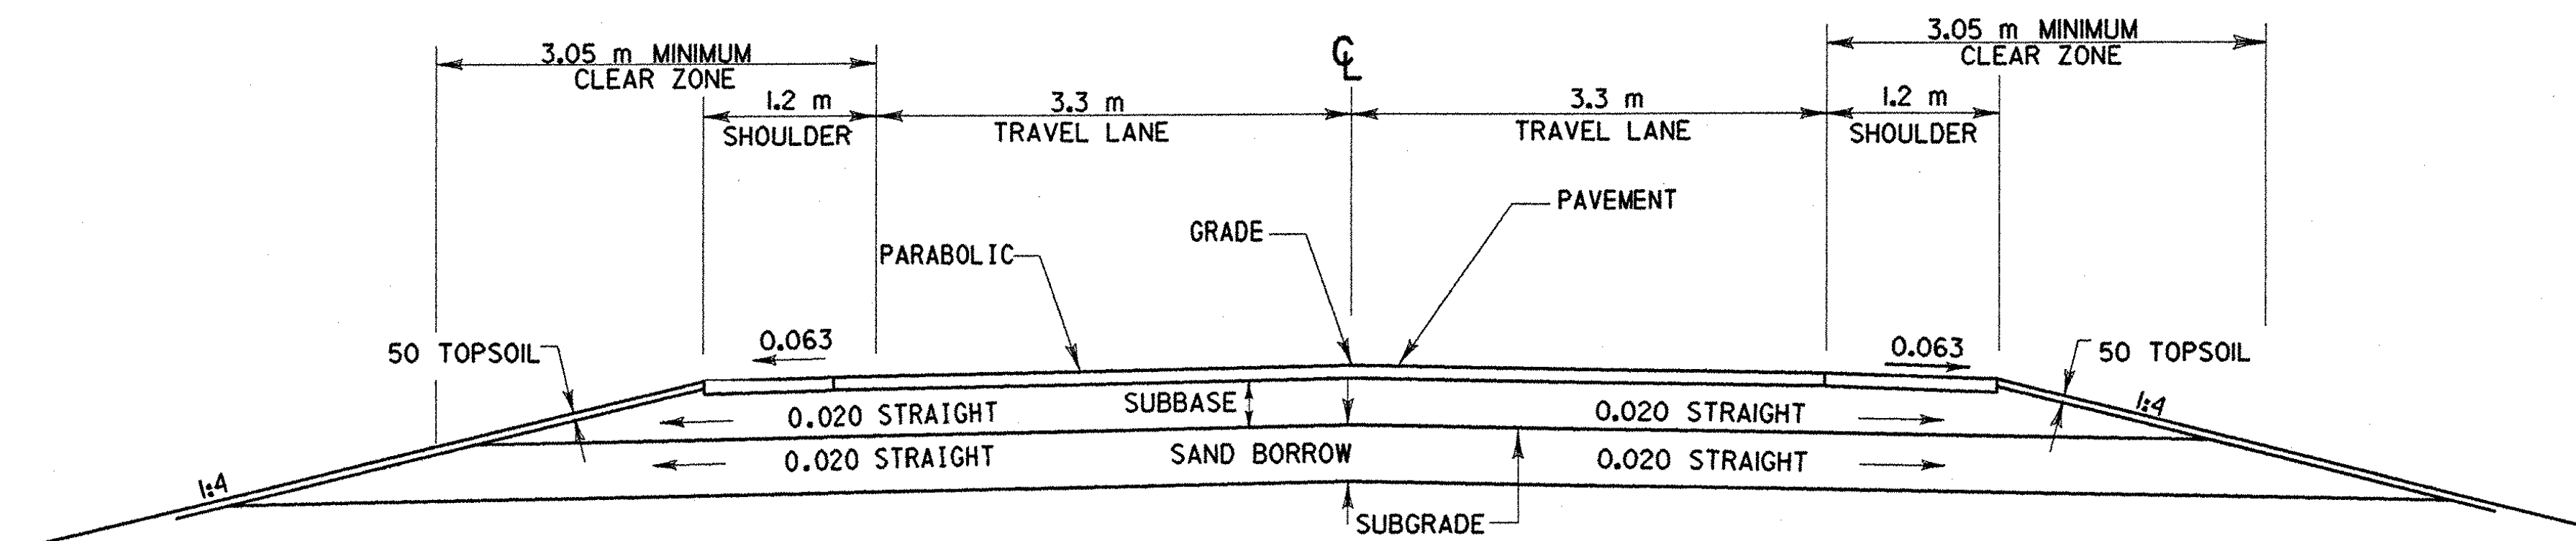


NORMAL SECTION

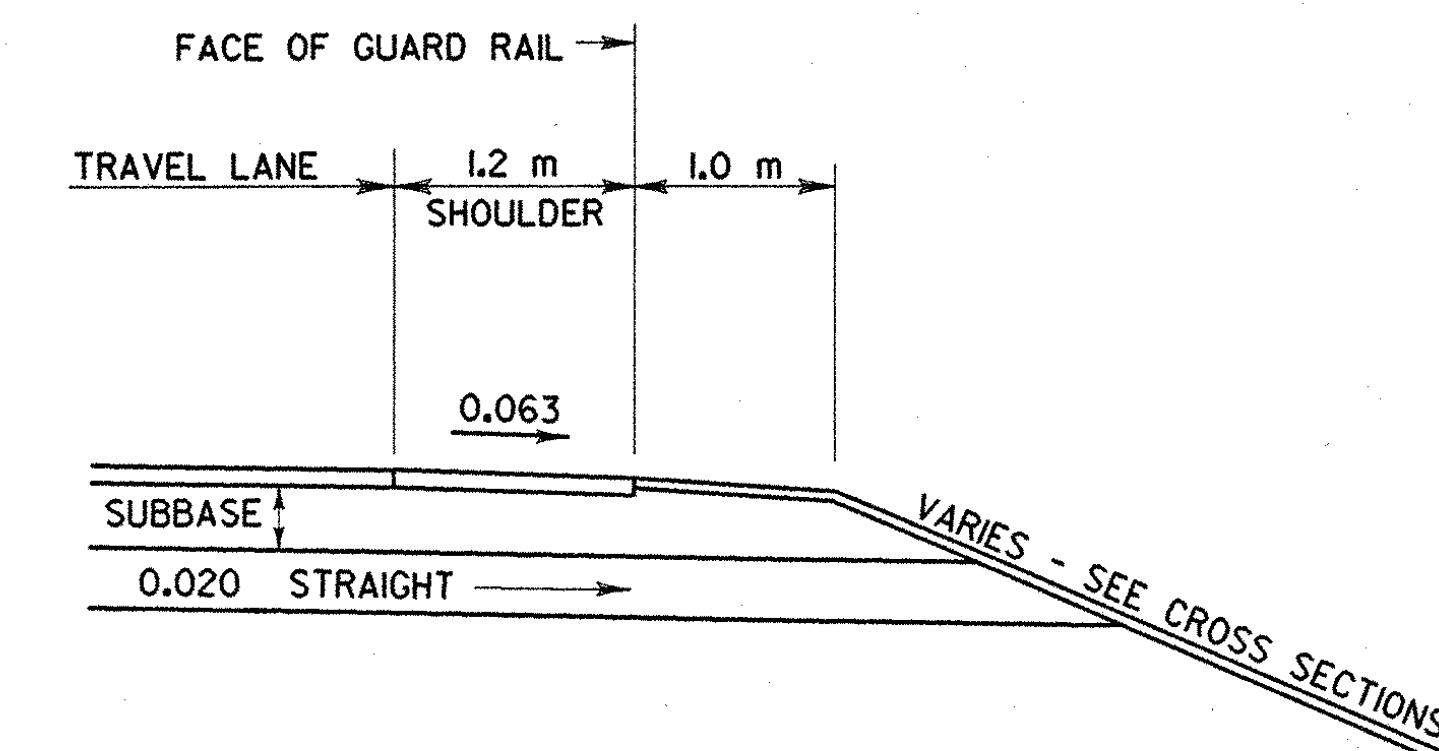


NORMAL SECTION WITH GUARD RAIL

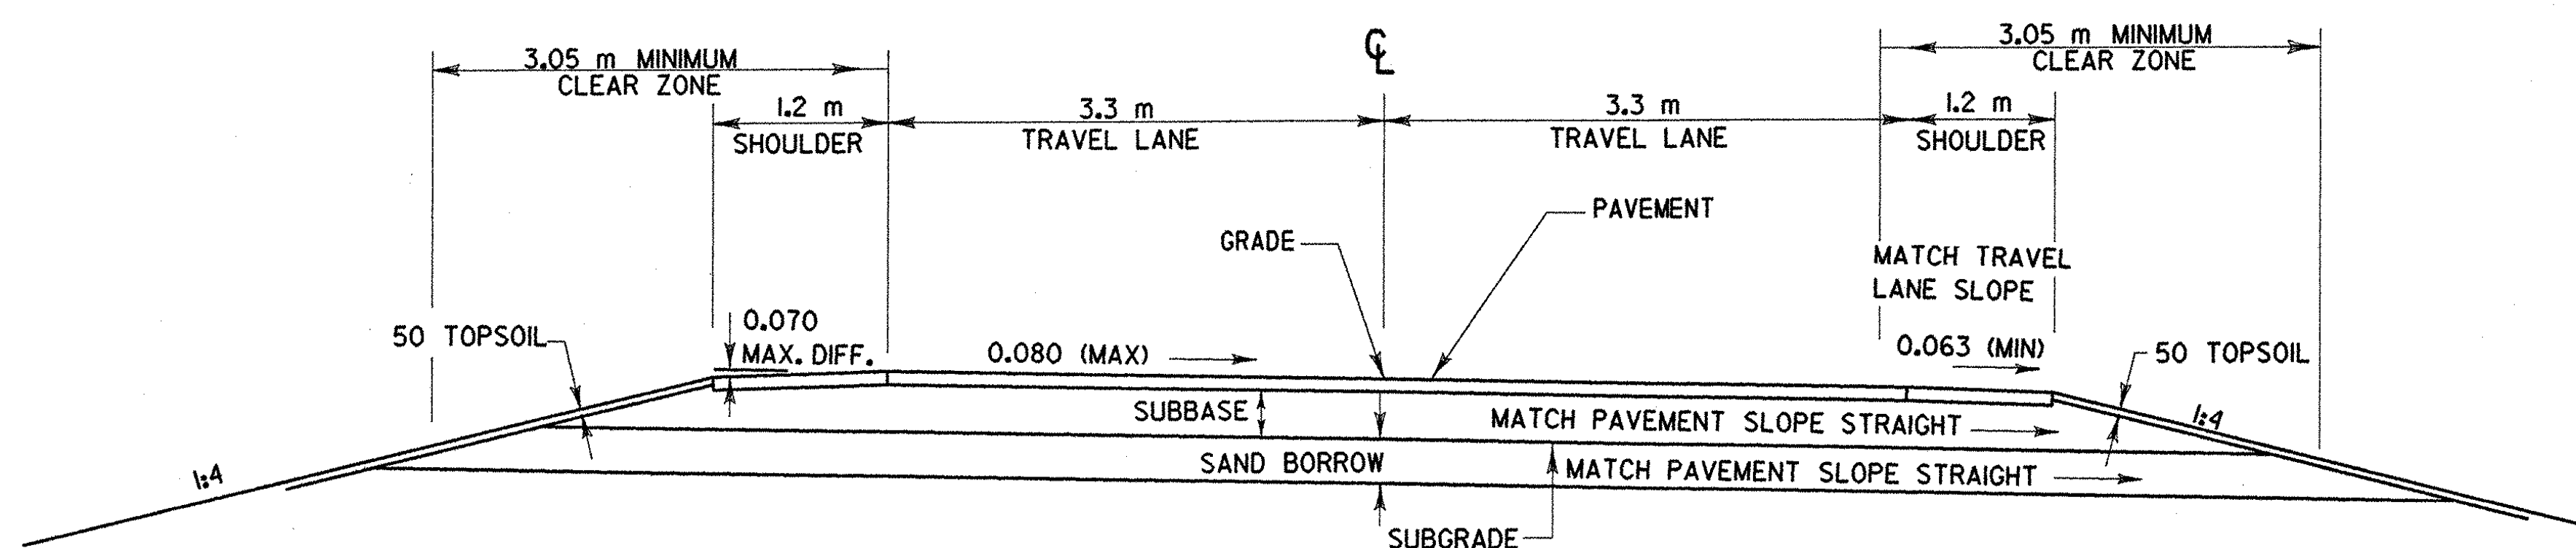

**BANKED SECTION
0.08 MAX.**

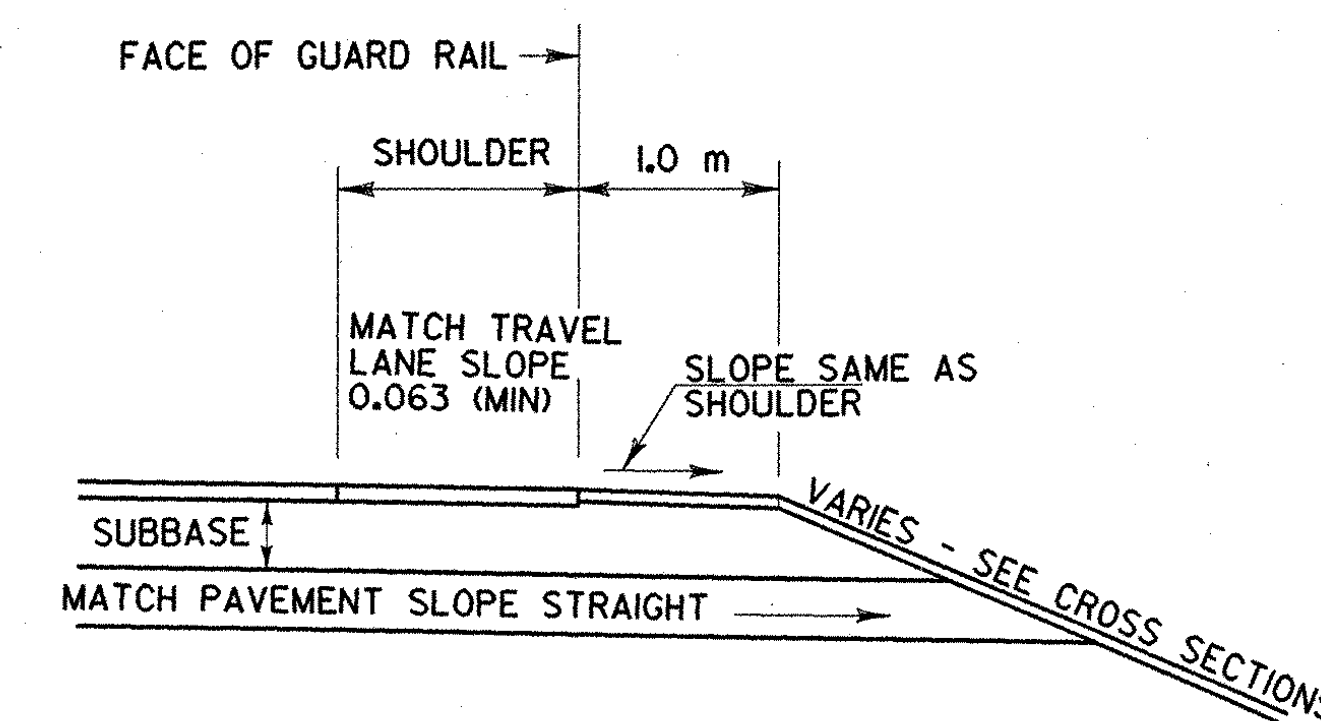

**DETAIL OF GUARD RAIL ON LOW SIDE
OF BANKED SECTION**

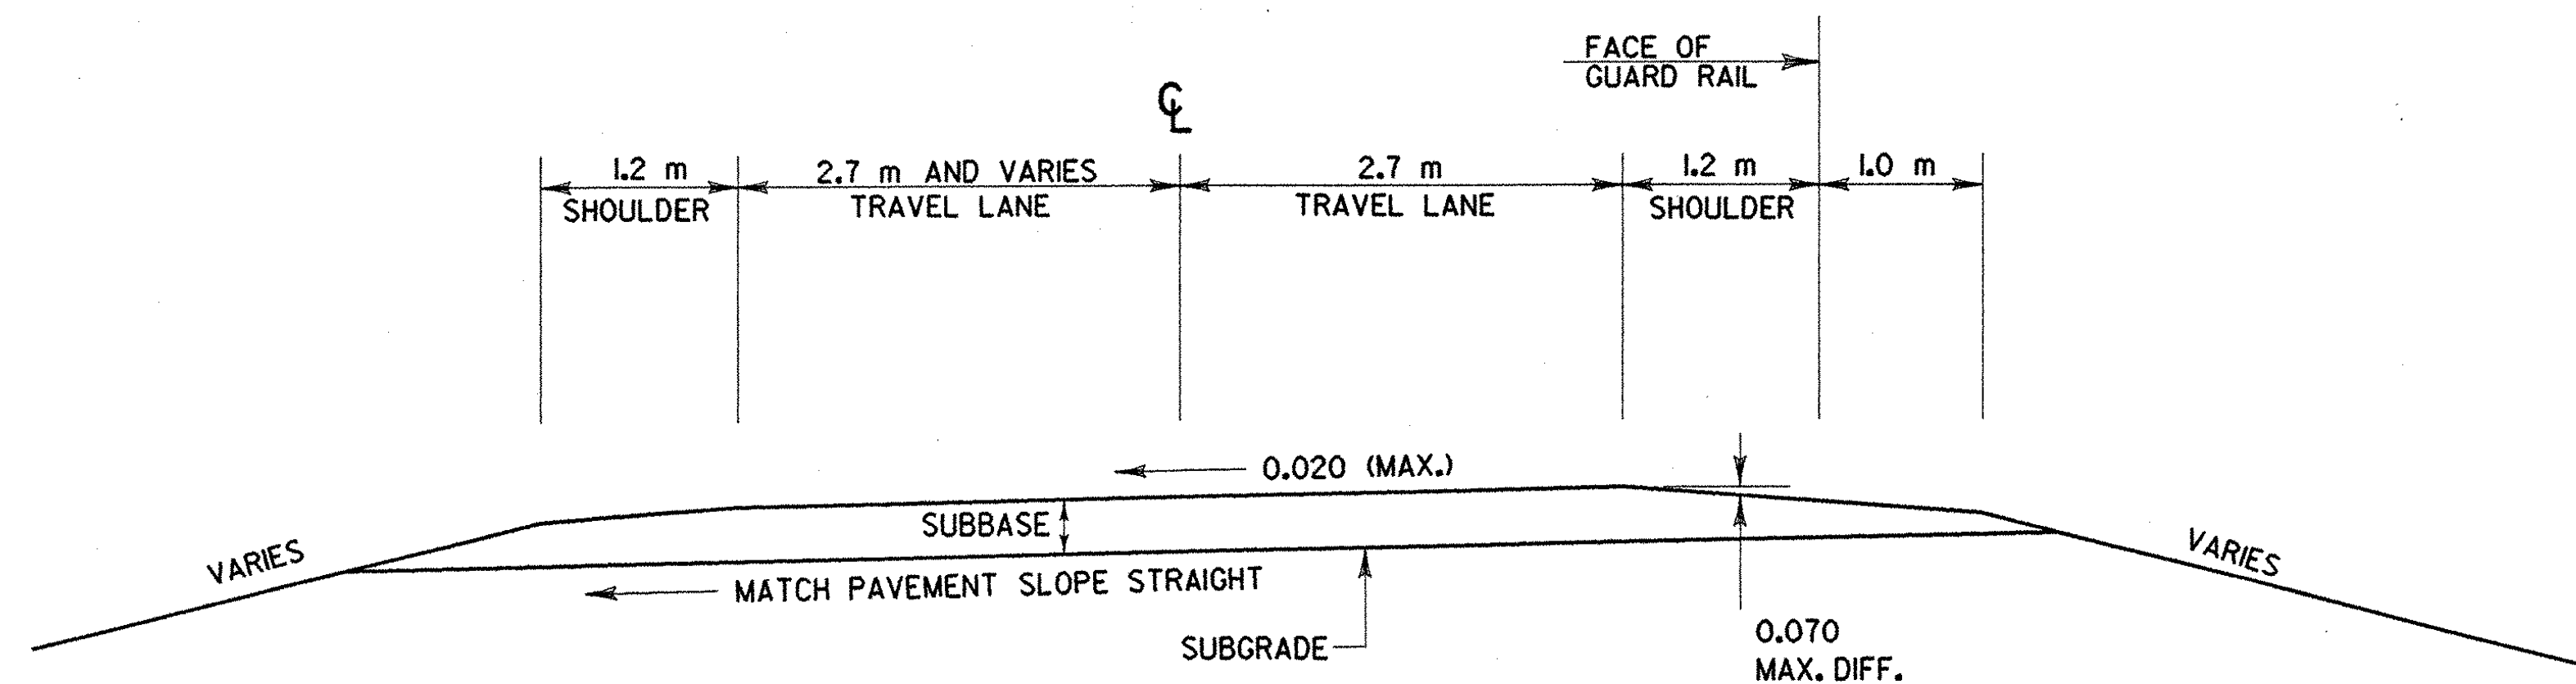

**STA. 19+867 TO STA. 19+910
0.02 MAX.**

ALL DETAILS "N.T.S." (NOT TO SCALE)
 ALL DIMENSIONS IN MILLIMETERS EXCEPT AS INDICATED

DATUM	
VERTICAL	NCVD 1929
HORIZONTAL	N/A

TYPICAL SECTIONS	PROJECT: BERKSHIRE	PROJECT NO.: BRF-RS 0283(7)
	DESIGN FILE NAME: 02837FRM.DGN	PLOT DATE: 18-FEB-2000
	IPARM FILE NAME: 02837TY3.I	SURVEY DATE:
	SURVEYED BY:	DRAWN BY: C. MABY
	SQUAD LEADER:	SHEET: 10 OF 140