

MATERIAL ITEM	THICKNESS TOLERANCE
PAVEMENT(TOTAL DEPTH ALL LAYERS)	± 5
SUBBASE	± 30
SAND BORROW	± 30

## MAINLINE TYPICAL SECTIONS

- 40 BITUMINOUS CONCRETE PAVEMENT (TYPE III) (PG 58-34)
- 50 BITUMINOUS CONCRETE PAVEMENT (TYPE II) (PG 58-34)
- 65 BITUMINOUS CONCRETE PAVEMENT (TYPE I) (PG 58-34)
- 460 SUBBASE OF DENSE GRADED CRUSHED STONE
- 600 SAND BORROW

### SHOULDERS:

- 40 BITUMINOUS CONCRETE PAVEMENT (TYPE III) (PG 58-34)
- 50 BITUMINOUS CONCRETE PAVEMENT (TYPE II) (PG 58-34)

NOTE: EMULSIFIED ASPHALT SHALL BE APPLIED BETWEEN ALL COURSES OF PAVEMENT AND ON COLD PLANED SURFACES AT A RATE OF 0.12 L/M<sup>2</sup> OR AS DIRECTED BY THE RESIDENT ENGINEER.

### SEEDING FORMULA RURAL AREAS CONSERVATION MIX

% MASS	kg/ha	NAME	PUR %	GERM %
37.14	26	CREeping RED FESCUE	98	85
37.14	26	TALL FESCUE	95	90
5.71	4	RED TOP	95	90
14.30	10	BIRDSFOOT TREFOIL	98	85
5.71	4	ANNUAL RYE GRASS	95	85
100.00	70			

SEED MIXTURE: SHALL NOT HAVE A WEED CONTENT EXCEEDING 0.40% BY MASS AND SHALL BE FREE OF ALL NOXIOUS WEED SEED.

SEED: TO BE APPLIED PER SEEDING FORMULAS OR AS DIRECTED BY THE ENGINEER.



FERTILIZER: FORMULA 10-20-10 TO BE USED WITH SEED, APPLIED AT THE RATE OF 560 kg/ha. (HYDRO SEEDERS MAY USE 19-19-19 FORMULA)

AGRICULTURAL LIMESTONE: TO BE APPLIED AT THE RATE OF 4500 kg/ha OR AS DIRECTED BY THE ENGINEER.

HAY MULCH: TO BE PLACED ON EARTH SLOPES AT THE RATE OF 4500 kg/ha OR AS DIRECTED BY THE ENGINEER.

TOPSOIL: TO BE USED WITH SEED AS INDICATED ON THE PLANS, OR AS DIRECTED BY THE ENGINEER.

SLOPE ROUNDING: ALL CUT SLOPES TO BE ROUNDED IN ACCORDANCE WITH STANDARD SHEET B-5.

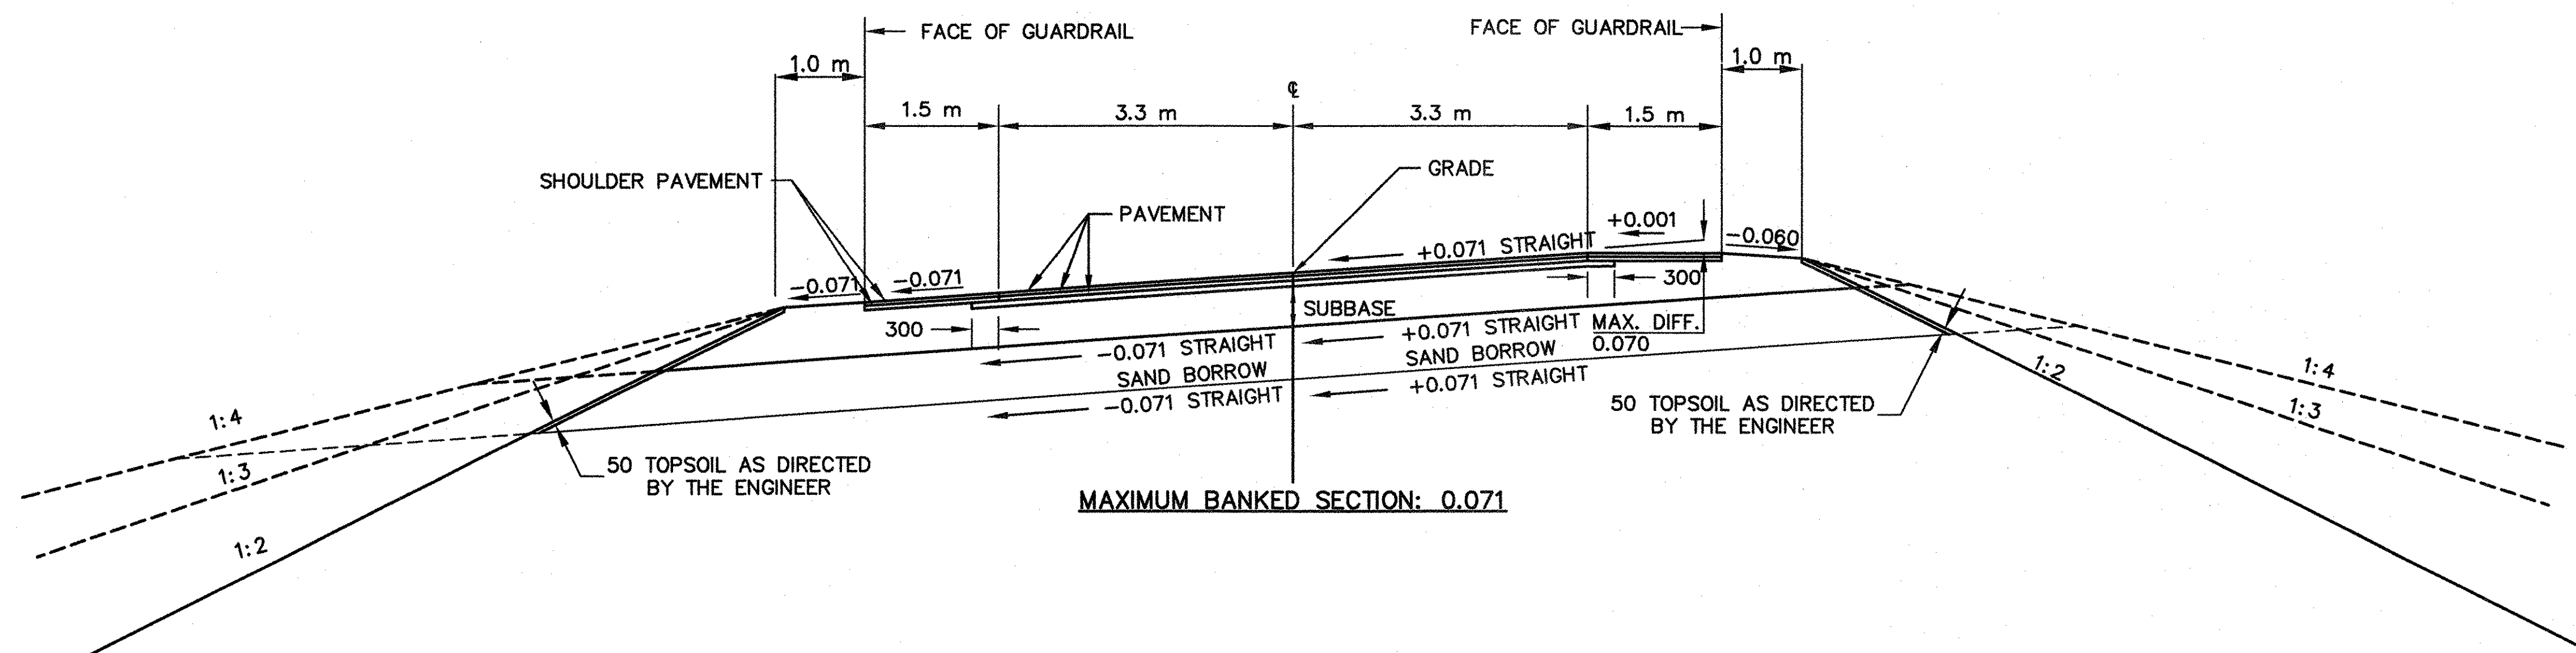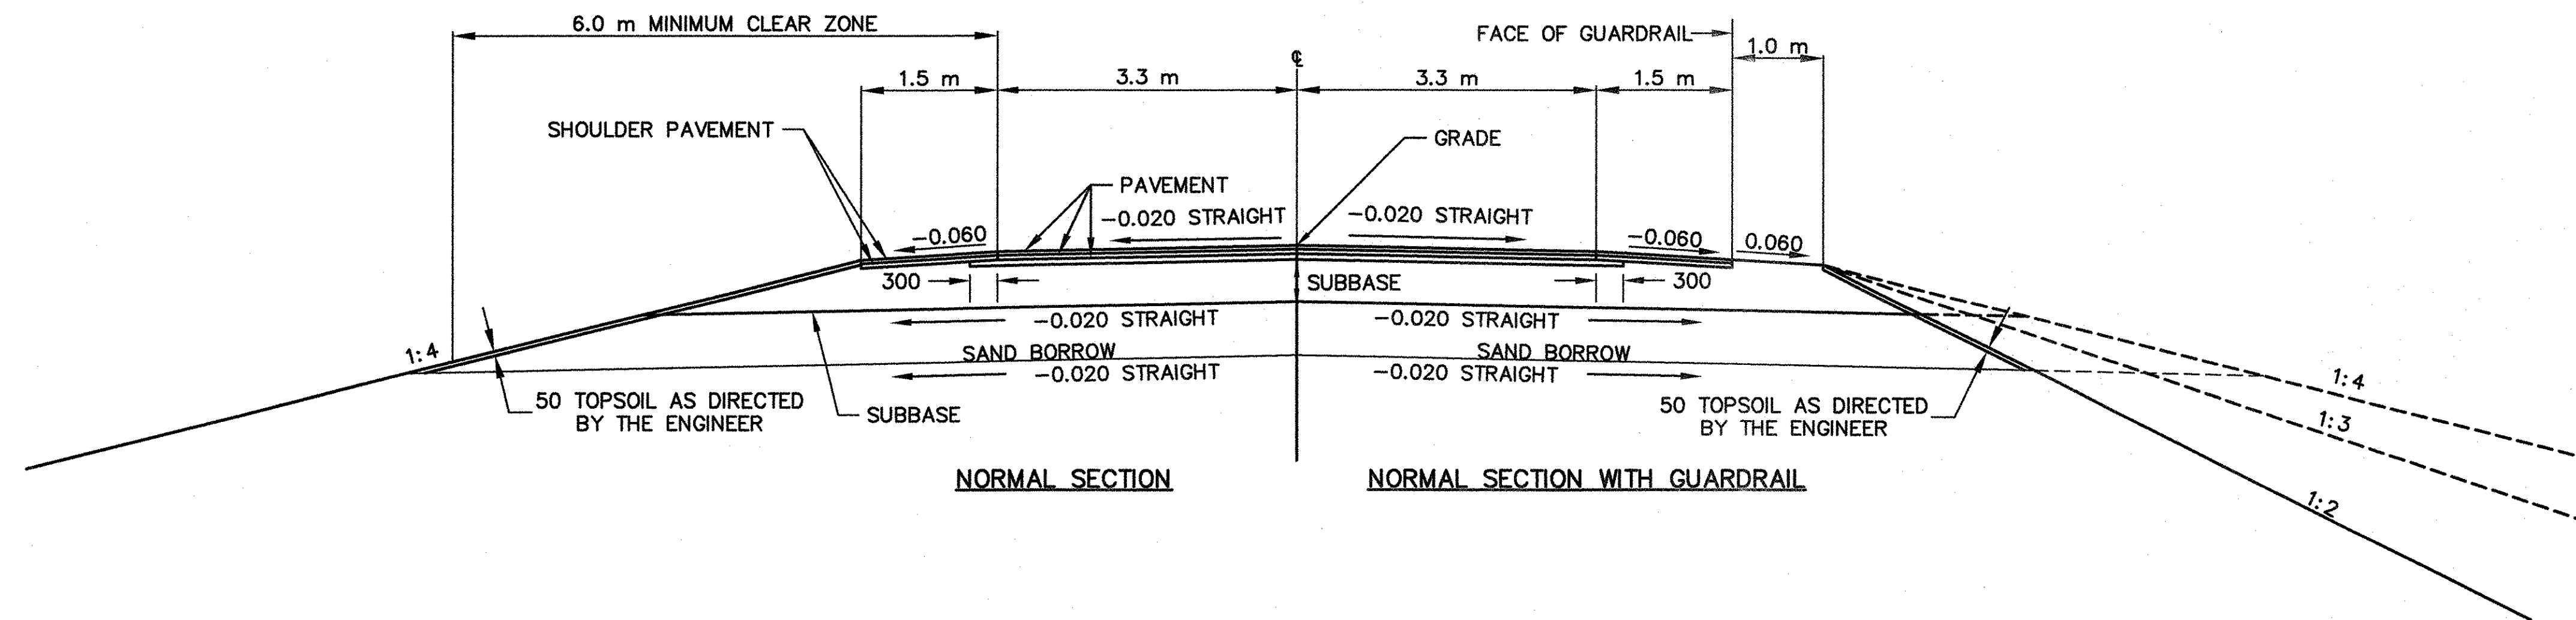

### ALL DIMENSIONS IN MILLIMETERS EXCEPT AS INDICATED

SURVEYED BY	CLD	DATE	10/94
DRAWN BY	SMC	DATE	11/96
SQUAD LEADER	JAW		
DESIGN FILE NO.	90284		
IPARM FILE		DATE PLOTTED	
PROJ. NAME	JAMAICA		
PROJ. NO.	BRF 013-1(B)		
SHEET	5	OF	116 SHEETS