

MATERIAL ITEM	THICKNESS TOLERANCE
BIT. CONC. PAVEMENT TYPE IV (PG 58-34)	± 1/4"
BASE COURSE, BIT. CONC. PAVEMENT TYPE I (PG 58-34)	± 1/2"
SUBBASE OF DENSE GRADED CRUSHED STONE	± 1"
SAND BORROW	± 1"


1 1/2" BITUMINOUS CONCRETE PAVEMENT, TYPE IV (PG 58-34)  
 2" BITUMINOUS CONCRETE PAVEMENT, TYPE I (PG 58-34)  
 2" BITUMINOUS CONCRETE PAVEMENT, TYPE I (PG 58-34)  
 18" SUBBASE OF DENSE GRADED CRUSHED STONE  
 18" SAND BORROW

**SEEDING FORMULA  
 URBAN AREAS**


% WT.	LBS./A.	NAME	PUR %	GERM %
42.5	34.0	CREeping RED FESCUE	98	85
10.0	8.0	PERENNIAL RYE GRASS	95	90
42.5	34.0	KENTUCKY BLUE GRASS	85	85
5.0	4.0	ANNUAL RYE GRASS	95	85
100.00	80.0			

**GENERAL NOTES**

SEED MIXTURE: SHALL NOT HAVE A WEED CONTENT EXCEEDING 0.40% BY WEIGHT AND SHALL BE FREE OF ALL NOXIOUS SEED.  
 SEED: TO BE APPLIED PER SEEDING FORMULA OR AS DIRECTED BY THE ENGINEER.  
 FERTILIZER: FORMULA 10-20-10, TO BE USED WITH SEED, APPLIED AT THE RATE OF 500 LBS./ACRE. (HYDRO SEEDERS MAY USE 19-19-19 FORMULA).  
 AGRICULTURAL LIMESTONE: TO BE APPLIED AT THE RATE OF 2 TONS/ACRE, OR AS DIRECTED BY THE ENGINEER.  
 HAY MULCH: TO BE PLACED ON EARTH SLOPES AT THE RATE OF 2 TONS/ACRE, OR AS DIRECTED BY THE ENGINEER.  
 TOPSOIL: TO BE USED WITH SEED AS INDICATED ON THE PLANS, OR AS DIRECTED BY THE ENGINEER. TOPSOIL THICKNESS IS 6".  
 SLOPE ROUNDING: ALL CUT SLOPES TO BE ROUNDED IN ACCORDANCE WITH STANDARD SHEET B - 5.

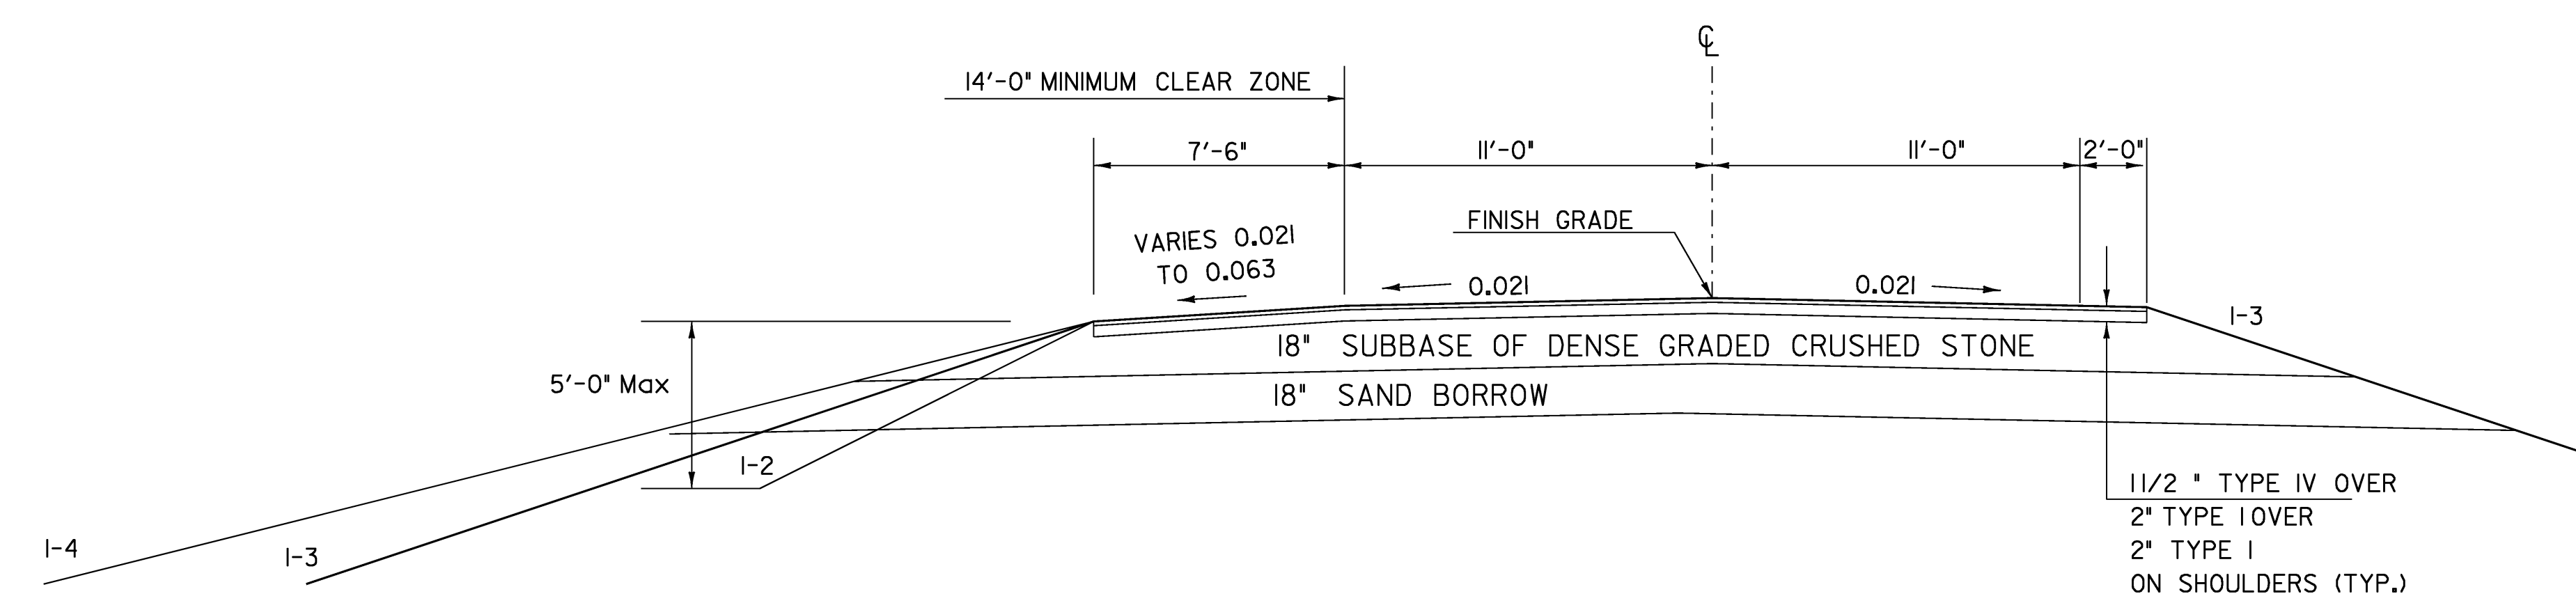

TYPICAL SECTION  
 NTS  
 STA. 218+25 TO 218+60

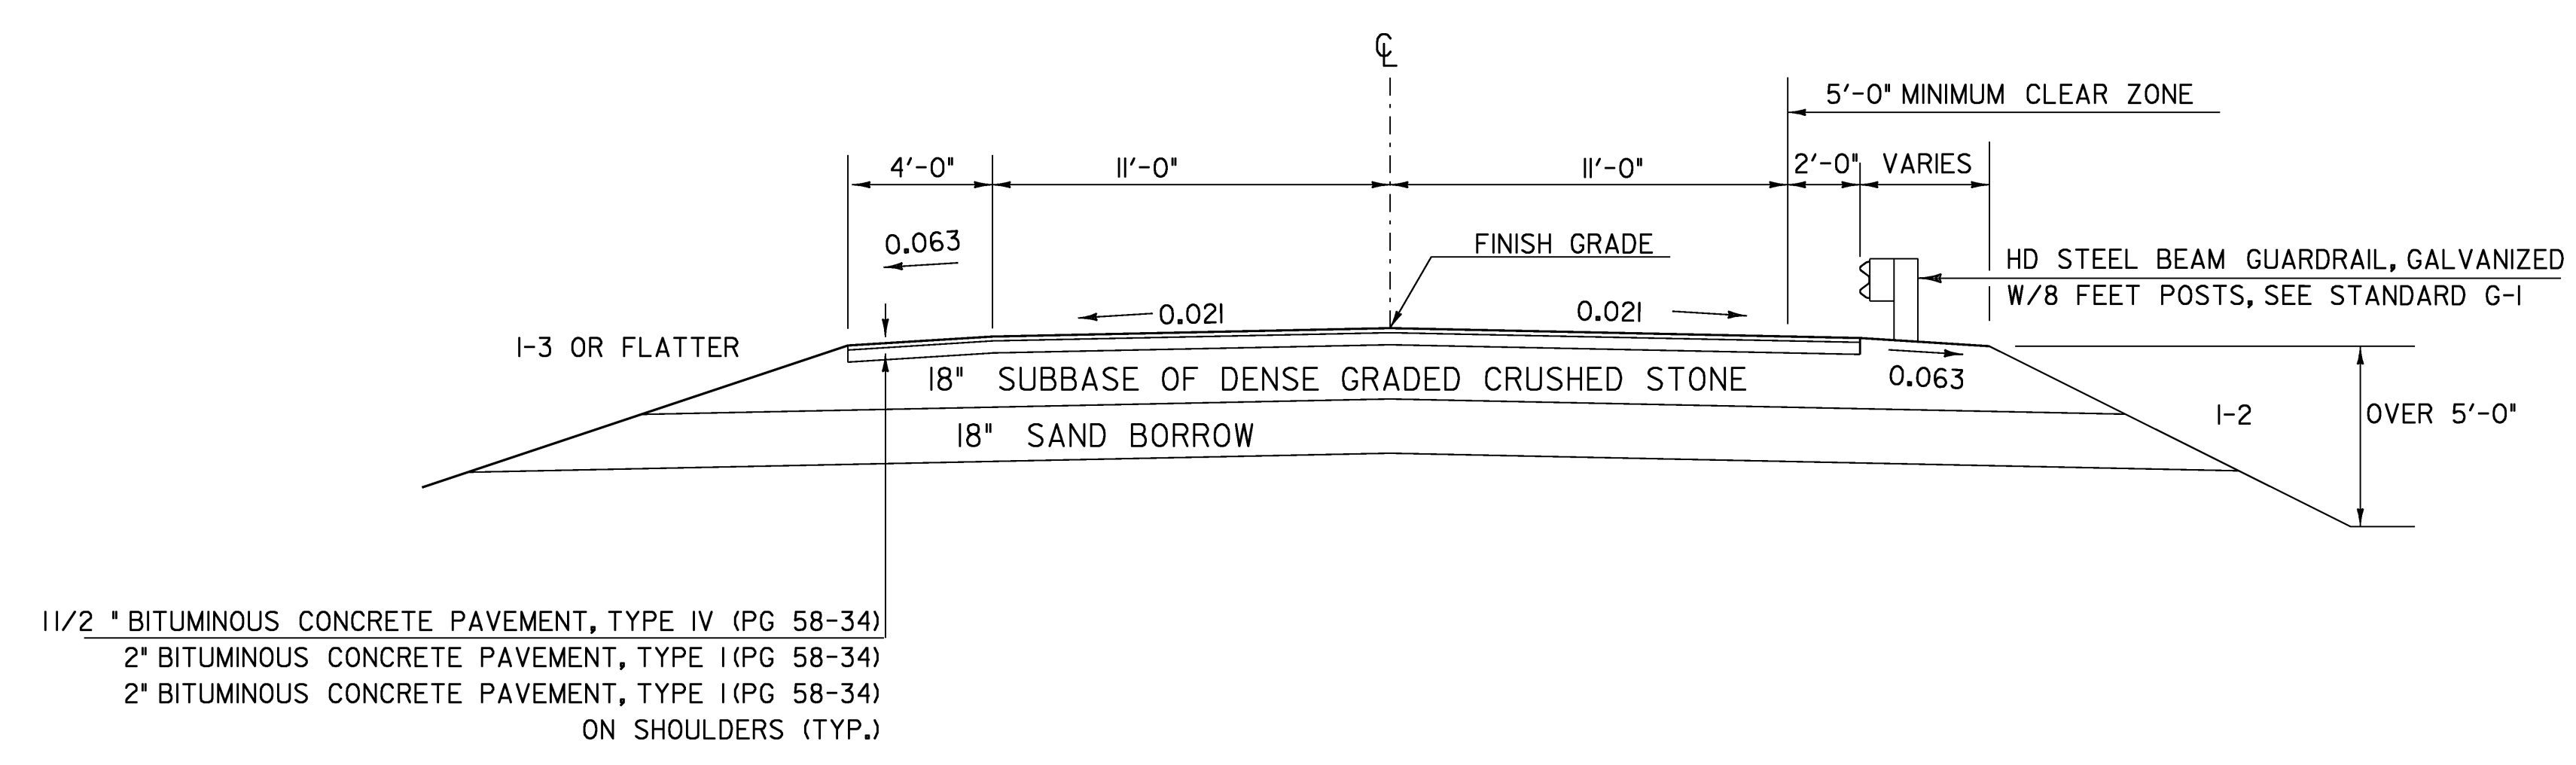

TYPICAL SECTION  
 NTS  
 STA. 219+60 TO 220+25

ROADWAY TYPICAL SECTION SHEET 2

PROJECT NAME: WILLIAMSTOWN	PLOT DATE: 07-APR-2008
PROJECT NUMBER: BRS 0204 (4)	DRAWN BY: STANLEY
FILE NAME: /structures/se11typ.dgn	CHECKED BY: STANLEY
PROJECT LEADER: EVANS-MONGEON	SHEET 4 OF 108
DESIGNED BY: EVANS-MONGEON	
s83e11typ3.1	