


APPROACH SLAB PLAN
SCALE: 1/4" = 1'-0"

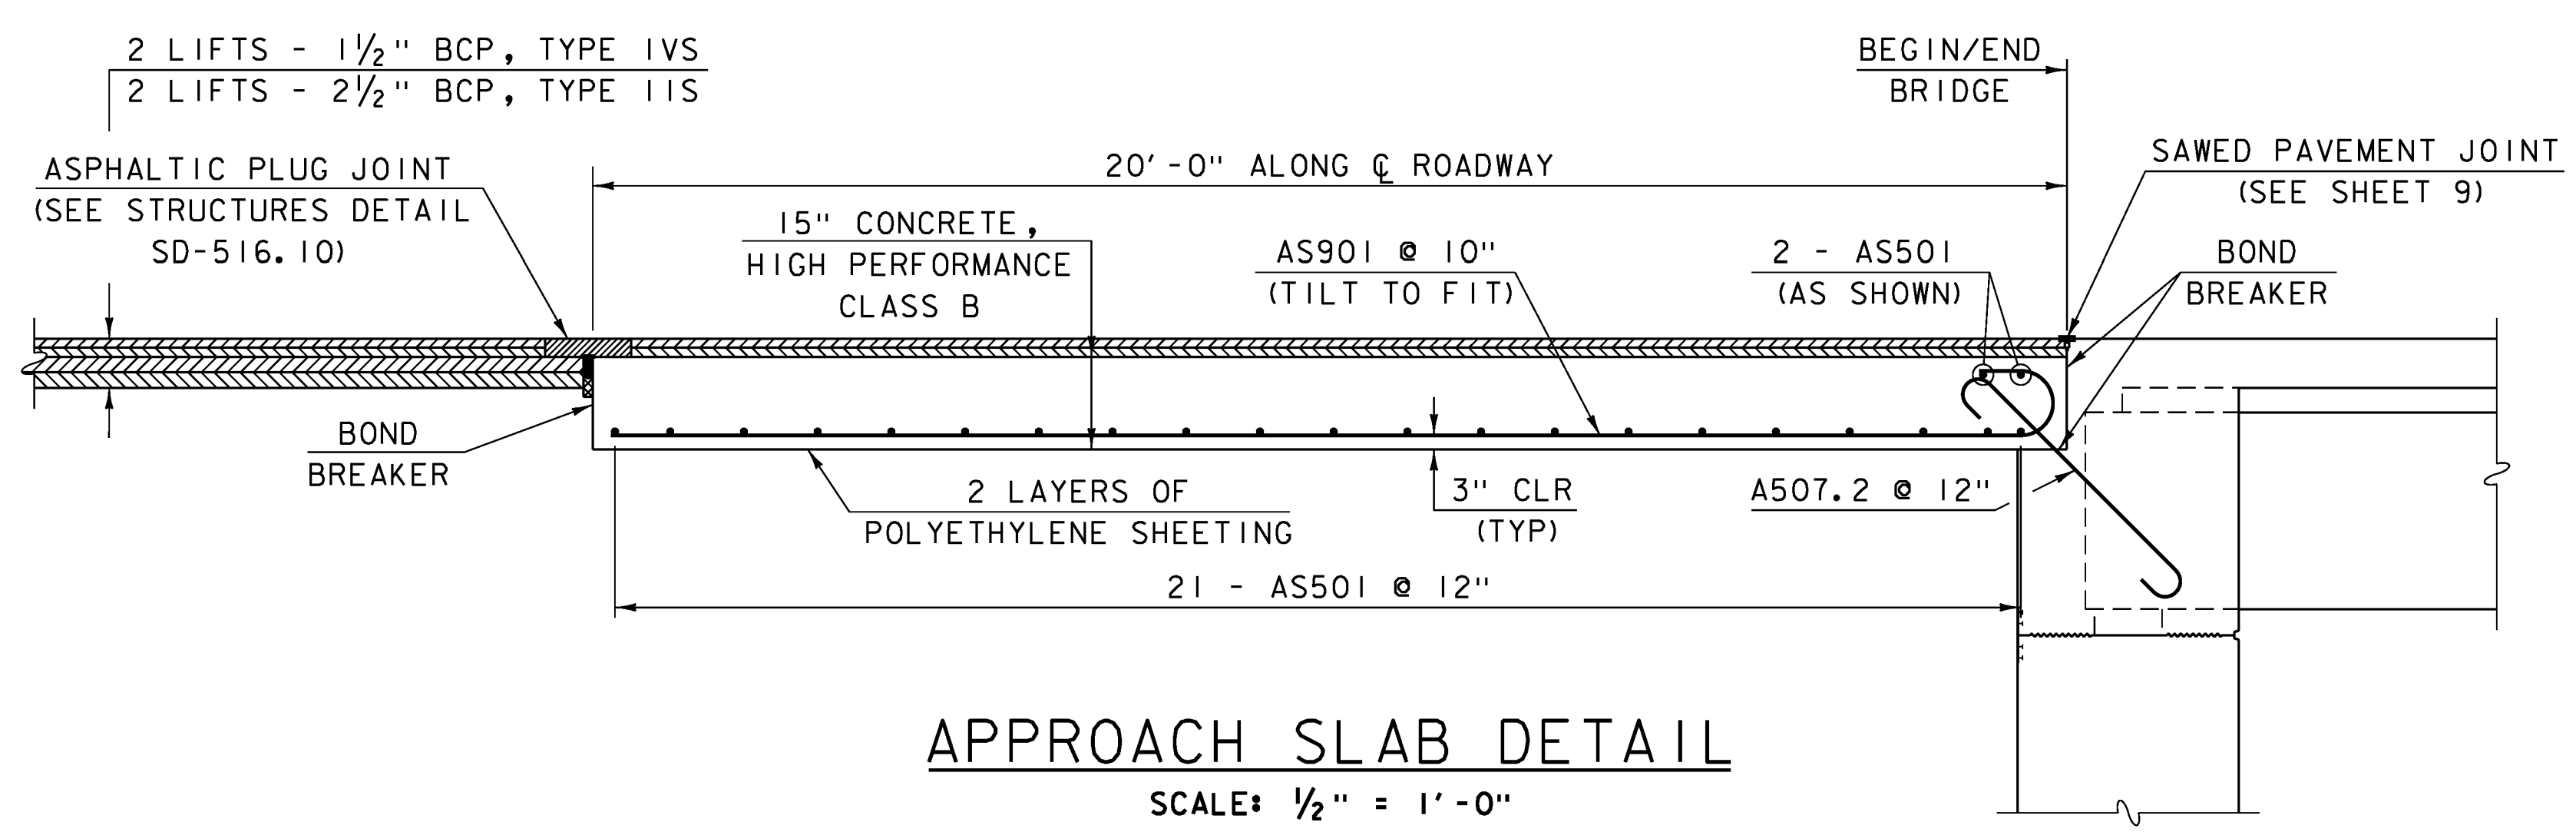

NOTES:

1. COMPACT THE SUBBASE IN THE AREA UNDER THE APPROACH SLAB TO A SMOOTH SURFACE.
2. MATERIAL FOR POLYETHYLENE SHEETING SHALL MEET THE REQUIREMENTS OF SUBSECTION 725.01 (c) OF THE STANDARD SPECIFICATIONS. THE SHEETING THICKNESS SHALL BE 12 MIL. PLACE THE SHEETING ON TOP OF THE FINISHED SUBBASE FOR THE FULL LENGTH AND WIDTH OF THE APPROACH SLAB, EXCEPT IN THE BRACKET AREA AT THE ABUTMENT. LAP SHEETING AT LEAST 2'-0". PAYMENT FOR SHEETING SHALL BE INCLUDED IN THE UNIT PRICE BID FOR ITEM 501.34 "CONCRETE, HIGH PERFORMANCE CLASS B".
3. PLACE HOOKED ENDS OF BOTTOM STEEL AT ABUTMENT END OF SLAB.

PROJECT NAME: STOWE	PLOT DATE: 17-JUN-2013
PROJECT NUMBER: BRF 029-1(17)	DRAWN BY: G. ROY
FILE NAME: s85e037sup.dgn	CHECKED BY: H. I. SALLS
PROJECT LEADER: C. CARLSON	SHEET 36 OF 70
DESIGNED BY: H. I. SALLS	APPROACH SLAB DETAILS