




DRIVE WITH
SIDEWALK SET BACK FROM CURB

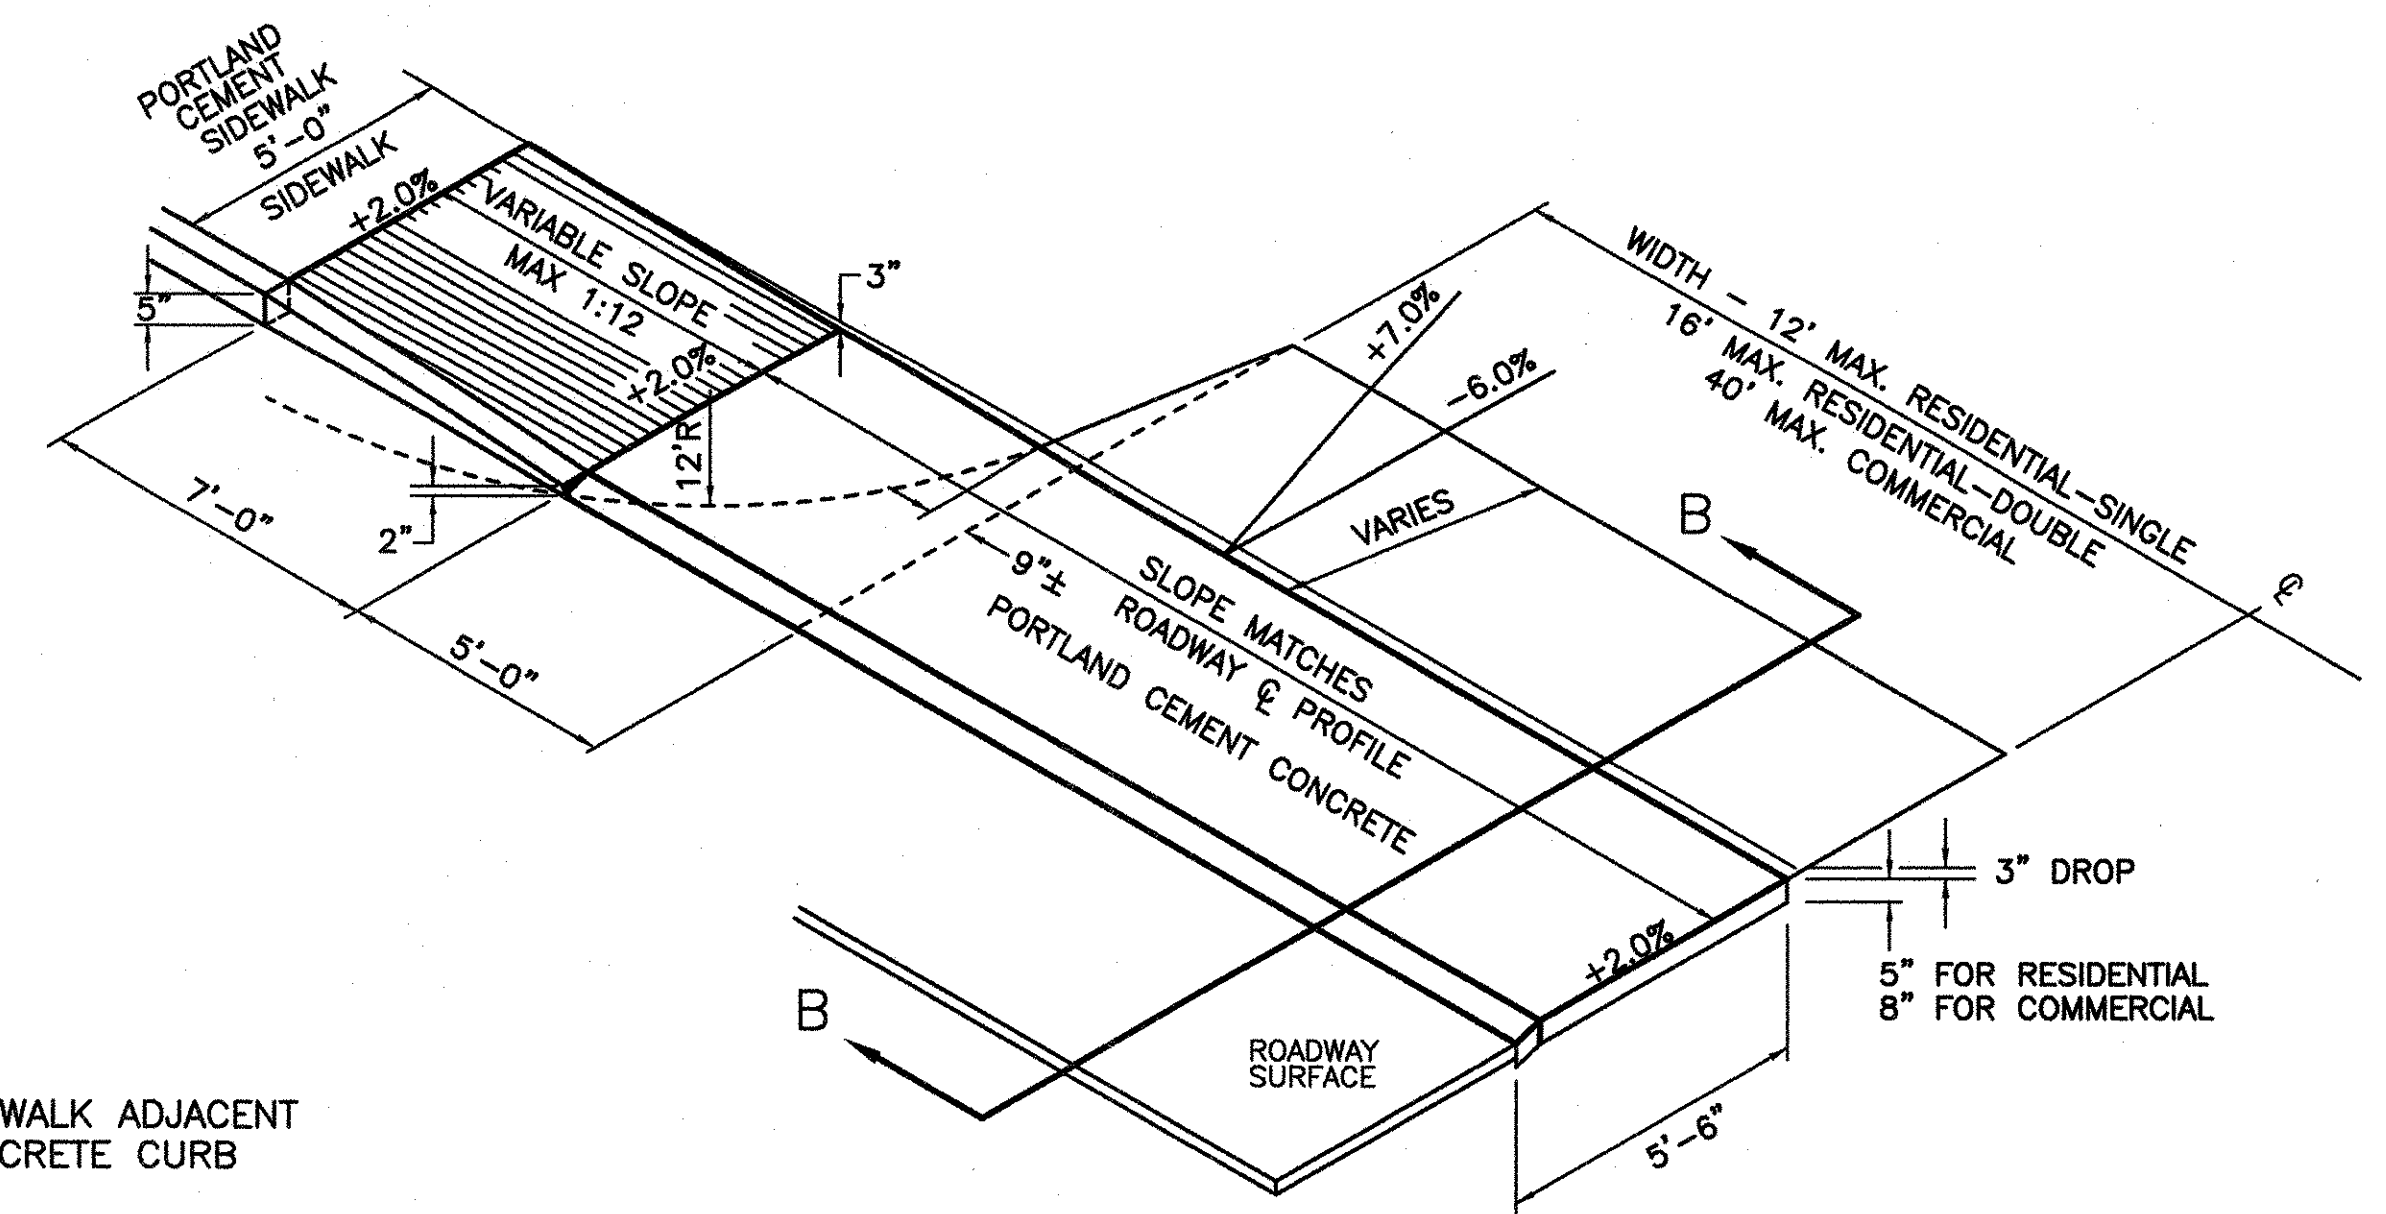


DRIVE WITH SIDEWALK ADJACENT
TO CEMENT CONCRETE CURB

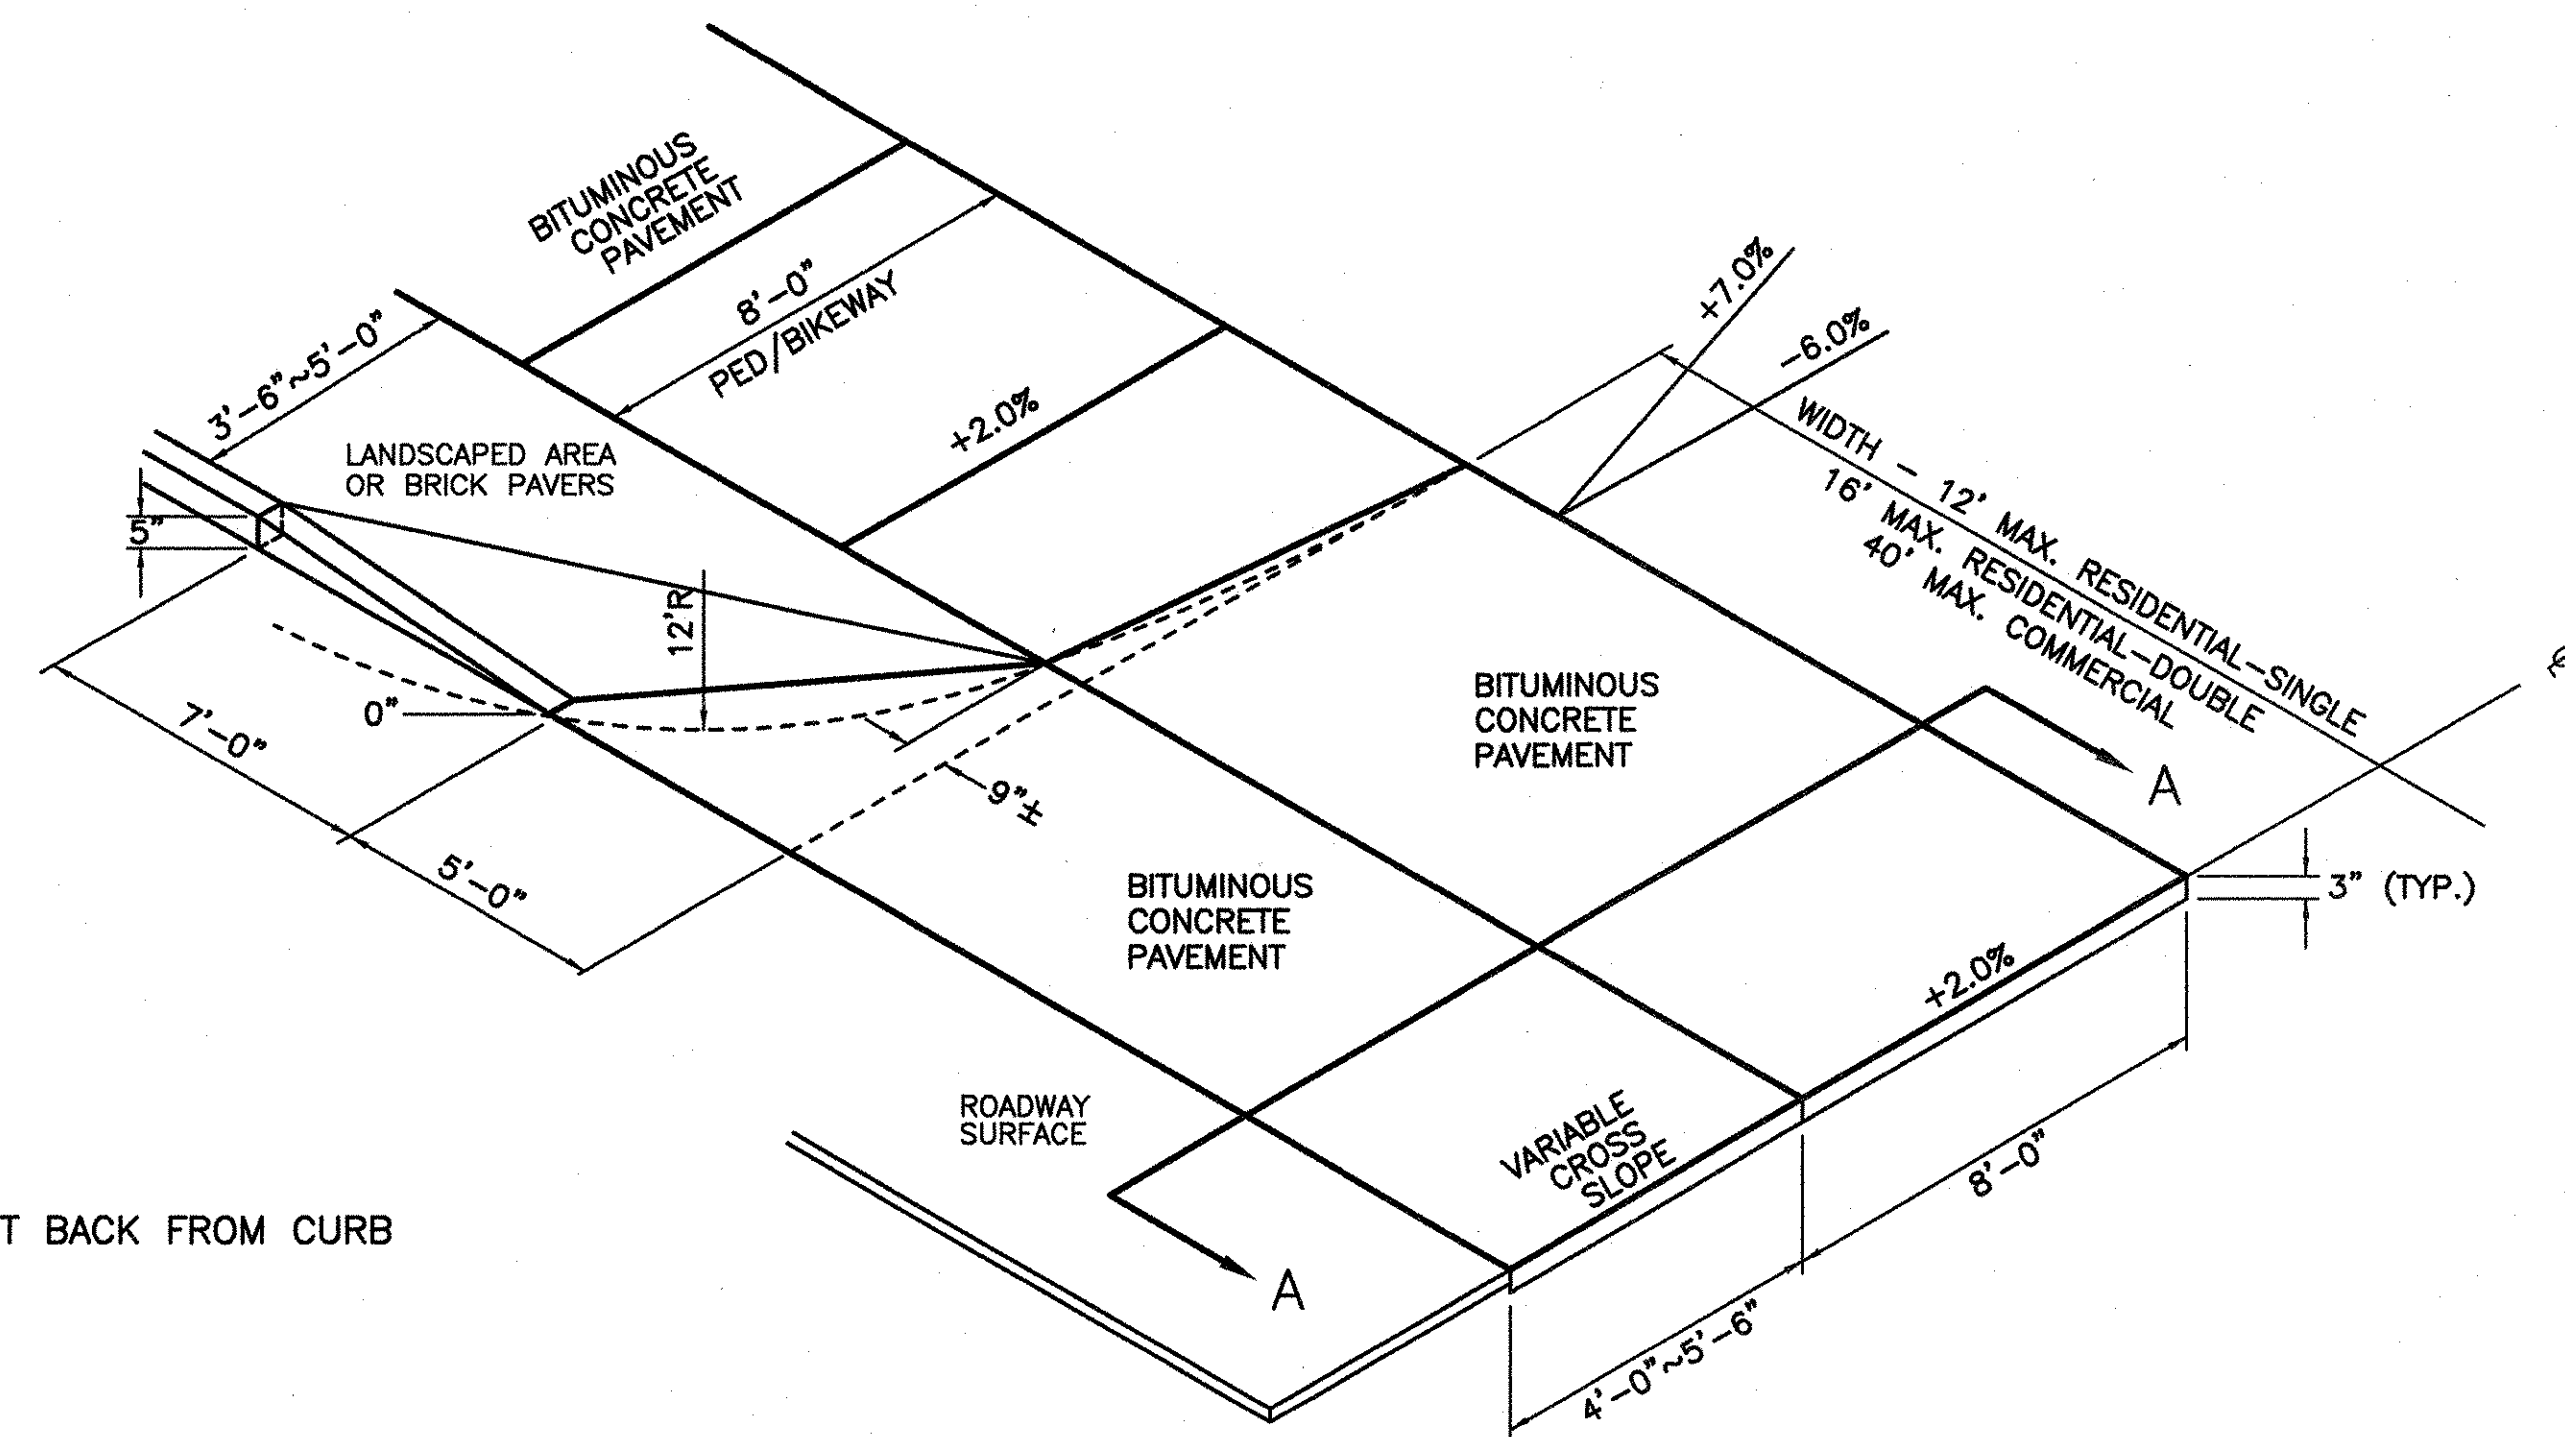

DRIVE WITH
PED/BIKEWAY SET BACK FROM CURB

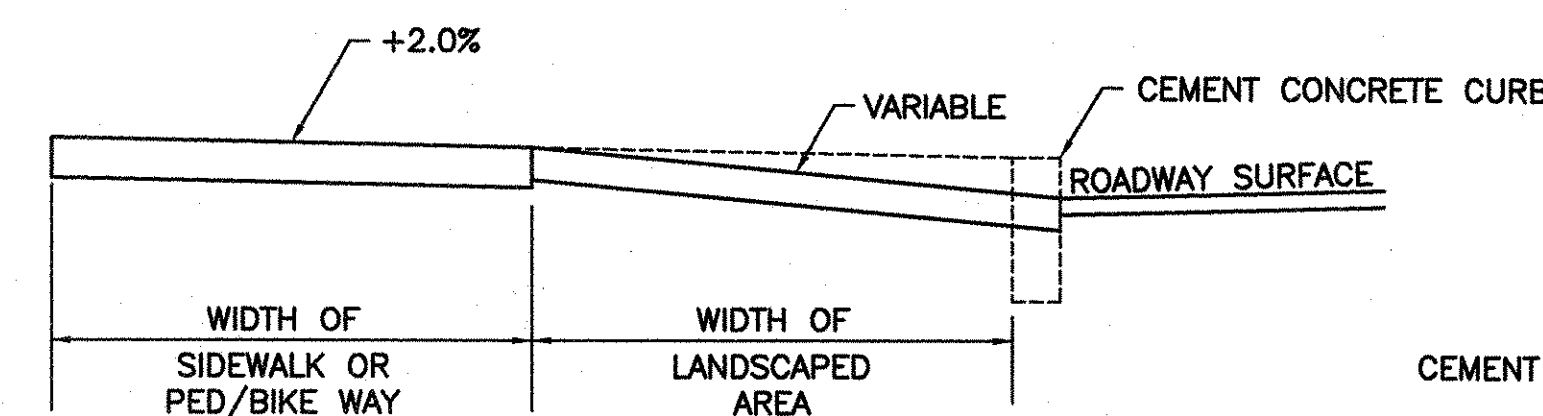

SECTION A-A

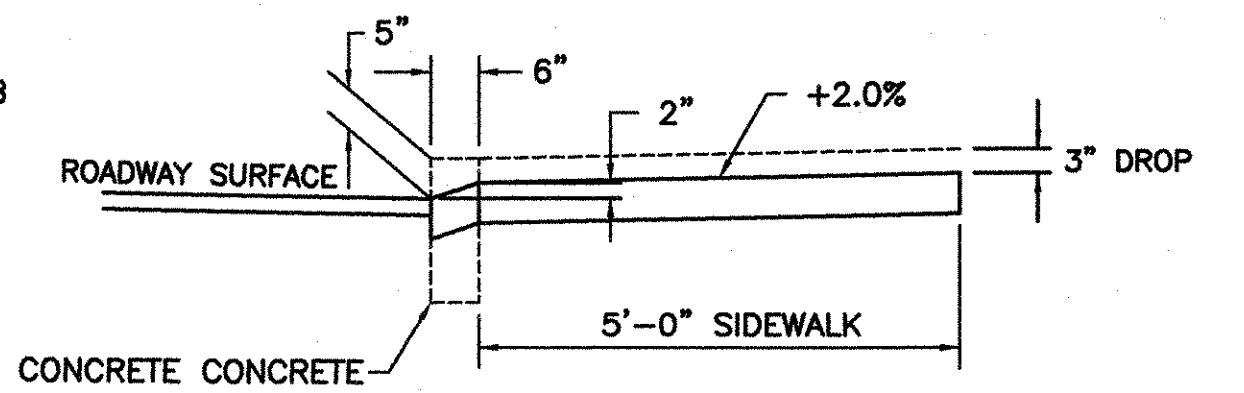

SECTION B-B

DRIVEWAY PAVEMENT STRUCTURE:

- FOR PAVED DRIVES, USE 12" SUBBASE AND 3" OF MEDIUM DUTY BITUMINOUS CONCRETE PAVEMENT (MOD).
- FOR GRAVEL DRIVES, USE 12" SUBBASE AND 2" AGGREGATE SURFACE COURSE.
- ALL GRAVEL DRIVES WILL BE PAVED TO THE EXISTING RIGHT OF WAY WITH 3" OF MEDIUM DUTY BITUMINOUS CONCRETE PAVEMENT (MOD).

DATUM
VERTICAL _____
HORIZONTAL _____

SURVEYED BY	N/A	DATE	_____
DRAWN BY	TTS	DATE	01/12/98
SQUAD LEADER	JAW		
DESIGN FILE NO.	_____		
PRF FILE	_____	DATE PLOTTED	_____
PROJ. NAME	BURLINGTON		
PROJ. NO.	MEGC 5000(15)		
SHEET	5	OF	252 SHEETS