






VR-048  
\* FOR STD SIZE, REDUCE SPACING 25%

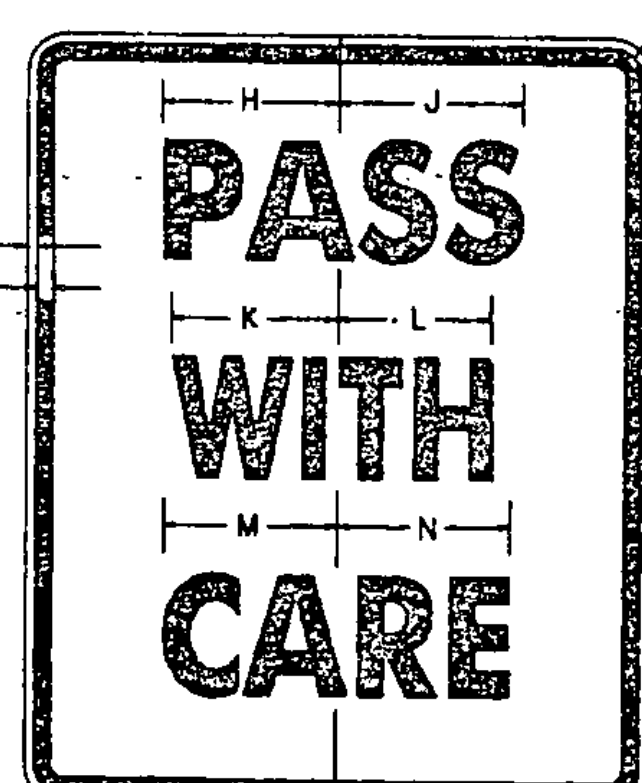


R4-2

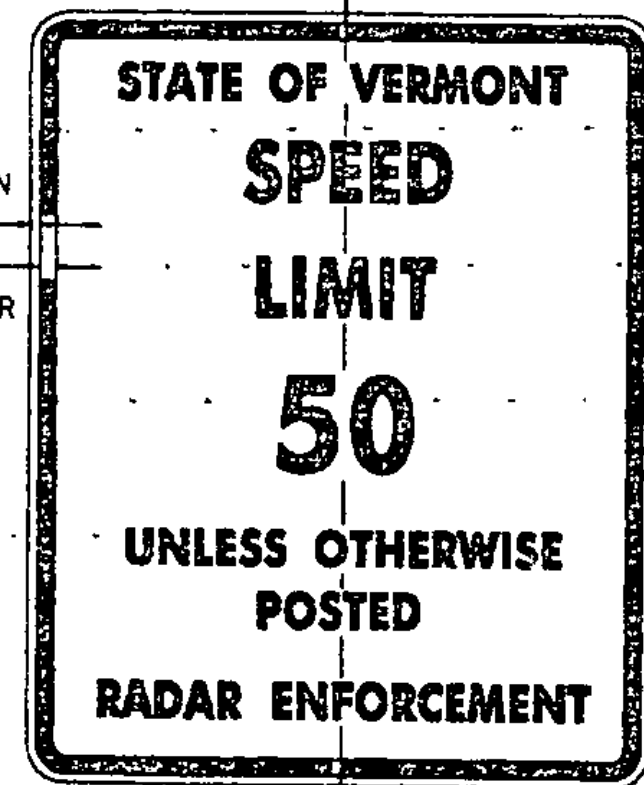

VR-114  
\* REDUCE SPACING 25%

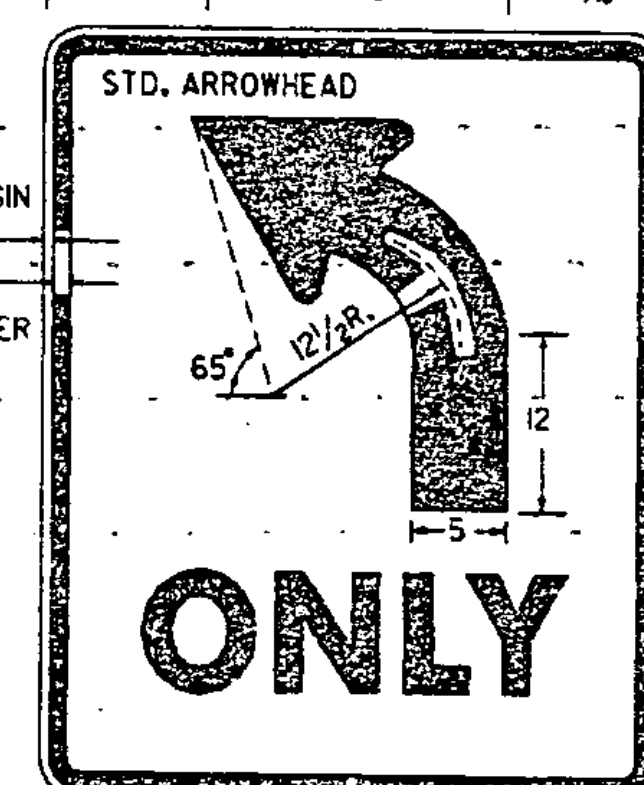

R3-5  
(OVERHEAD SIGN)

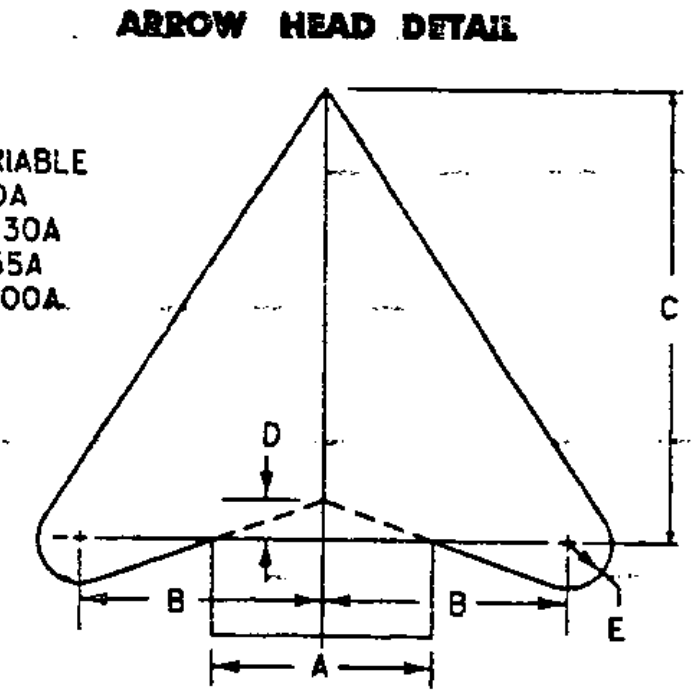


A=VARIABLE  
B=1.50A  
C=2.030A  
D=0.155A  
E=0.200A


SIGN	DIMENSIONS (INCHES)																
	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T
STD.	24	30	3/8	3/8	3	4B	3	3B	1 1/2	3B	2 1/2	9 1/2	10 5/8	10 1/8	6 5/8	8 5/8	1 1/2
EXPWY.	36	48	3/4	3/4	4	5	4	4	2	4	3	12	14 1/4	18 1/8	12 3/8	16 3/8	3
FWY.	48	60	3/4	3/4	6	7C	5	6B	4	6B	6	21	14 1/4	18 1/8	12 3/8	16 3/8	3

SIGN	DIMENSIONS (INCHES)													
	A	B	C	D	E	F	G	H	J	K	L	M	N	P
MIN.	18	24	3/8	3/8	3 1/2	4C	2 1/2	5 3/8	5 3/8	5	4 3/4	5 3/8	5 1/2	1 1/2
STD.	24	30	3/8	3/8	3 1/2	6C	2 1/2	8 3/8	8 3/8	7 1/2	7 3/8	8	8 1/4	1 1/2
EXPWY.	36	48	3/4	3/4	7	8C	5	10 1/8	11 1/4	10	9 1/2	10 1/8	11	2 1/4
FWY.	48	60	3/4	3/4	8	10C	7	13 3/8	14 3/8	12 1/2	11 3/8	13 3/8	13 3/4	3


DIMENSIONS (INCHES)					DIMENSIONS (INCHES)				
A	B	C	D	E	A	B	C	D	E
2	2 3/8	4 1/8	3/8	3/8	4 1/4	4 7/8	8 3/8	3/8	3/8
2 1/4	2 3/8	4 1/2	3/8	3/8	4 3/8	5	8 3/8	1/8	3/8
2 1/2	2 3/8	5 1/4	3/8	1/2	4 1/2	5 3/8	9 3/8	1/8	3/8
2 3/4	3 1/8	5 3/4	3/8	1/2	4 3/4	5 3/8	9 3/8	3/4	1
2 3/4	3 1/8	5 3/4	3/8	3/8	4 3/8	5 3/8	9 3/8	3/4	1
3	3 1/2	6 1/8	3/8	3/8	5	5 3/4	10 3/8	3/4	1
3 1/8	3 3/8	6 3/8	1/2	3/8	5 1/4	6	10 3/8	3/8	1 1/8
3 1/4	3 3/4	6 3/8	1/2	3/8	5 1/2	6 3/8	11 3/8	3/8	1 1/8
3 3/8	3 3/8	6 3/8	1/2	1/8	5 3/4	6 3/8	11 3/8	3/8	1 1/8
3 1/2	4	7 1/8	3/8	1/8	6	6 1/2	12 3/8	1/8	1 3/8
3 3/4	4 1/8	7 3/8	3/8	3/4	6 1/2	7 1/2	13 3/8	1	1 3/8
4	4 5/8	8 3/8	3/8	3/8	7	8	14 3/8	1 1/8	1 3/8
4 1/8	4 3/4	8 3/4	3/8	3/8	7 1/2	8 3/8	15 3/8	1 1/8	1 1/2
					8	9 3/8	16 3/4	1 1/4	1 5/8

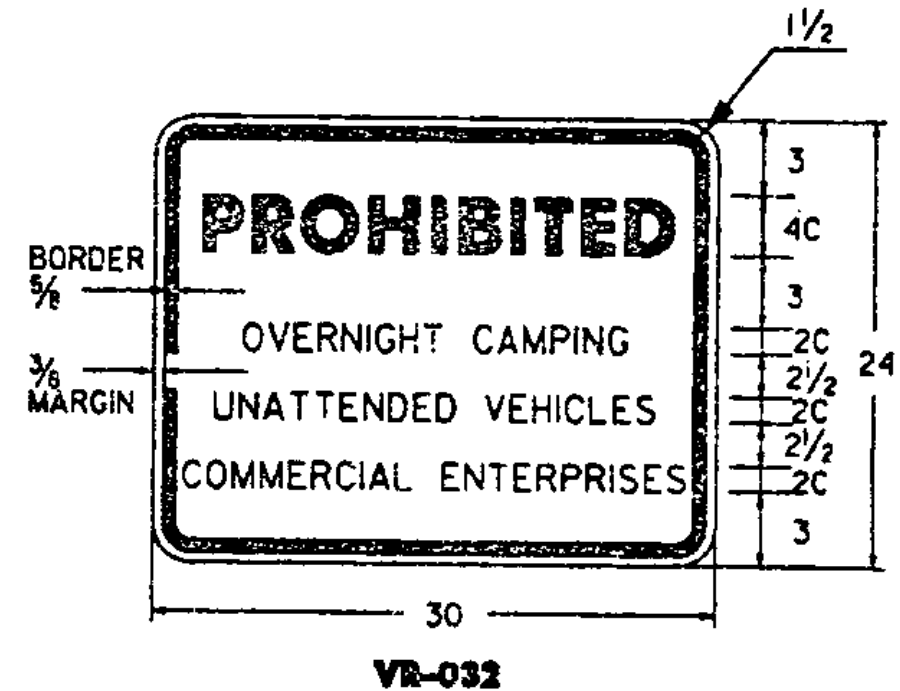


VR-032

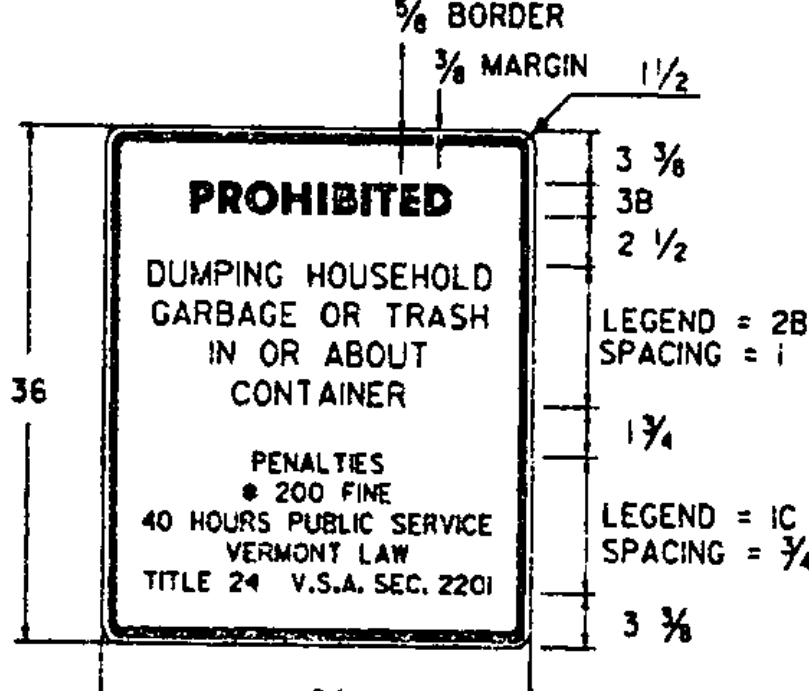


VR-023

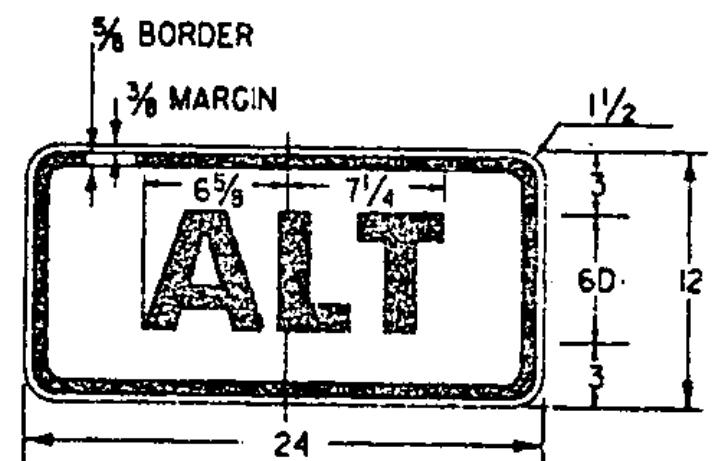


M4-1A

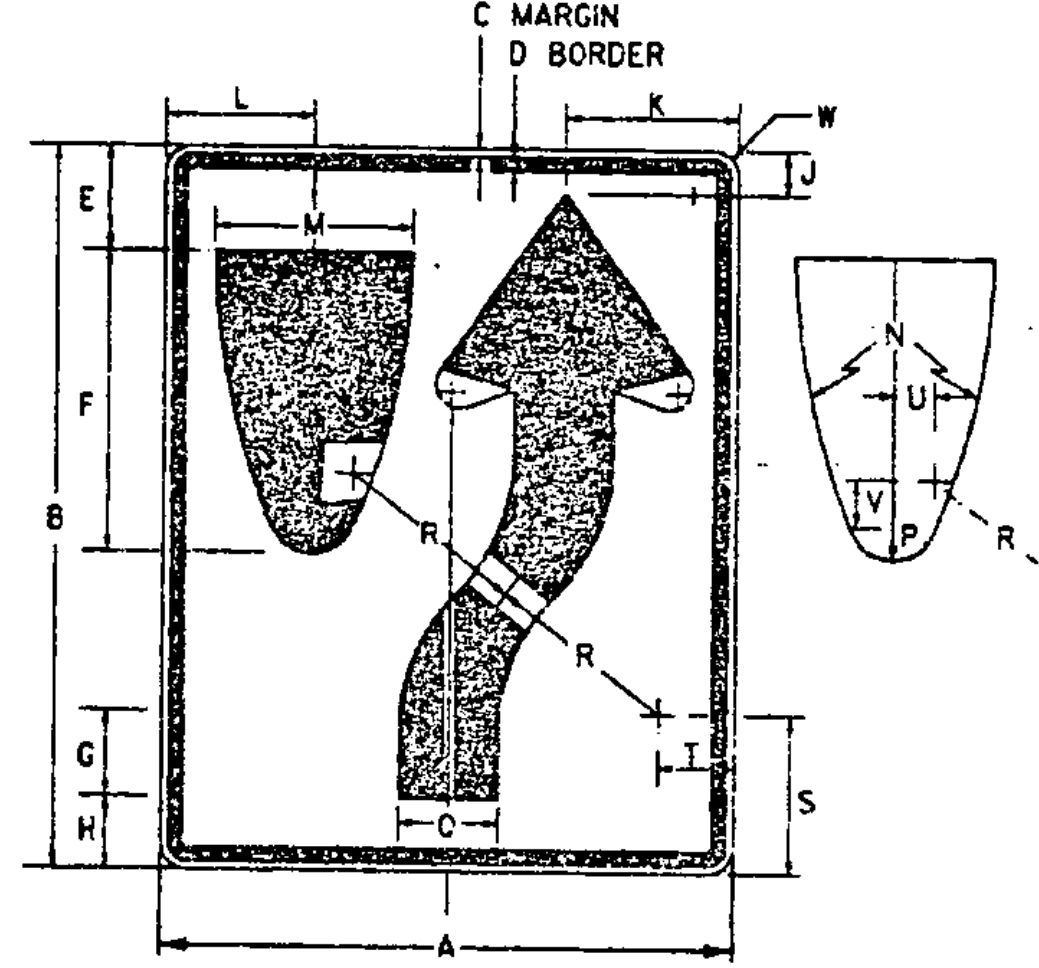

R4-7

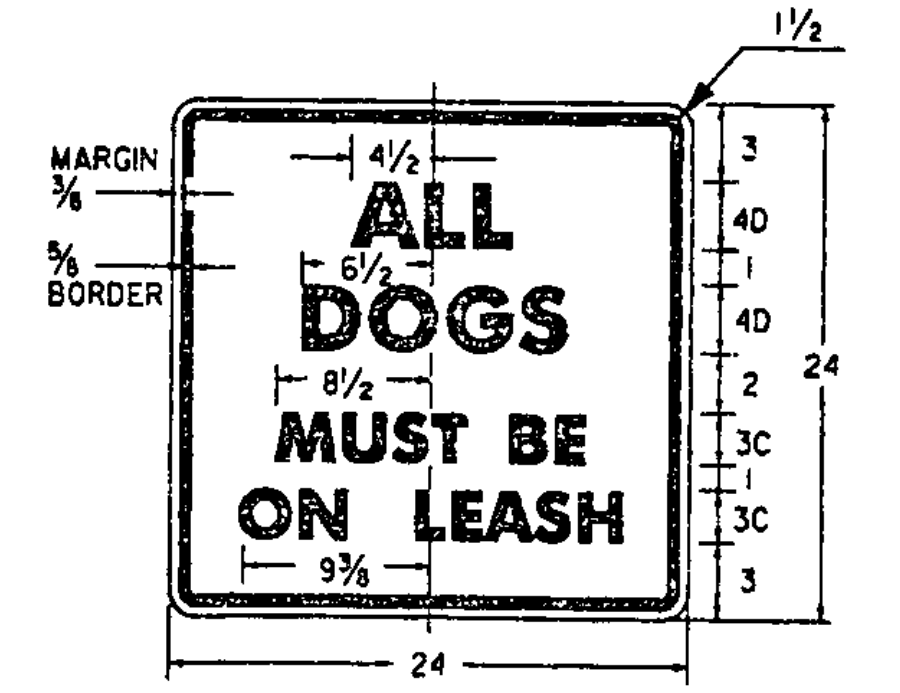

VR-648

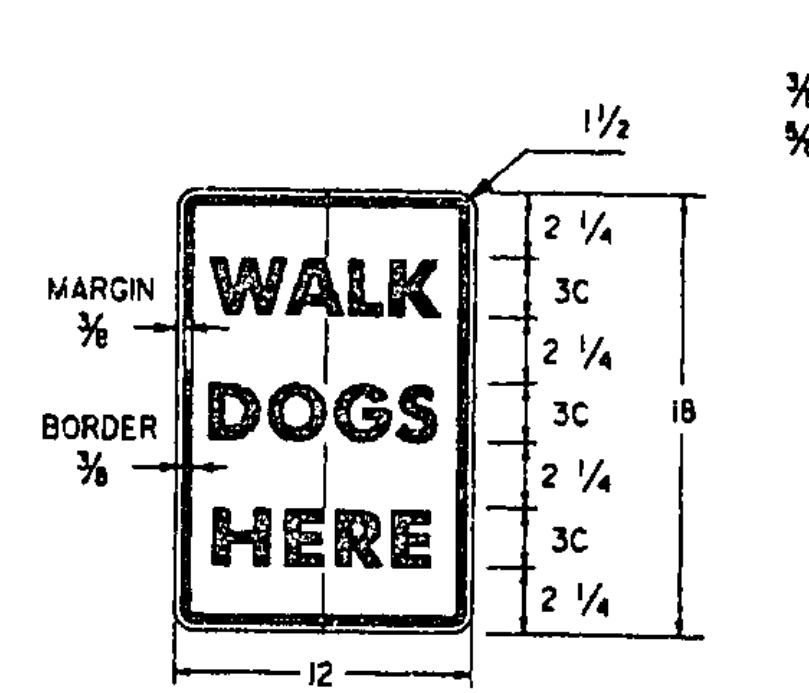

VR-341



VR-023b

GENERAL:

1. ALL DIMENSIONS IN INCHES.

COLORS:

THE REGULATORY SIGNS SHOWN ON THIS SHEET SHALL HAVE BLACK TEXT ON REFLECTORIZED WHITE BACKGROUND, UNLESS OTHERWISE NOTED. THE COLORS SHALL CONFORM WITH THE COLORS ADOPTED BY THE AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS AND APPROVED BY THE DEPARTMENT OF TRANSPORTATION, FEDERAL HIGHWAY ADMINISTRATION.

MATERIALS:

THE SIGN BASE MATERIALS USED FOR REGULATORY SIGNS SHOWN ON THIS SHEET MAY BE ANY OF THE FOLLOWING OF THE MINIMUM THICKNESS NOTED.

12' X 18'	24' X 12'	36' X 48'
18' X 24'	24' X 24'	48' X 60'
	24' X 36'	
	30' X 24'	
	0.060"	0.100"
	1/2"	5/8"
	18 GAGE	14 GAGE

FLAT SHEET ALUMINUM  
HIGH DENSITY OVERLAP PLYWOOD  
GALVANIZED FLAT SHEET STEEL

THE REFLECTIVE MATERIAL FOR GROUND MOUNTED SIGNS SHALL BE AASHTO TYPE II OR III WHITE REFLECTIVE SHEETING APPLIED TO THE ENTIRE BACKGROUND OF THE SIGN. WHEN MOUNTED OVERHEAD, ALL SIGNS SHALL HAVE ENCAPSULATED LENS REFLECTIVE SHEETING APPLIED TO THE ENTIRE BACKGROUND OF THE SIGN. THE TEXT OF THE SIGNS MAY BE LETTERING FILM, SILK SCREENED OR HAND PAINTED. HAND PAINTING MUST BE COMPARABLE IN QUALITY TO THE RESULTS OBTAINED BY SILK SCREENING.

SPECIFICATIONS:

REGULATORY SIGNS SHALL MEET THE VERMONT STANDARD SPECIFICATIONS FOR TRAFFIC SIGNS.

TEXT DESIGN:

LETTERS, DIGITS, ARROWS, SPACING AND TEXT DIMENSIONS SHALL CONFORM WITH THE STANDARD ALPHABET FOR HIGHWAY SIGNS AND PAVEMENT MARKINGS AND DESIGNS PRESCRIBED IN THE STANDARD HIGHWAY SIGNS AS SPECIFIED IN THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.

REVISIONS AND CORRECTIONS

JAN. 23, 1989 - DATE OF ORIGINAL ISSUE  
SEPT. 20, 1995 - ADDED AND DELETED SIGN DETAILS,  
ADDED SIGN ID NUMBERS, MINOR NOTE  
REVISIONS

APPROVED FOR THIS PROJECT  
AND/OR DESIGN IMPLEMENTATION,  
FHWA FINAL APPROVAL PENDING.


APPROVED

*Stephen A. MacArthur*  
DIRECTOR OF ENGINEERING

*David A. Ryan*  
TRAFFIC AND SAFETY ENGINEER

REGULATORY SIGN  
DETAILS

OTHER STDS. : NONE  
REQUIRED

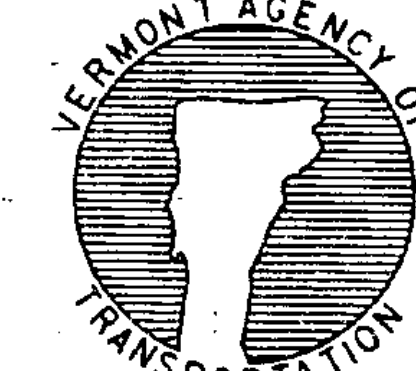

STANDARD  
E-144