


649.51 GEOTEXTILE FOR SILT FENCE
 STA. 417+49 - STA. 425+79 LT
 STA. 418+47 - STA. 425+37 RT

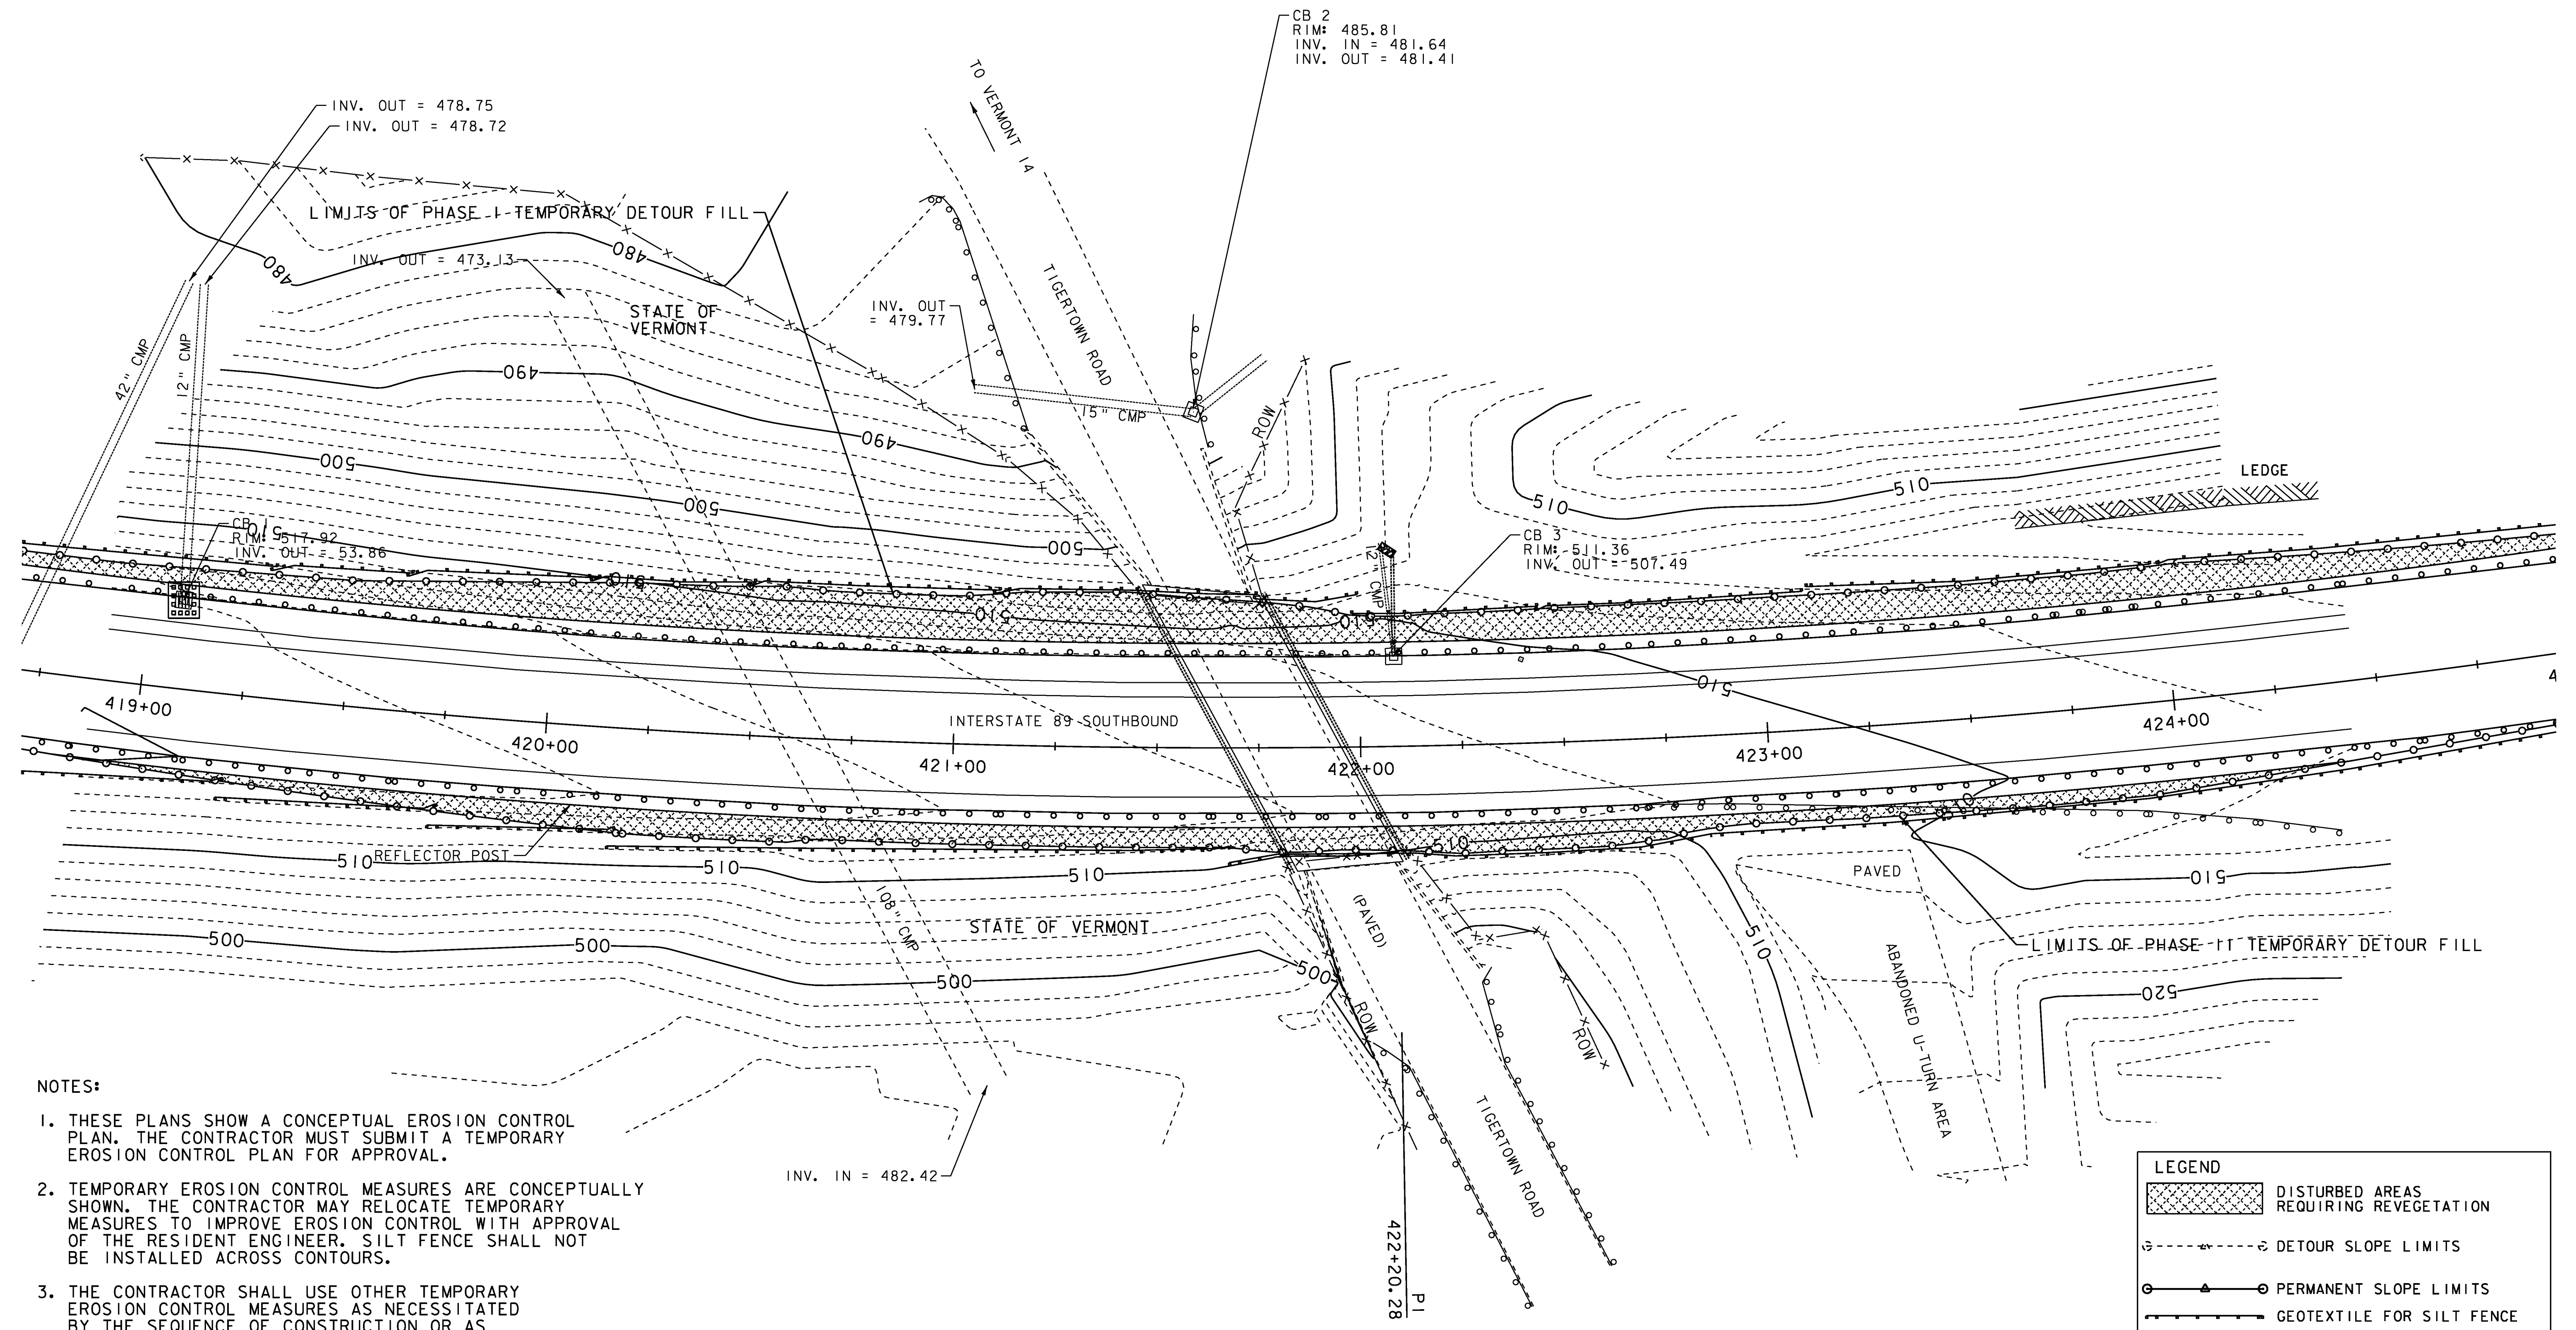

- NOTES:
1. THESE PLANS SHOW A CONCEPTUAL EROSION CONTROL PLAN. THE CONTRACTOR MUST SUBMIT A TEMPORARY EROSION CONTROL PLAN FOR APPROVAL.
 2. TEMPORARY EROSION CONTROL MEASURES ARE CONCEPTUALLY SHOWN. THE CONTRACTOR MAY RELOCATE TEMPORARY MEASURES TO IMPROVE EROSION CONTROL WITH APPROVAL OF THE RESIDENT ENGINEER. SILT FENCE SHALL NOT BE INSTALLED ACROSS CONTOURS.
 3. THE CONTRACTOR SHALL USE OTHER TEMPORARY EROSION CONTROL MEASURES AS NECESSITATED BY THE SEQUENCE OF CONSTRUCTION OR AS DIRECTED BY THE RESIDENT ENGINEER.
 4. REFER TO THE EROSION CONTROL DETAILS SHEET FOR ADDITIONAL DETAILS.
 5. ALL DISTURBED AREAS REQUIRING VEGETATION TO BE SEEDED, MULCHED AND TEMPORARY EROSION MATTING IN ACCORDANCE WITH THE LOW RISK HANDBOOK.

LEGEND	
	DISTURBED AREAS REQUIRING REVEGETATION
	DETOUR SLOPE LIMITS
	PERMANENT SLOPE LIMITS
	GEOTEXTILE FOR SILT FENCE
	RIGHT OF WAY FENCE
	INLET PROTECTION DEVICE, TYPE I

DATUM
 VERTICAL NAVD 88 (GPS DERIVED)
 HORIZONTAL NAD 83 (GPS DERIVED)

SCALE 1" = 20'-0"

PLOTTED 8/6/2010

EROSION CONTROL PLAN	PROJECT NAME: HARTFORD - SHARON	PLOT DATE: 8/6/2010
	PROJECT NUMBER: IM 089-(157)	DRAWN BY: SJL
	FILE NAME: 97A184.dgn PROJECT LEADER: CDL DESIGNED BY: SJL PLOT FILE: 97A184_33.1	CHECKED BY: EPD SHEET 33 OF 62