

C-CLAMPS—EXTRA HEAVY SERVICE STANDARD SCREW

- Standard C-clamp design
- Heavy-duty threaded hub provides maximum screw support
- Forcing screws have a square head to be turned with a wrench
- Forcing screws have a hardened tip

No.	C	T	D	Min. Test Load Pounds	Capacity
0-HD	0-1/4"	3/8"	3/8"	2,800	0.4
1-HD	0-1/2"	5/8"	3/4"	5,600	0.7
1 1/2-HD	0-3/4"	1 1/8"	3/4"	8,750	1.0
2-HD	1-0"	1 3/8"	1"	11,200	13.1


CID A-A-429C

C-CLAMPS—HEAVY SERVICE STANDARD SCREW

- Designed for heavy service applications where the strength of the cast-iron body is not required
- Cast-iron body with a high strength steel frame with a hardened tip
- Forcing screws are lined with impact resistant plastic

No.	C	T	D	Min. Test Load Pounds	Capacity
102SS	0-2"	1 1/2"	3/4"	7,200	1.3
103SS	0-3"	1 3/4"	3/4"	8,750	2.6
104SS	0-4"	2"	3/4"	10,000	4.1
106SS	2-6"	2 1/2"	3/4"	11,250	5.9
108SS	4-8"	2 1/2"	3/4"	12,500	8.0
110SS	6-10"	2 1/2"	3/4"	13,750	11.6
112SS	8-12"	2 1/2"	3/4"	15,000	15.8
115SS	10-15"	2 1/2"	3/4"	16,250	19.8
118SS	12-18"	2 1/2"	3/4"	17,500	24.2

CID A-A-429C

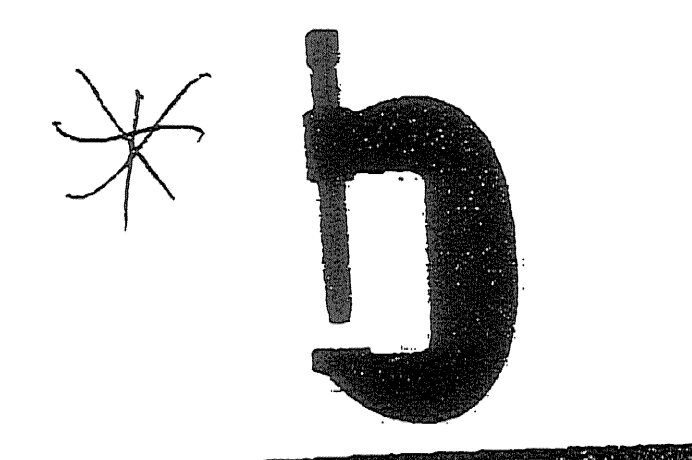

C-CLAMPS—EXTRA HEAVY SERVICE FULL LENGTH SCREW

- Full length forcing screws provide greater versatility with the maximum capacity always being "T"
- Heavy-duty threaded hub provides maximum screw support
- Forcing screws have a square head to be turned with a wrench
- Forcing screws have a hardened tip

No.	C	T	D	Min. Test Load Pounds	Capacity
2-HDL	0-2 1/2"	1 1/2"	3/4"	12,500	3.4
3-HDL	0-3 1/2"	2"	3/4"	16,250	6.1
4-HDL	0-4 1/2"	2 1/2"	1"	20,000	10.3
5-HDL	0-5 1/2"	3"	1 1/4"	23,800	14.2
6-HDL	0-6 1/2"	3 1/2"	1 1/2"	27,500	20.2
8-HDL	0-8 1/2"	4 1/2"	1 3/4"	31,250	28.1
10-HDL	0-10 1/2"	5 1/2"	1 3/4"	35,000	37.3
12-HDL	0-12 1/2"	6 1/2"	1 3/4"	40,000	49.8

C-CLAMPS—STANDARD SERVICE DEEP THROAT FULL LENGTH SCREW

- Standard service deep throat style for the extra large capacity
- Max torque for strength and hard use
- Forcing screw has heavy ribbed design to allow for easy turning
- Easily under pressure and is very compressible in design
- Forcing screw has a sliding T handle and an impact resistant pad
- Full length forcing screws provide greater versatility with the maximum capacity always being "T"

No.	C	T	D	Min. Test Load Pounds	Capacity
402	0-2"	2"	3/4"	2,500	1.3
403	0-3"	2 1/2"	3/4"	3,500	2.0
404	0-4"	3"	3/4"	5,500	2.5
405	0-5"	3 1/2"	3/4"	6,800	5.0
406	0-6"	4"	3/4"	6,900	7.0
410	0-10"	5 1/2"	3/4"	8,000	10.5
412	0-12"	6 1/2"	3/4"	9,500	15.5