


INTERCHANGE 1 TYPICAL SECTION

STA. 0+016.093 TO STA. 0+242.000

TRAVEL LANES & DECELERATION LANE, MEDIAN AND SHOULDERS

45 mm SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28), WEARING COURSE, TYPE III S
 15 mm SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28), LEVELING COURSE, TYPE IV S

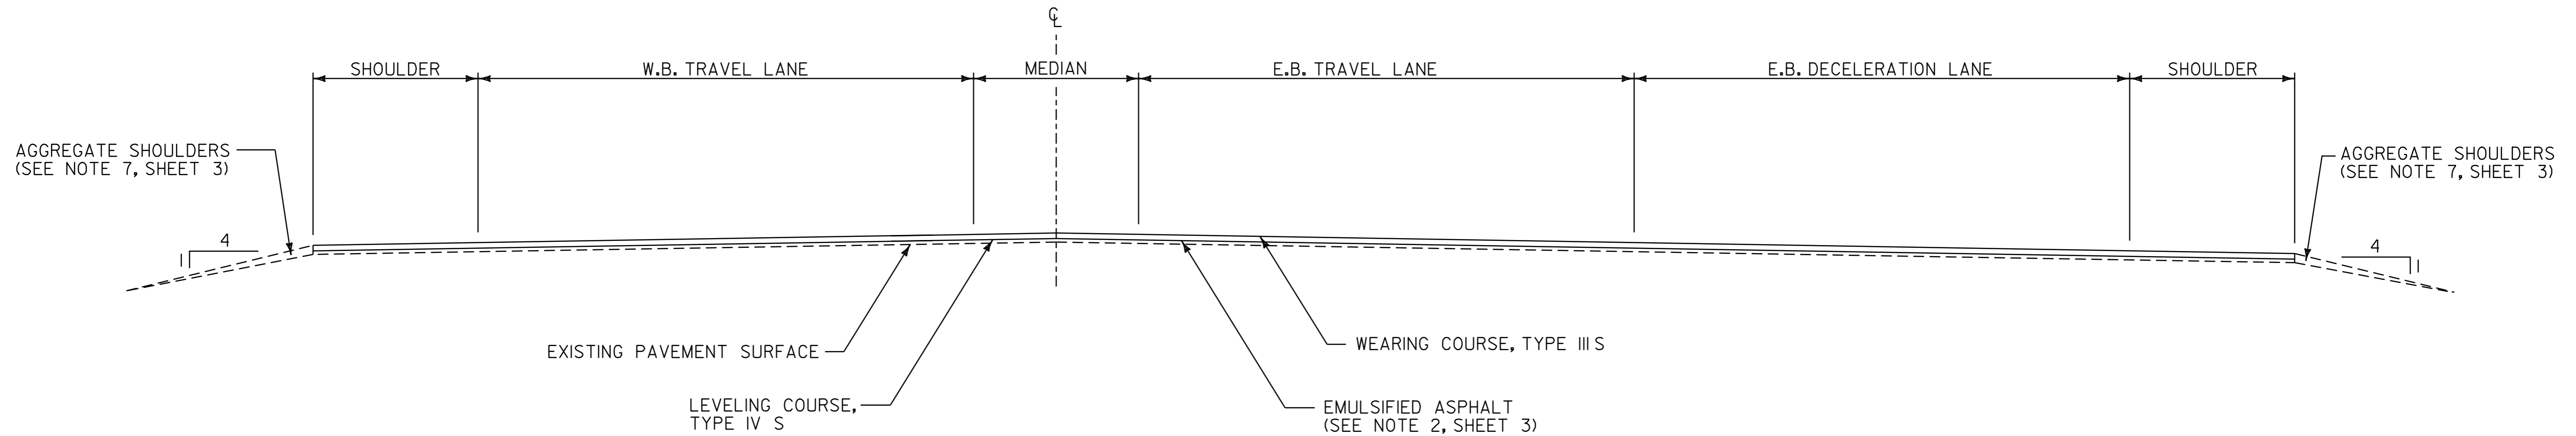


PROJECT PAVING LIMITS

ROUTE	BEGIN STATION	END STATION	LANE TYPICAL	WEARING DEPTH	LEVELING +	NOTES
U.S. ROUTE 4	0+016.093	0+242.000	VARIES	45 mm	250	TRAVEL LANES & DECELERATION LANE, MEDIAN AND SHOULDERS: LEVEL WITH 15 mm TYPE IV S, PAVE WITH 40 mm TYPE III S

U-TURN PAVEMENT TYPICAL

45 mm SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28), WEARING COURSE, TYPE III S
 15 mm SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28), LEVELING COURSE, TYPE IV S
 EMULSIFIED ASPHALT TO BE APPLIED @ 0.70 L/m² OR AS DIRECTED BY RESIDENT ENGINEER

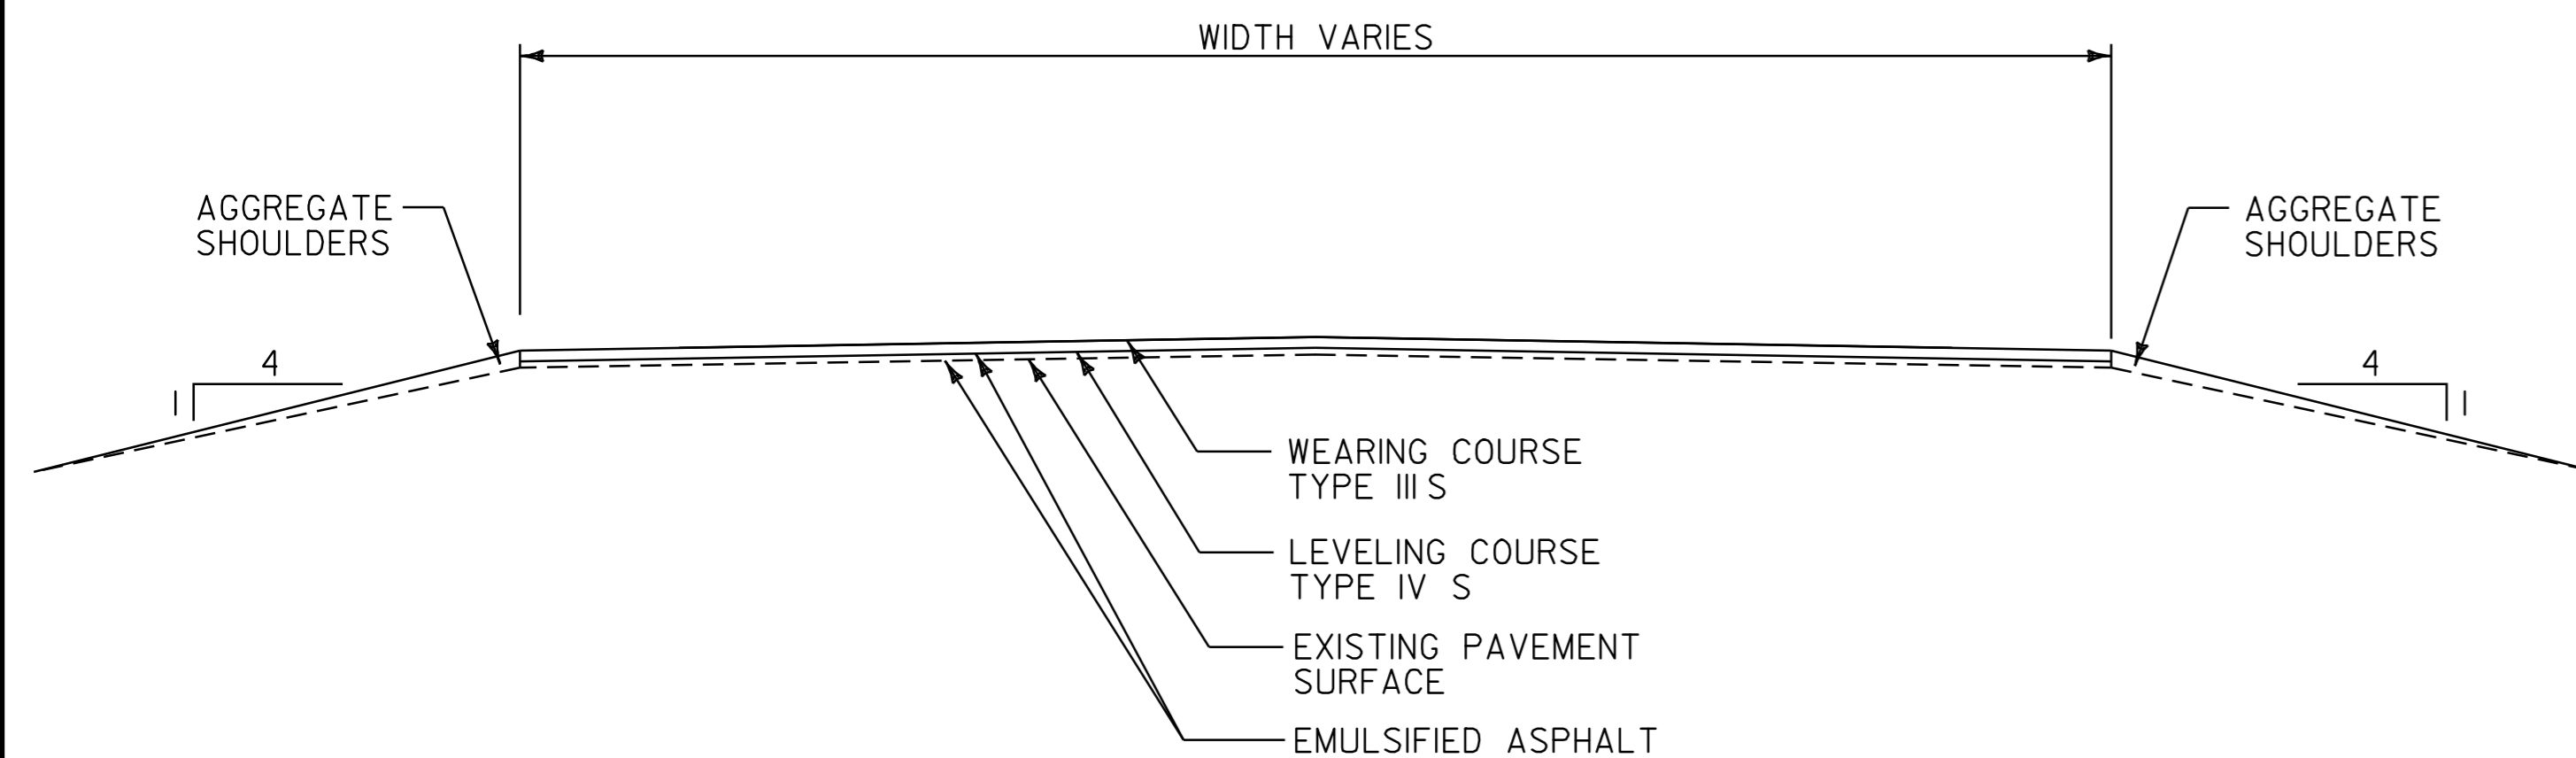


U-TURN LOCATIONS

STA. 1+941.000	STA. 8+177.000	STA. 16+573.000	STA. 26+531.000
STA. 3+547.000	STA. 9+397.000	STA. 18+477.000	STA. 28+044.000
STA. 5+018.000	STA. 12+130.000	STA. 20+805.000	STA. 28+602.000
STA. 6+497.000	STA. 13+045.000	STA. 23+375.000	STA. 29+553.000
STA. 6+881.000	STA. 14+519.000	STA. 24+367.000	STA. 30+095.000

RAMP PAVEMENT TYPICAL

45 mm SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28), WEARING COURSE, TYPE III S
 15 mm SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28), LEVELING COURSE, TYPE IV S
 EMULSIFIED ASPHALT TO BE APPLIED @ 0.70 L/m² OR AS DIRECTED BY RESIDENT ENGINEER

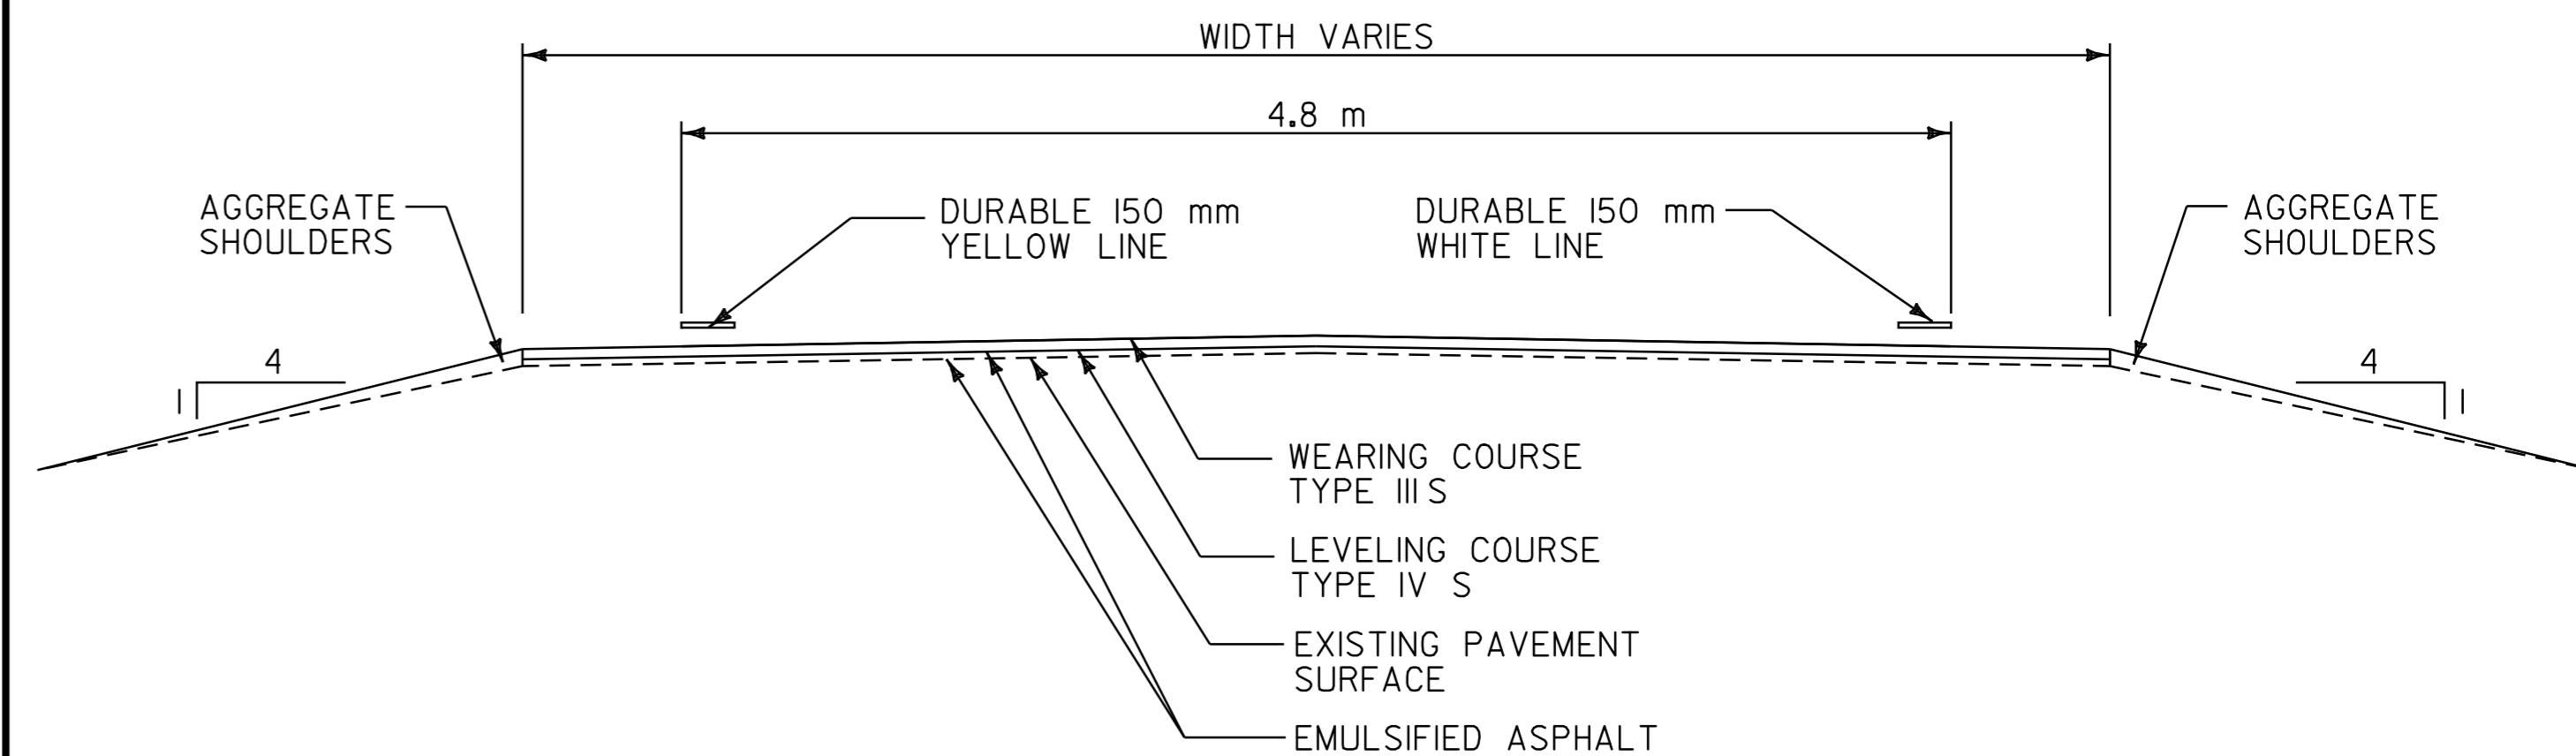

INTERCHANGE 1, U-TURN & RAMP TYPICAL SECTION SHEET

SURVEYED BY	N/A	DATE	N/A
DRAWN BY	E.C.D.	DATE	8/98
SQUAD LEADER	T.P.K.		
DESIGN FILE NO.	/pave/96b154/pb154.dgn		
IPARM FILE	pb154.i	DATE PLOTTED	N/A
PROJ. NAME	FAIR HAVEN - RUTLAND		
PROJ. NO.	NH 9727(I)S		
SHEET	4 OF 119	SHEETS	

DATUM	
VERTICAL	N/A
HORIZONTAL	N/A