


R10-6

SIGN	A	B	C	D	E	F	G	H
STD.	24	36	3/8	3/8	4	5D	2 1/2	3D
SPECIAL	36	48	5/8	7/8	6	6D	4	4D


SIGN	J	K	L	M	N	P	Q
STD.	14	8 1/2	9 1/2	5 1/2	2 1/2	14 1/2	1 1/2
SPECIAL	18	9 3/4	12 1/2	7 1/8	2 3/4	16	2 1/4

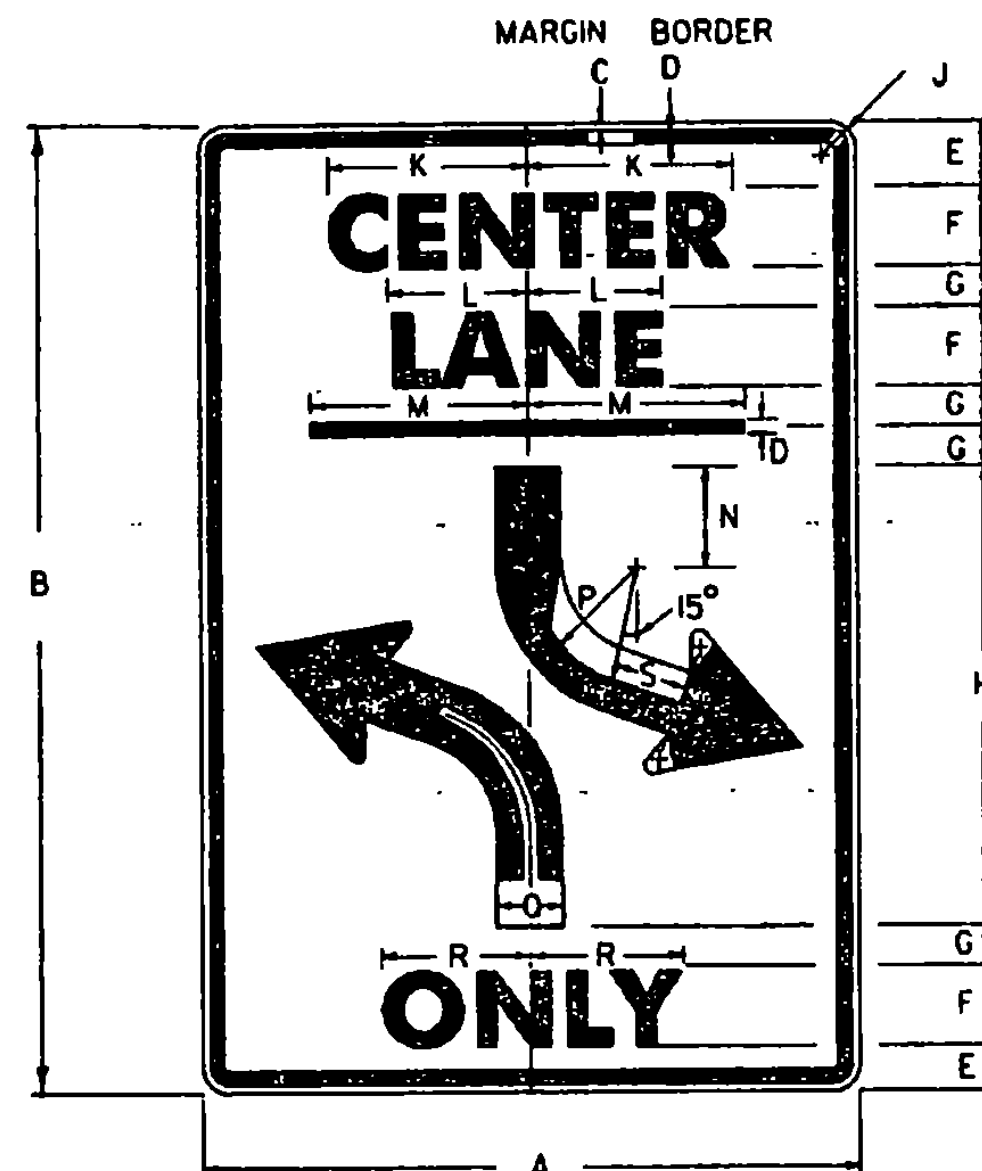


R3-9B

SIGN	DIMENSIONS (INCHES)										
	A	B	C	D	E	F	G	H	J	K	
STD.	24	36	3/8	3/8	2 1/2	3E	1 1/2	16	1 1/2	8 1/8	
SPECIAL	36	48	5/8	7/8	3 1/2	5E	1 1/2	20	2 1/4	14 1/8	


SIGN	L	M	N	P	O	R	S
STD.	5 3/4	8	2 1/2	6	2	5 5/8	1 1/2
SPECIAL	9 1/2	12	3	8	3	9 1/8	2

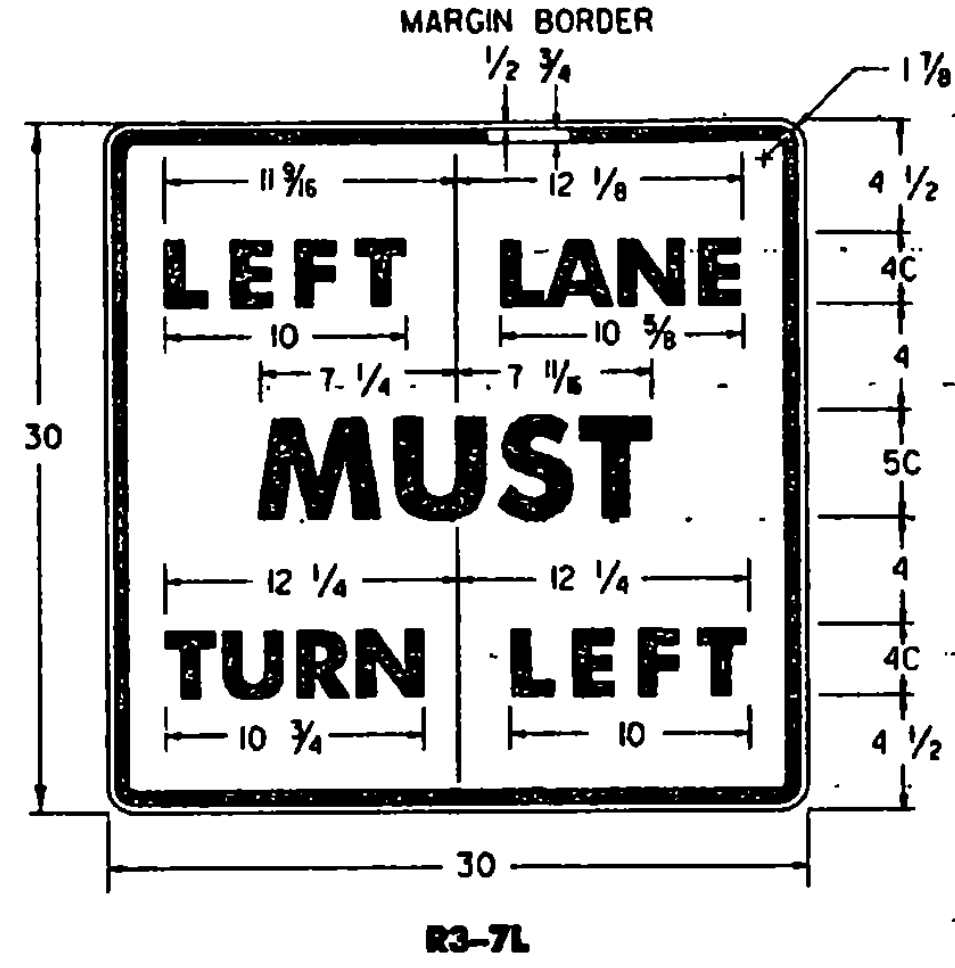


R3-7L

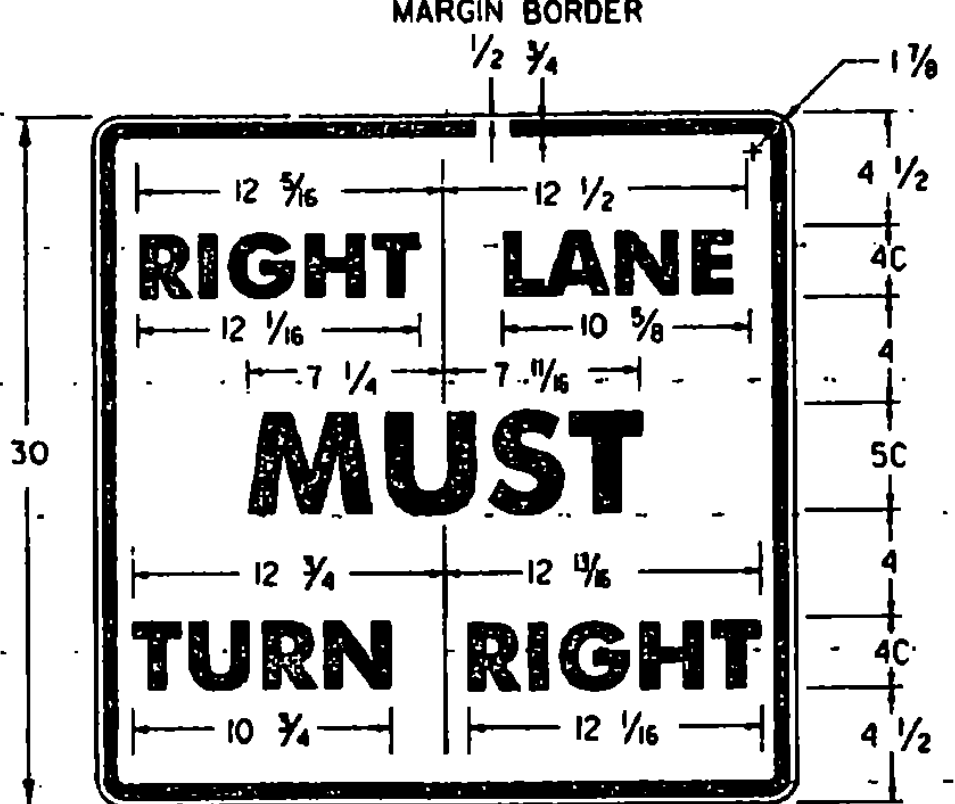

R3-7R

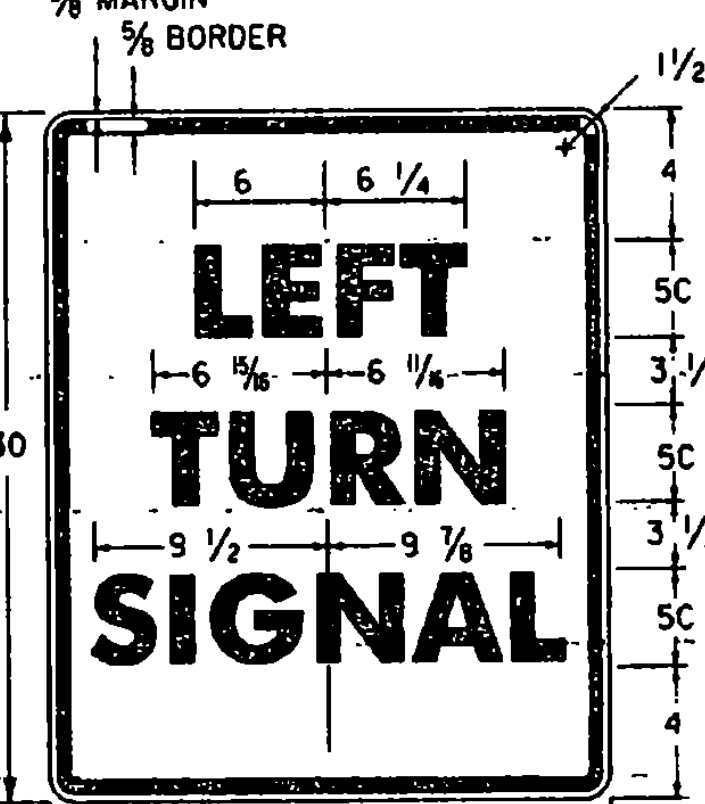


R10-10L

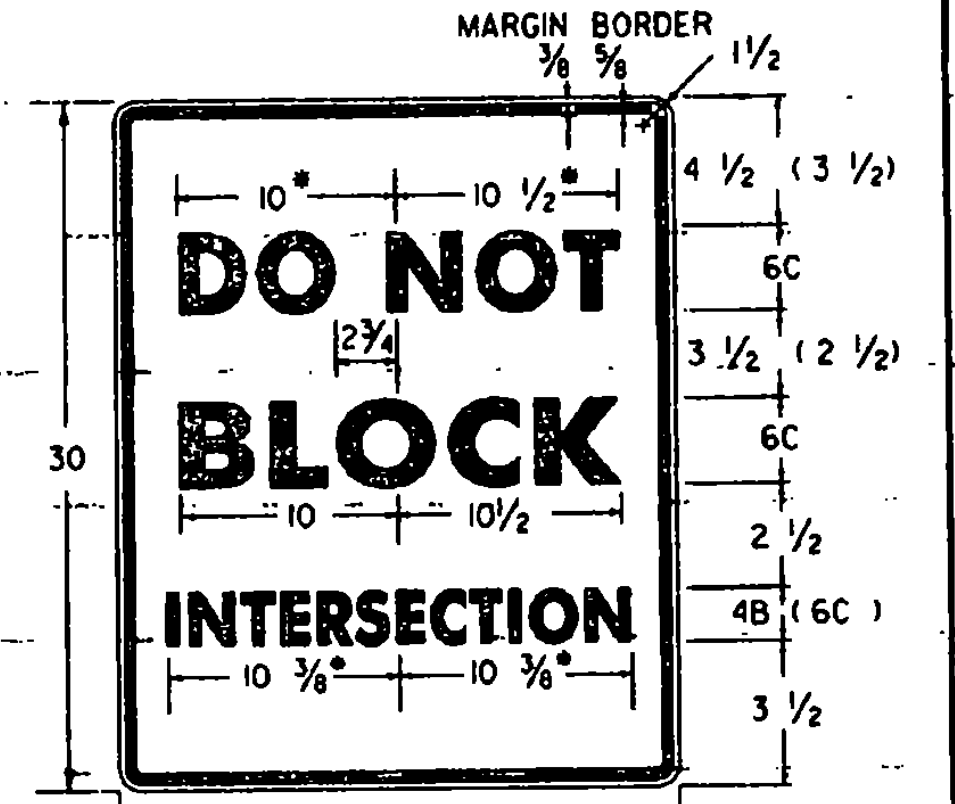


R10-7


* REDUCE SPACING 50 %
() INDICATES DIMENSIONS FOR "DO NOT BLOCK DRIVE" SIGN

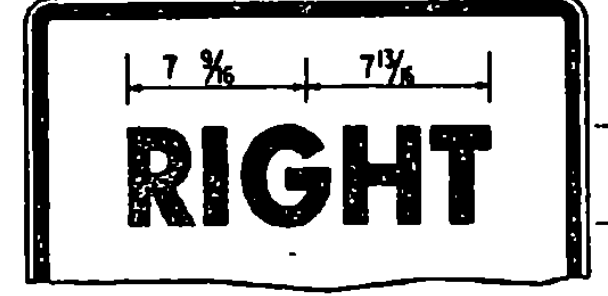

R10-10R

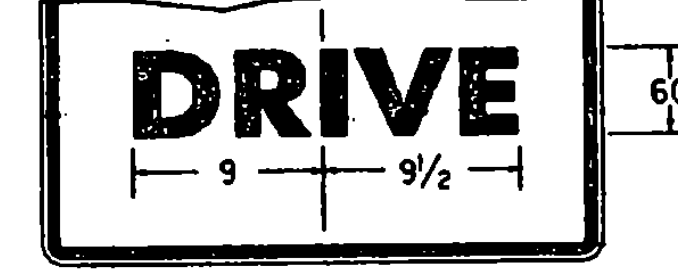

VR-656

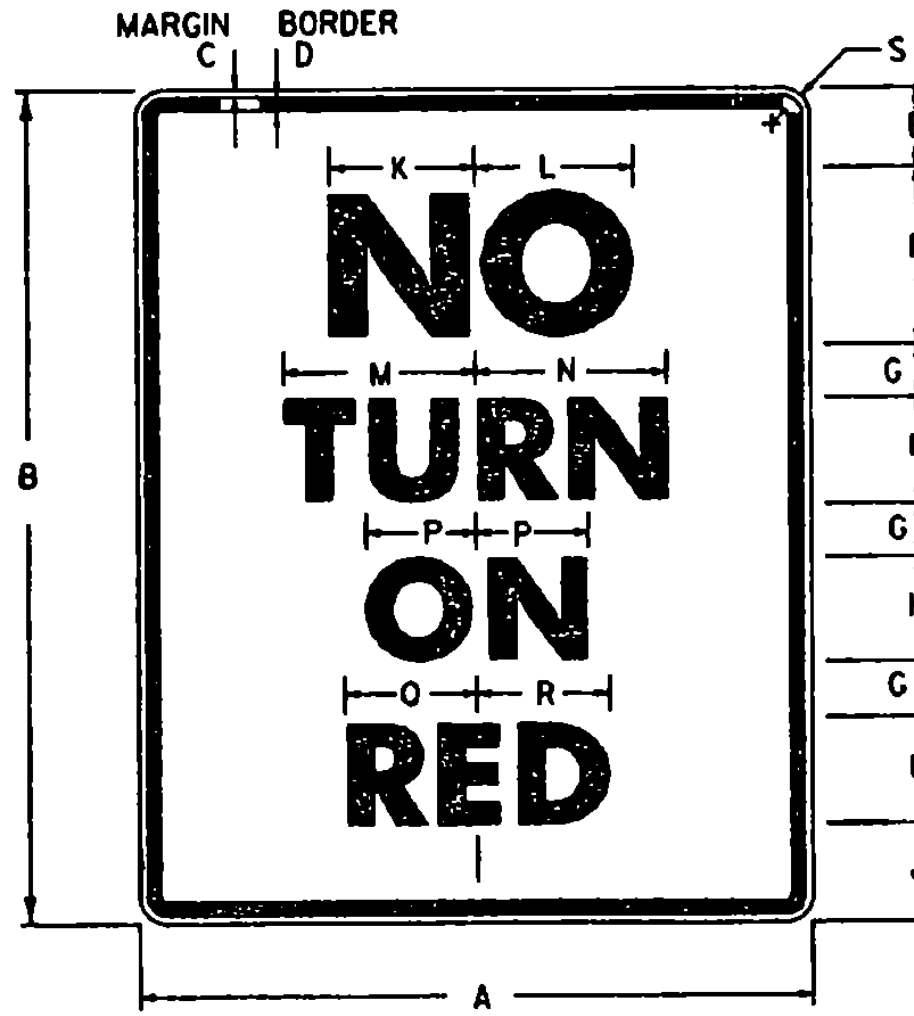


R10-11A

R10-11A

SIGN	DIMENSIONS (INCHES)										
	A	B	C	D	E	F	G	H	J	K	
STD.	24	30	3/8	3/8	3 1/4	5E	2 1/4	4D	3	4 1/8	
SPECIAL	36	48	5/8	7/8	6	6E	3 1/2	6D	5 1/2	7 3/4	


SIGN	L	M	N	P	Q	R	S
STD.	5 3/8	6 5/8	6 1/2	3 1/2	4 3/8	4 1/8	1 1/2
SPECIAL	8 1/4	10	9 3/4	5 1/4	6 3/8	7 3/8	2 1/4

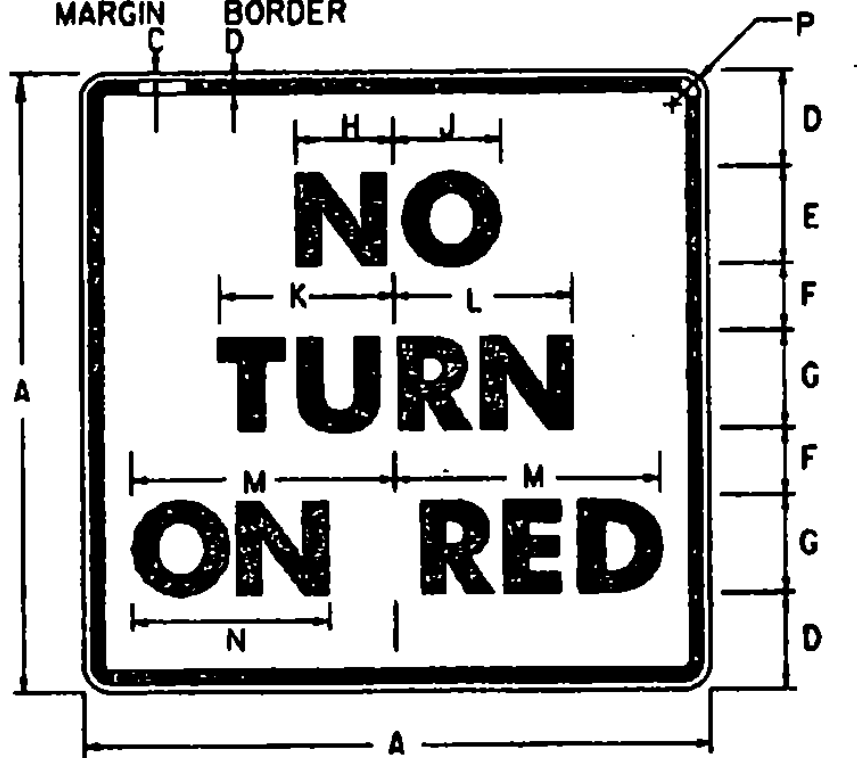


R10-11B

R10-11B


SIGN	DIMENSIONS (INCHES)													
	A	B	C	D	E	F	G	H	J	K	L	M	N	P
MIN.	18	3/8	3/8	2 3/4	3E	1 3/4	3D	2 3/8	3 1/8	5	4 1/8	7 1/8	5 1/4	1 1/2
STD.	24	3/8	3/8	3 1/2	4E	2 1/2	4D	3 3/8	4 1/8	6 3/8	6 1/2	9 1/2	6 1/2	1 1/2
SPECIAL	30	1/2	3/4	4 1/2	5E	3	5D	4 3/8	5 3/8	8 1/4	8 1/8	11 3/8	7 3/4	1 3/8

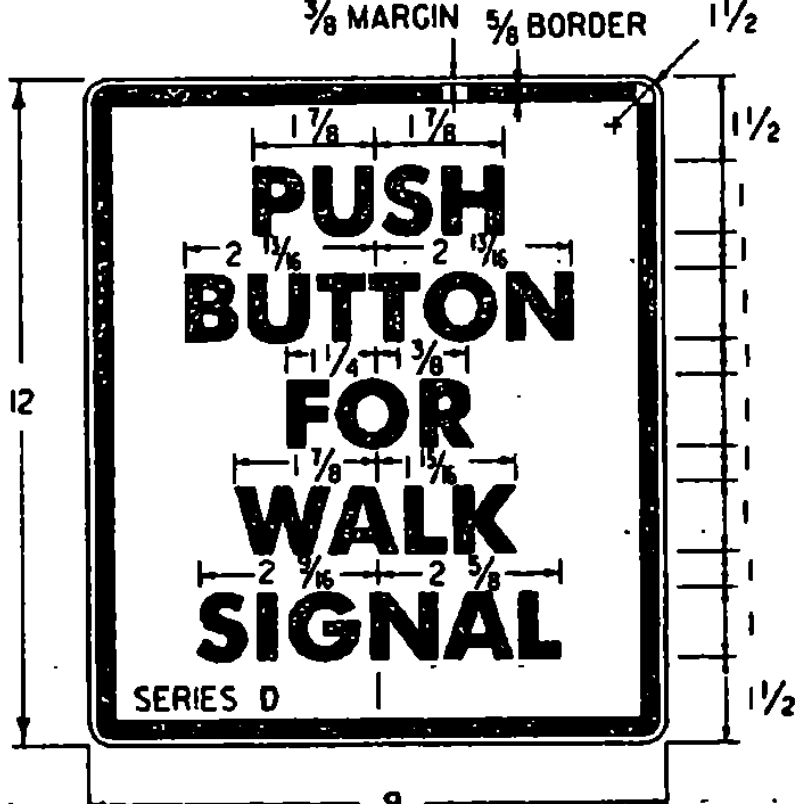


R10-4

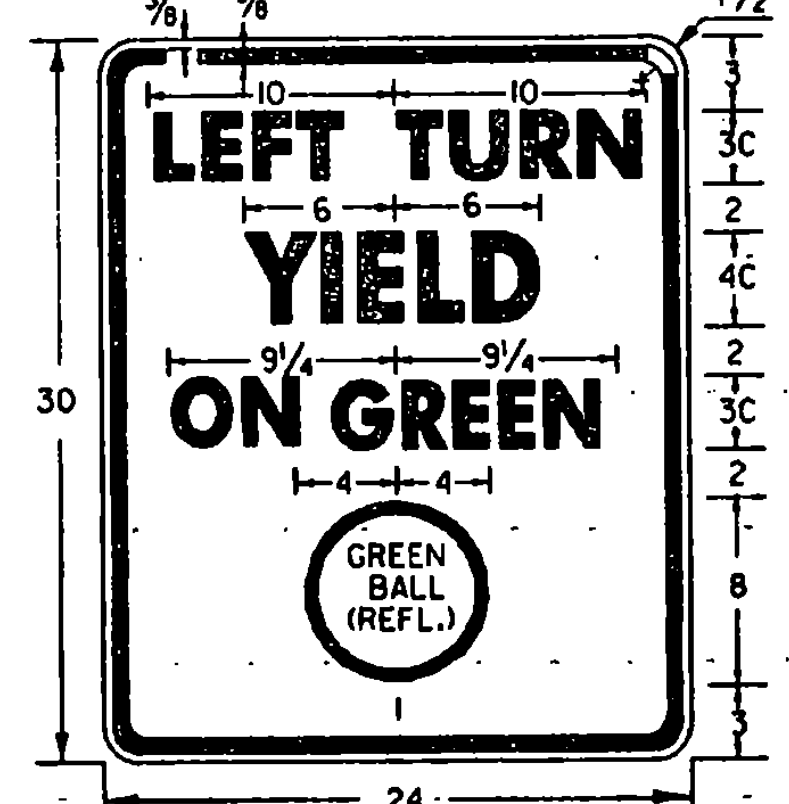

R10-12

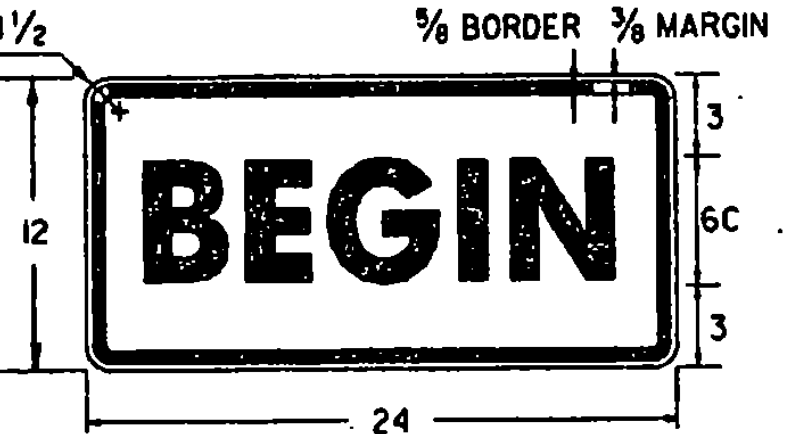

M4-11

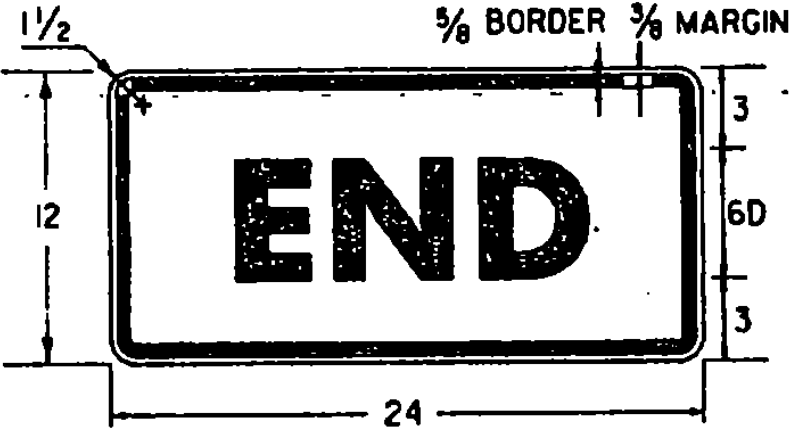

M4-6

GENERAL:

1. ALL DIMENSIONS IN INCHES.
2. SEE STANDARD E-144 FOR ARROWHEAD DETAILS.

COLORS:

THE REGULATORY SIGNS SHOWN ON THIS SHEET SHALL HAVE BLACK TEXT ON REFLECTORIZED WHITE BACKGROUND, UNLESS OTHERWISE NOTED. THE COLORS SHALL CONFORM WITH THE COLORS ADOPTED BY THE AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS AND APPROVED BY THE DEPARTMENT OF TRANSPORTATION, FEDERAL HIGHWAY ADMINISTRATION.

MATERIALS:

THE SIGN BASE MATERIALS USED FOR REGULATORY SIGNS SHOWN ON THIS SHEET MAY BE ANY OF THE FOLLOWING OF THE MINIMUM THICKNESS NOTED.

24' X 12'	24' X 24'	24' X 30'	24' X 36'	36' X 48'
9' X 12'	18' X 18'	0.060"	0.080"	0.100"
		1 1/2"	1 1/2"	5/8"
		18 GAGE	16 GAGE	14 GAGE

FLAT SHEET ALUMINUM
HIGH DENSITY OVERLAIN PLYWOOD
GALVANIZED FLAT SHEET STEEL

THE REFLECTIVE MATERIAL FOR GROUND MOUNTED SIGNS SHALL BE AASHTO-TYPE-III OR IIII WHITE REFLECTIVE SHEETING APPLIED TO THE ENTIRE BACKGROUND OF THE SIGN. WHEN MOUNTED OVERHEAD, ALL SIGNS SHALL HAVE ENCAPSULATED LENS REFLECTIVE SHEETING APPLIED TO THE ENTIRE BACKGROUND OF THE SIGN. THE TEXT OF THE SIGNS MAY BE LET-TERING FILM, SILK SCREENED OR HAND PAINTED. HAND PAINTING MUST BE COMPARABLE IN QUALITY TO THE RESULTS OBTAINED BY SILK SCREENING.

SPECIFICATIONS

REGULATORY SIGNS SHALL MEET THE VERMONT STANDARD SPECIFICATIONS FOR TRAFFIC SIGNS.

TEXT DESIGN:

LETTERS, DIGITS, ARROWS, SPACING AND TEXT DIMENSIONS SHALL CONFORM WITH THE STANDARD ALPHABET FOR HIGHWAY SIGNS AND PAVEMENT MARKINGS AND DESIGNS PRESCRIBED IN THE STANDARD HIGHWAY SIGNS AS SPECIFIED IN THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.

OTHER STDS.: E-144
REQUIRED



STANDARD
E-140

REVISIONS AND CORRECTIONS

- OCT. 30, 1987 - DATE OF ORIGINAL ISSUE
- SEPT. 20, 1995 - ADDED SIGN ID NUMBERS, MINOR NOTE REVISIONS, SHEET REALIGNMENT
- AUG. 30, 1996 - MADE ERROR CORRECTIONS TO SIGN DETAILS R10-6 & R10-11B

APPROVED FOR THIS PROJECT AND/OR DESIGN IMPLEMENTATION. FHWA FINAL APPROVAL PENDING.

APPROVED

John K. ...
DIRECTOR OF ENGINEERING

David A. Ross
TRAFFIC AND SAFETY ENGINEER

REGULATORY SIGN
DETAILS