

TEMPORARY & DURABLE 100 mm WHITE LINE

ST. ALBANS TOWN STA. 4+300.0 TO 4+667.3, SOLID LT. & RT.
(WITH EDGELINE BREAK FOR JEWETT AVE.)
STA. 4+511.0, DOUBLE SOLID LT. (JEWETT AVE. EDGELINES)
SWANTON STA. 0+000.00 TO 0+020.0, SOLID LT. & RT.

TEMPORARY & DURABLE 100 mm YELLOW LINE

ST. ALBANS TOWN STA. 4+300.0 TO 4+361.3, SOLID LT./ DASHED RT.
ST. ALBANS TOWN STA. 4+361.3 TO 4+514.2, SOLID LT. & RT.
(WITH CENTERLINE BREAK FOR JEWETT AVE.)
STA. 4+511.0, DOUBLE SOLID LT. (JEWETT AVE. CENTERLINE)
ST. ALBANS TOWN STA. 4+514.2 TO 4+667.3, SOLID LT./ DASHED RT.
SWANTON STA. 0+000.00 TO 0+020.0, SOLID LT./ DASHED RT.

TEMPORARY & DURABLE 600 mm STOP BAR

STA. 4+511.0, LT.

TEMPORARY & DURABLE LETTER OR SYMBOL

STA. 4+511.0, LT - STOP


ERECTING SALVAGED SIGNS
AS SHOWN - 3

REMOVING SIGNS
AS SHOWN - 4

REMOVAL AND DISPOSAL OF GUARD RAIL
STA. 4+536.5 TO 4+633.0, LT.
STA. 4+565.7 TO 4+618.9, RT.

STEEL BEAM GUARD RAIL
STA. 4+546.4 TO 4+622.4, LT.
STA. 4+565.7 TO 4+618.9, RT.

MANUFACTURED TERMINAL SECTION (FLARED)
STA. 4+535.0 TO 4+546.4, LT.
STA. 4+554.3 TO 4+565.7, RT.
STA. 4+618.9 TO 4+630.3, RT.
STA. 4+622.4 TO 4+633.8, LT.

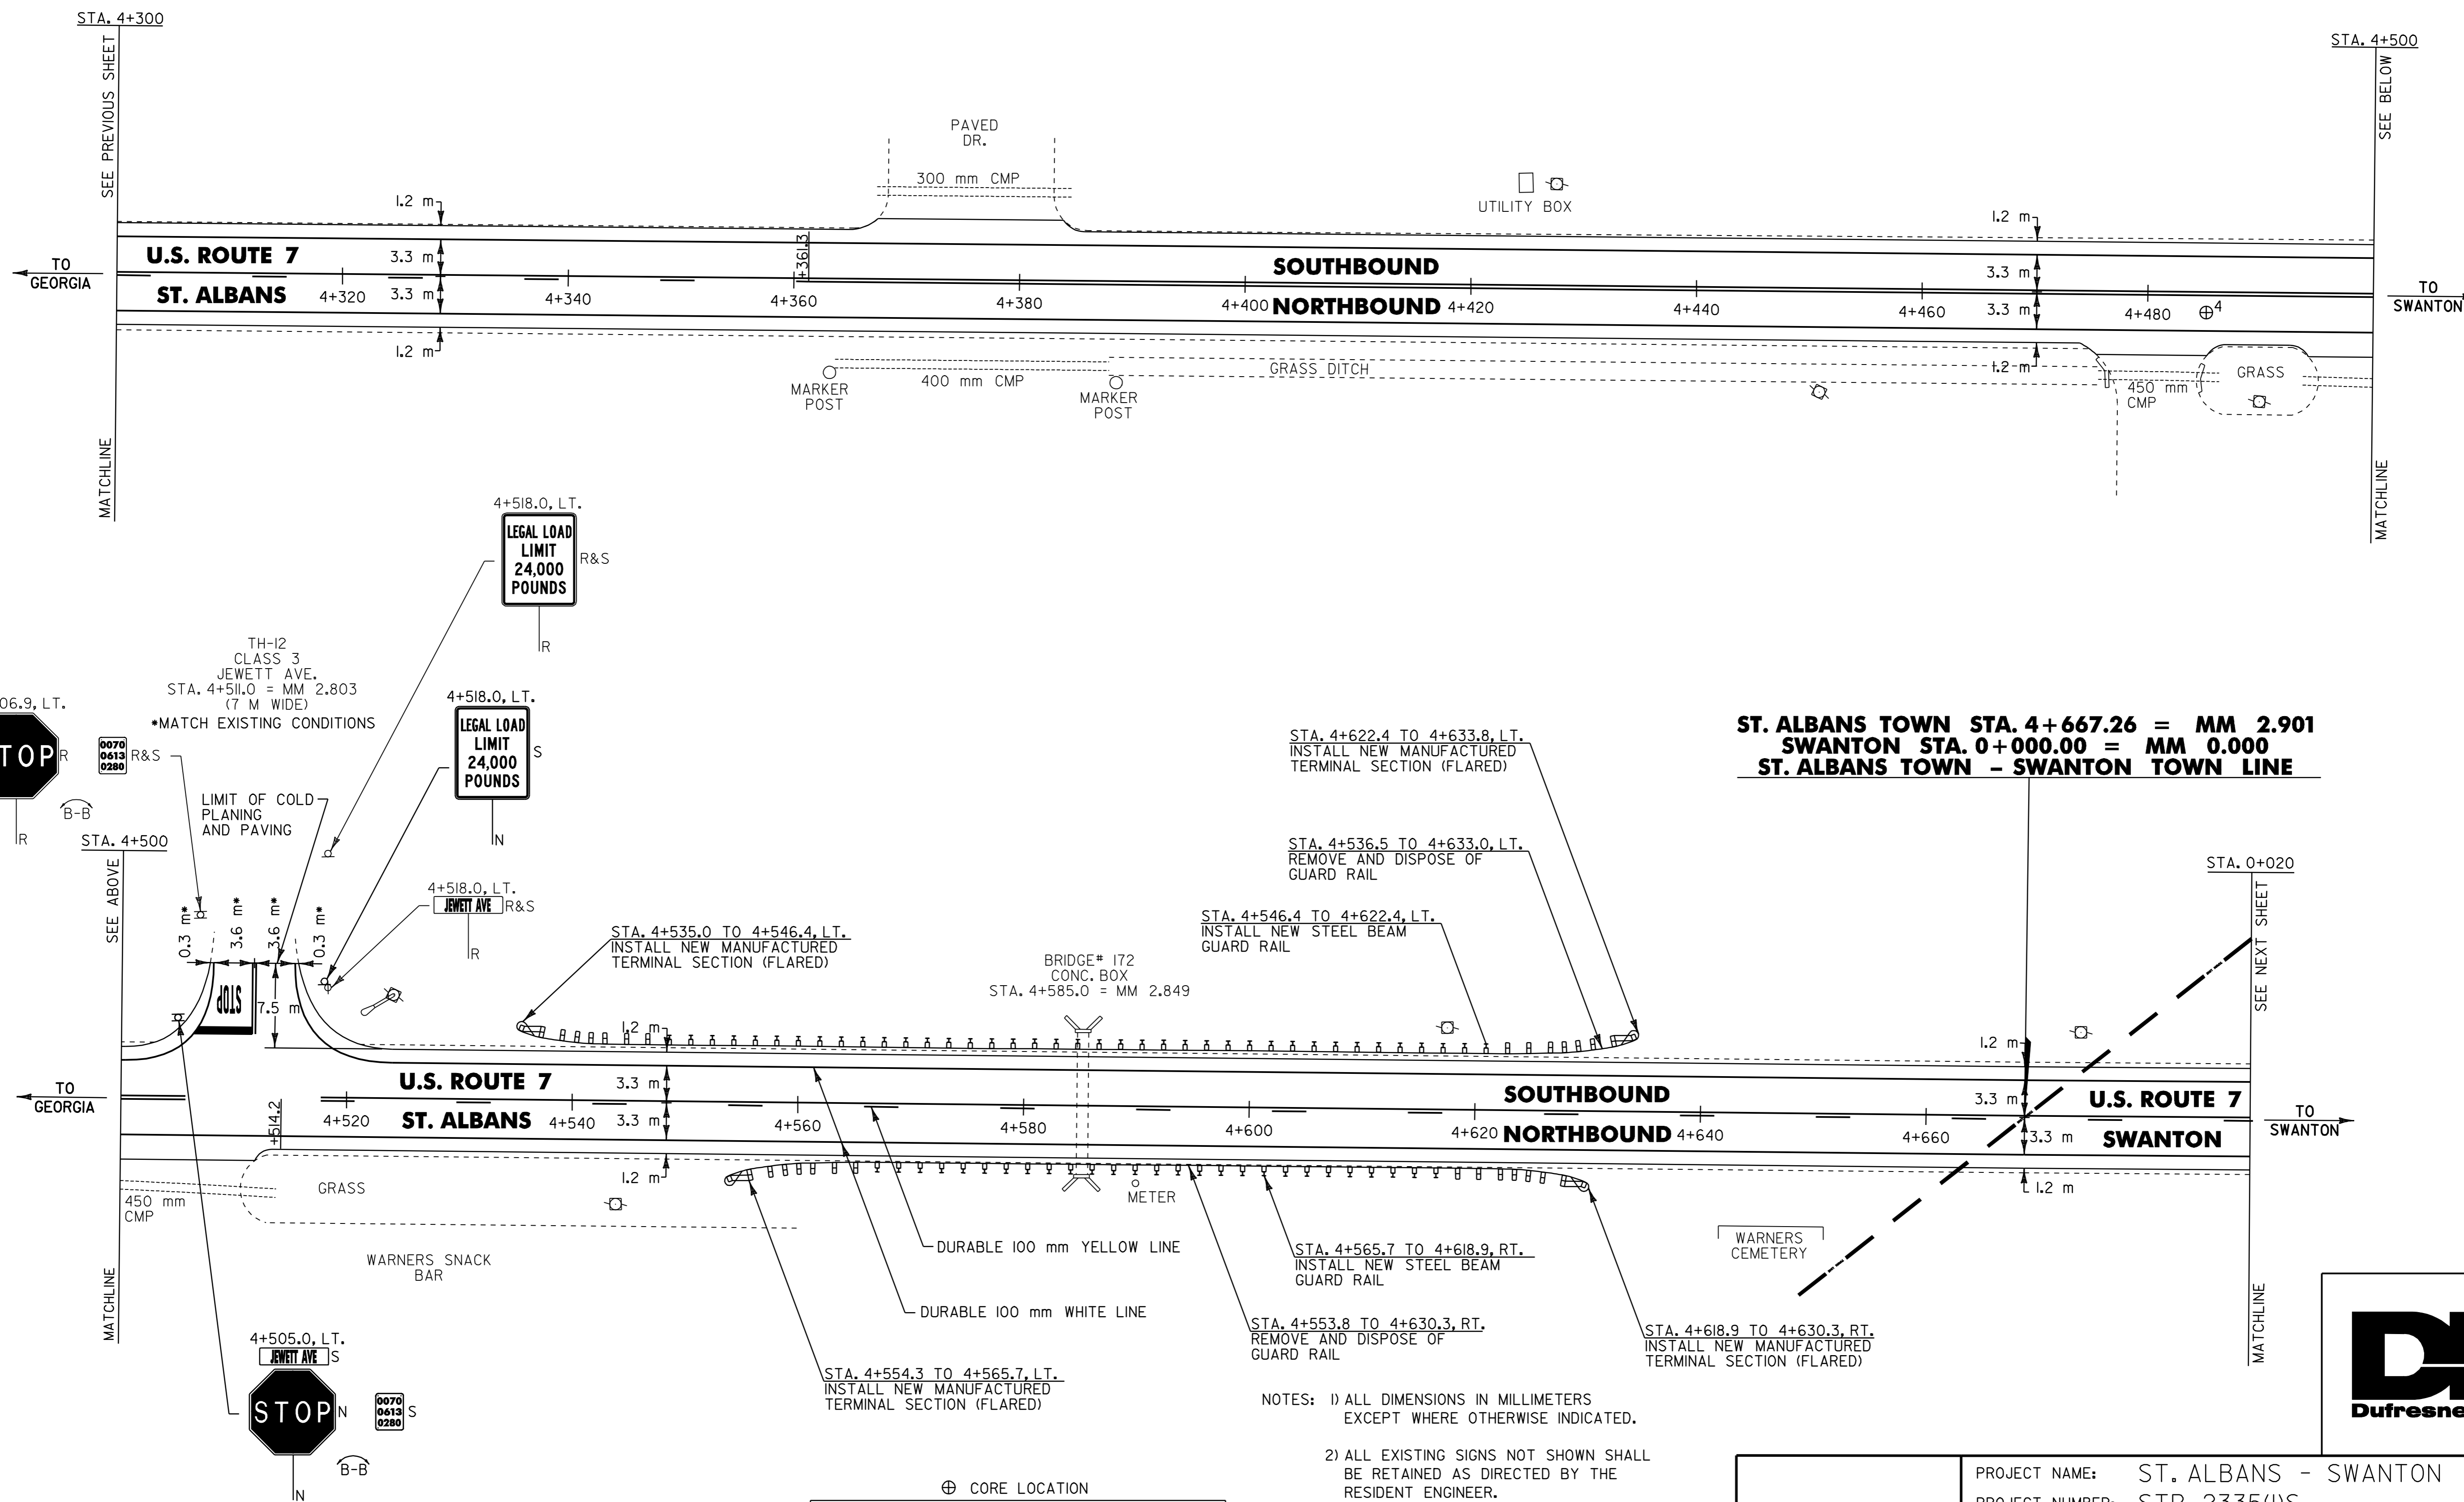

ST. ALBANS TOWN STA. 4+667.26 = MM 2.901
SWANTON STA. 0+000.00 = MM 0.000
ST. ALBANS TOWN - SWANTON TOWN LINE

- NOTES:
- 1) ALL DIMENSIONS IN MILLIMETERS EXCEPT WHERE OTHERWISE INDICATED.
 - 2) ALL EXISTING SIGNS NOT SHOWN SHALL BE RETAINED AS DIRECTED BY THE RESIDENT ENGINEER.
 - 3) FOR ANY TOWN HIGHWAY OR STREET DETAILS, SEE VTRANS STANDARDS E-12IM & E-193M.
 - 4) EW = EXISTING ROADWAY WIDTH.

⊕ CORE LOCATION

PAVEMENT CORE DATA			
CORE #	LOCATION	DEPTH (mm)	PCC
4	4+485.2, RT.	76	NO

LAYOUT SHEET #8	PROJECT NAME: ST. ALBANS - SWANTON	PLOT DATE: 16-SEP-2005
	PROJECT NUMBER: STP 2335(I)S	DRAWN BY: D-H
	FILE NAME: /pave/01c016/p01c016.dgn	CHECKED BY: D-H
	PROJECT LEADER: JLL DESIGNED BY: D-H IPARM FILE NAME: p01c016I08.I	SHEET 64 OF 89

