
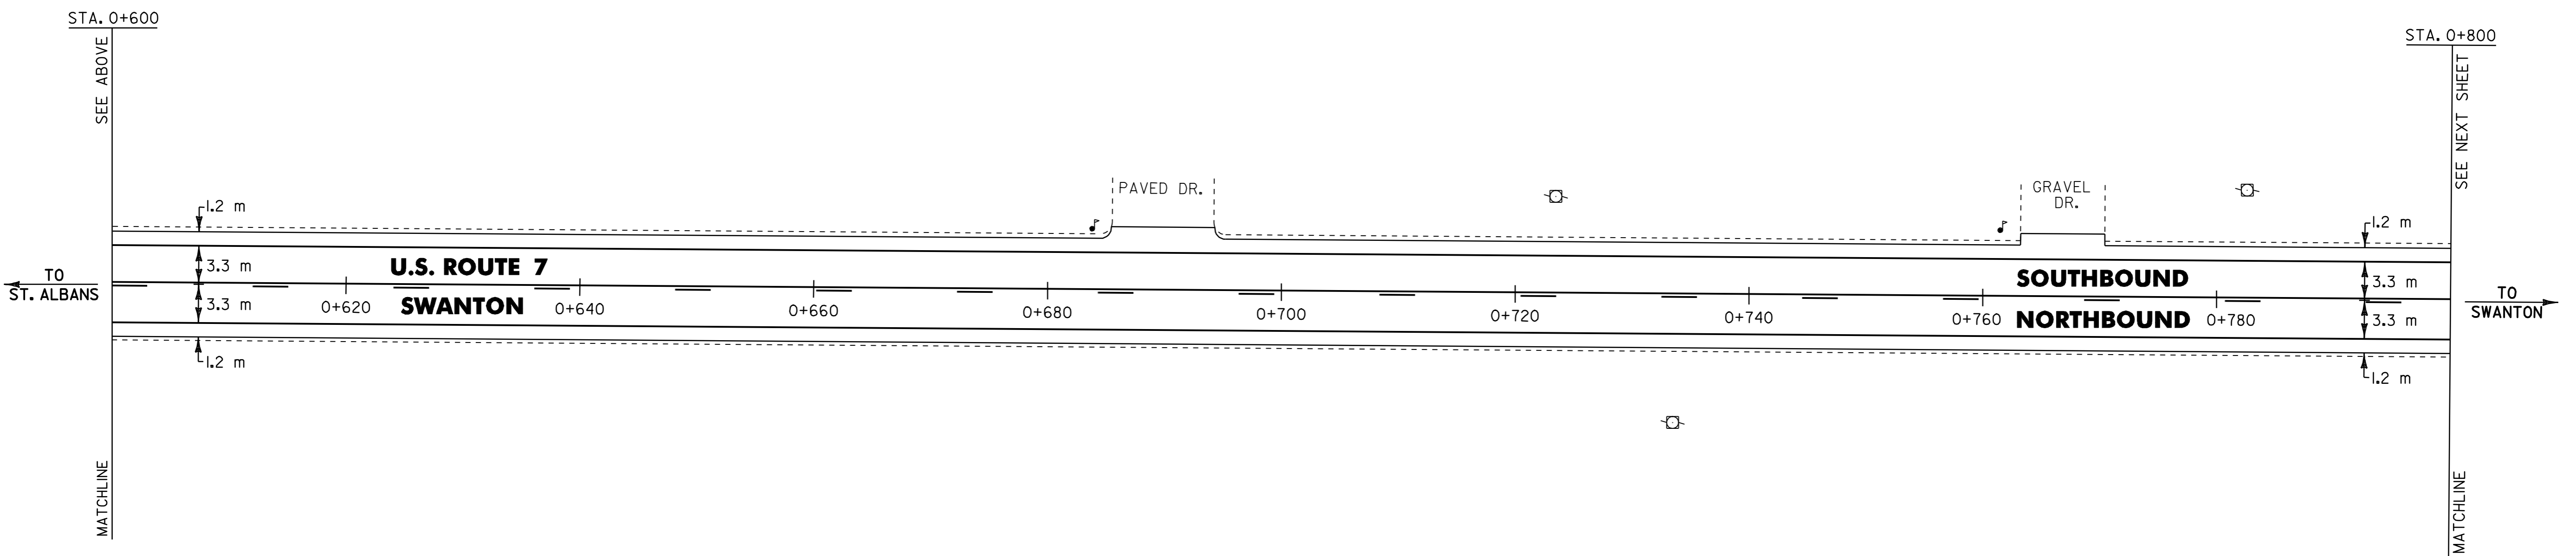


TEMPORARY & DURABLE 100 mm WHITE LINE  
 STA. 0+400.0 TO 0+800.0, SOLID LT. & RT.

TEMPORARY & DURABLE 100 mm YELLOW LINE  
 STA. 0+400.0 TO 0+498.9, DASHED LT./ SOLID RT.  
 STA. 0+498.9 TO 0+595.5, SOLID LT. & RT.  
 STA. 0+595.5 TO 0+800.0, SOLID LT./ DASHED RT.

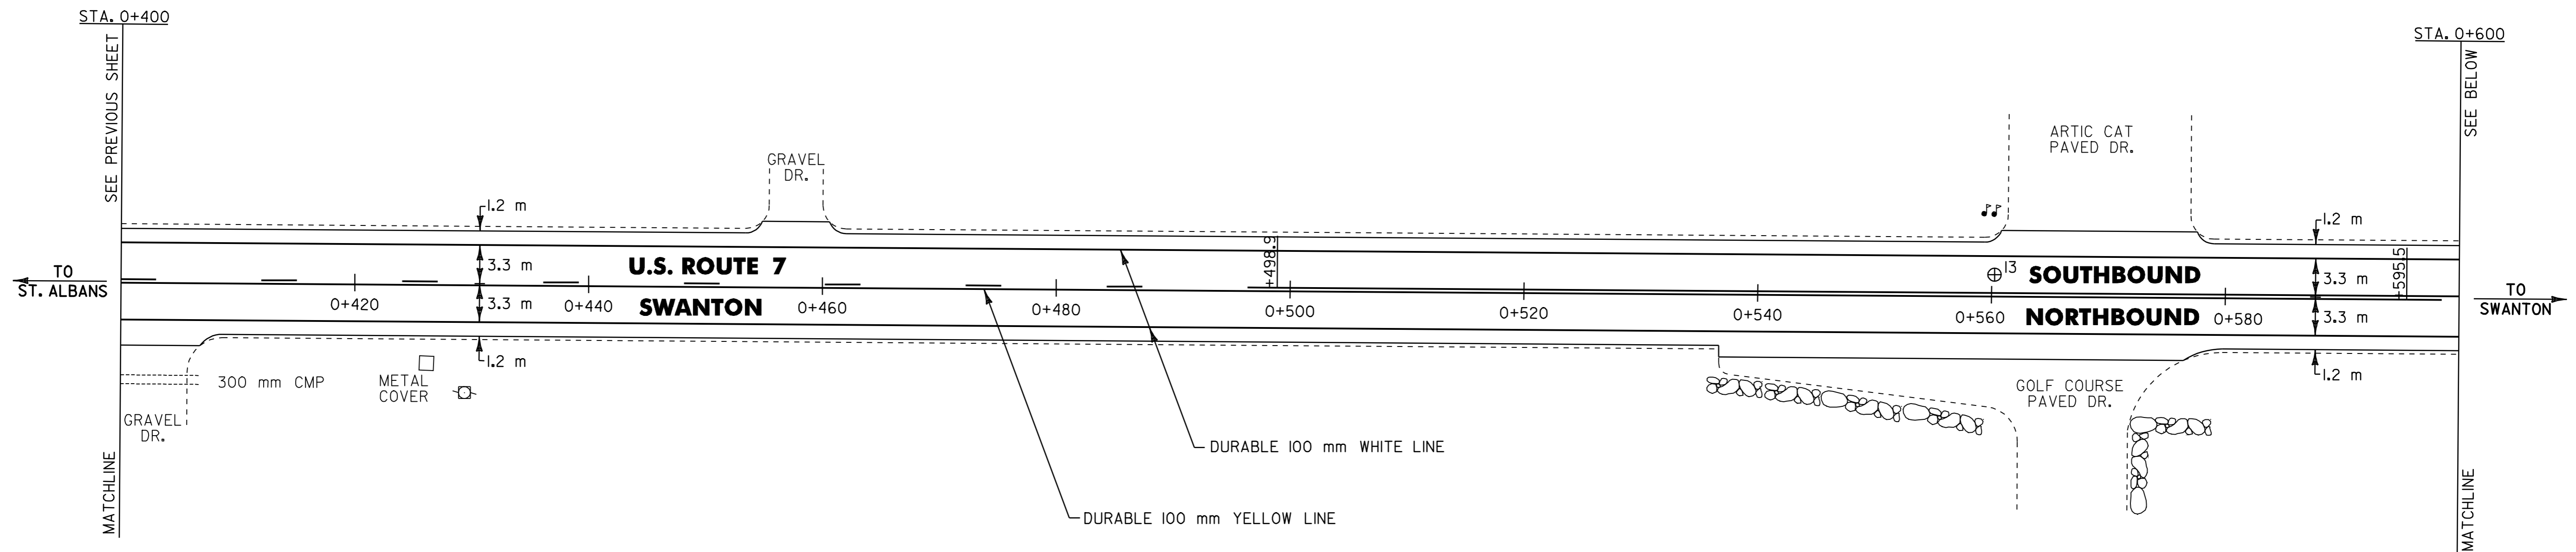

NOTES: 1) ALL DIMENSIONS IN MILLIMETERS EXCEPT WHERE OTHERWISE INDICATED.

2) ALL EXISTING SIGNS NOT SHOWN SHALL BE RETAINED AS DIRECTED BY THE RESIDENT ENGINEER.

3) FOR ANY TOWN HIGHWAY OR STREET DETAILS, SEE VTrans STANDARDS E-121M & E-193M.

4) EW = EXISTING ROADWAY WIDTH.

⊕ CORE LOCATION

PAVEMENT CORE DATA			
CORE #	LOCATION	DEPTH (mm)	PCC
I3	0+560.1, LT.	178	NO

LAYOUT SHEET #10

PROJECT NAME: ST. ALBANS - SWANTON  
 PROJECT NUMBER: STP 2335(I)S

FILE NAME: /pave/01c016/p01c016.dgn  
 PROJECT LEADER: JLL  
 DESIGNED BY: D-H  
 IPARM FILE NAME: p01c016i10.1

PLOT DATE: 16-SEP-2005  
 DRAWN BY: D-H  
 CHECKED BY: D-H  
 SHEET 66 OF 89

