
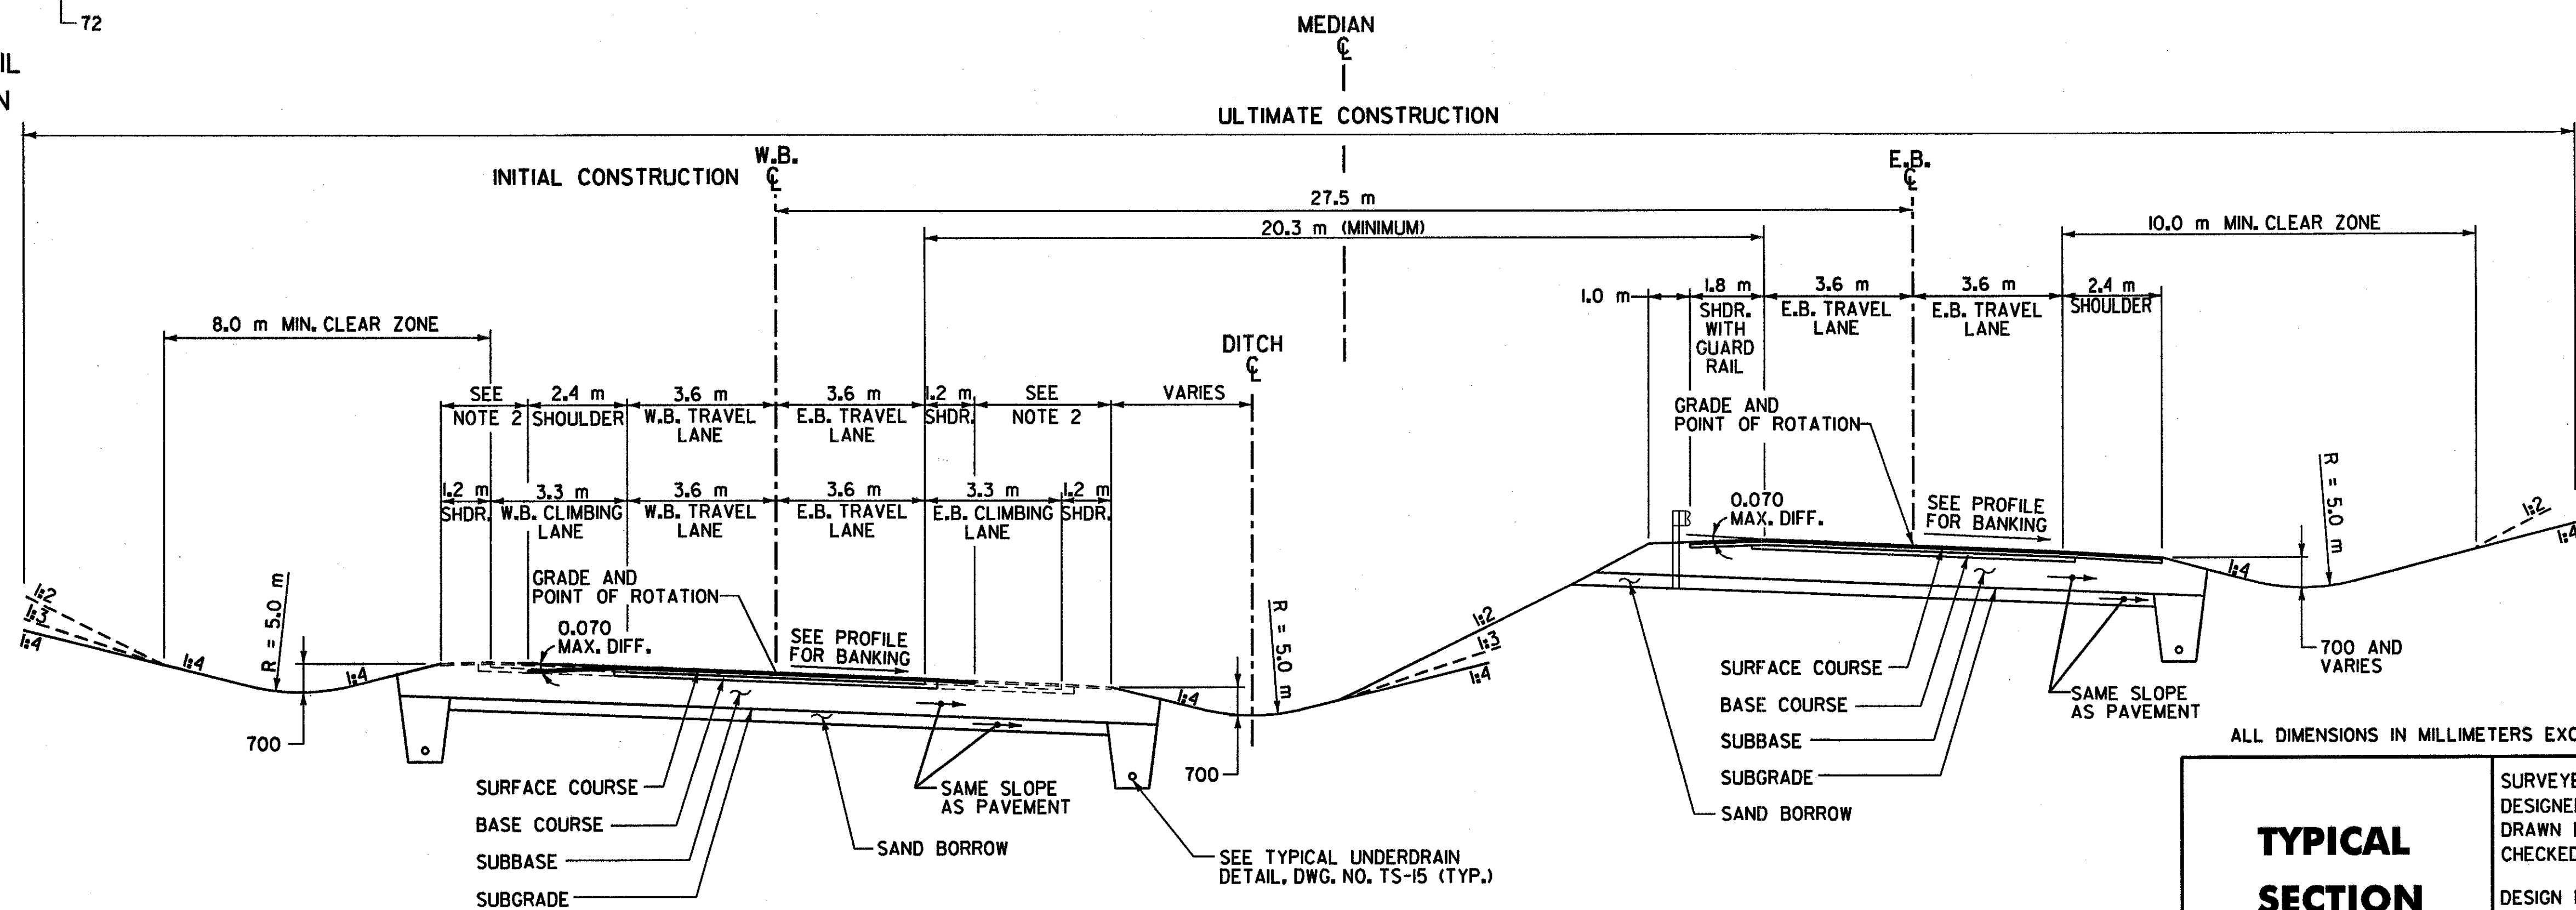
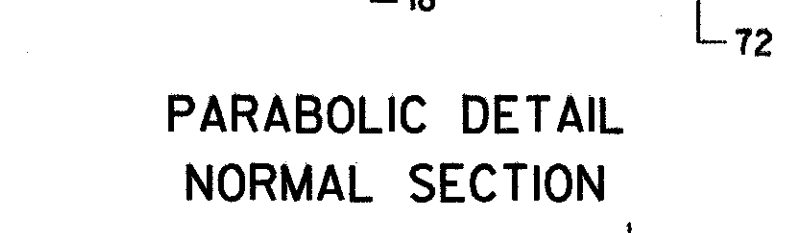


## TYPICAL SECTIONS - ULTIMATE CONSTRUCTION WITH CLIMBING LANE (INITIAL CONSTRUCTION)

MATERIAL ITEM	THICKNESS TOLERANCE	THICKNESS	DESCRIPTION
PAVEMENT COURSES (TOTAL DEPTH)	± 5	130	SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (50 TYPE III S, 80 TYPE II S)
BASE COURSES (TOTAL DEPTH)	± 10	100	BASE COURSE, SUPERPAVE BITUMINOUS CONCRETE (PG 58-28), TYPE 1 S
SUBBASE	± 30	600	SUBBASE OF CRUSHED GRAVEL (COARSE GRADED)
SAND BORROW	± 30	400	SAND BORROW
		SHOULDERS: 130	SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (50 TYPE III S, 80 TYPE II S)
		NOTE:	DESIGN FROST DEPTH - 1200

- NOTES:**
- ELIMINATE TOPSOIL AND SEEDING BEHIND GUARDRAIL TO SUBGRADE CATCH POINT.
  - FOR DETAILS OF INITIAL CONSTRUCTION TYPICAL SECTIONS, SEE DWG. NO. TS-3 TO DWG. NO. TS-16.
  - FOR ULTIMATE CONSTRUCTION, REMOVE PAVEMENT, TOPSOIL AND SEED.

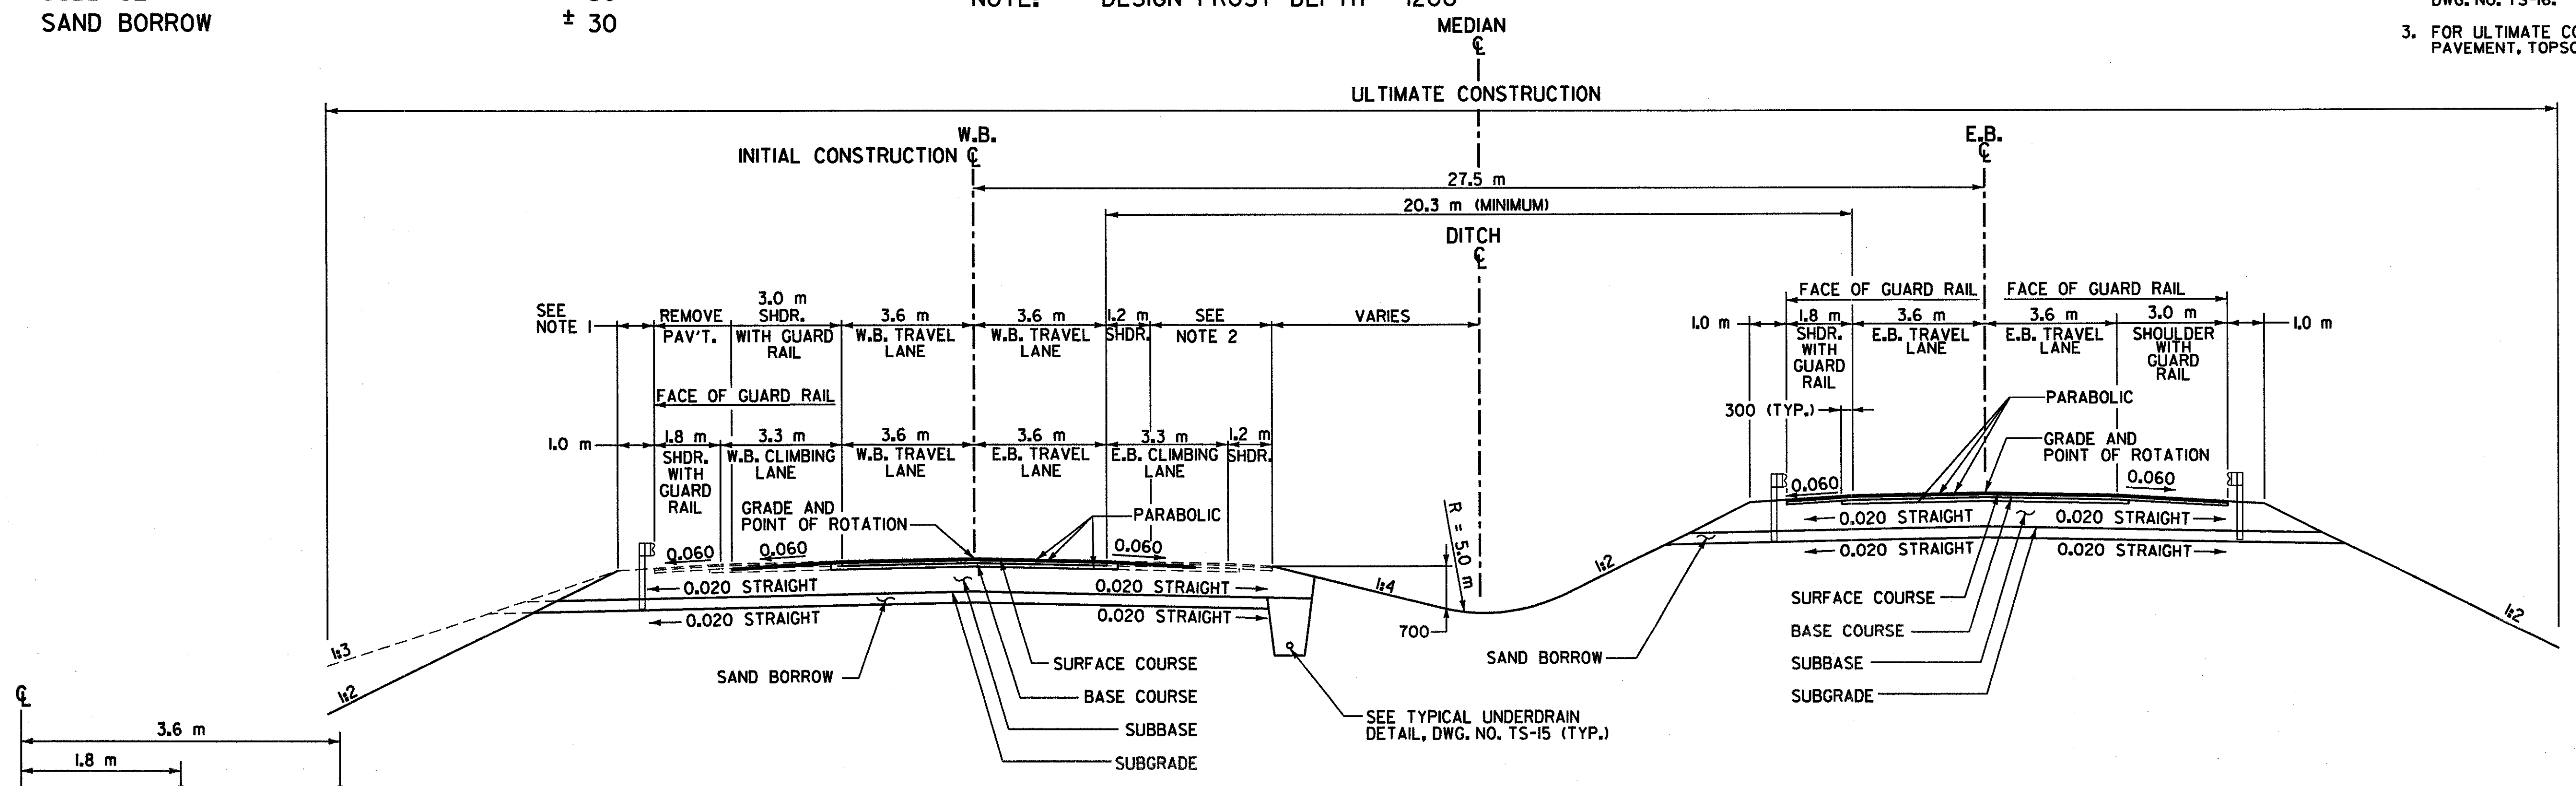

ALL DIMENSIONS IN MILLIMETERS EXCEPT WHERE OTHERWISE INDICATED.

<b>TYPICAL SECTION SHEET</b>	SURVEYED BY	C.H.A. & V.S.E.	DATE	12/93
	DESIGNED BY	D.E.G.	DATE	11/01
	DRAWN BY	J.N.	DATE	11/01
	CHECKED BY	T.P.K.	DATE	11/01
DESIGN FILE NO. /5116/VAOT/TS-2.DGN				
PROJ. NAME BENNINGTON - HOOSICK D.P.L. 0146(1) C/3				
PROJ. NO. P.L.N. 1306.60				
DWG No. TS-2 SHEET 50 OF 473				

FILE NAME = \\5116\VAOT\CONTRACT3\TS-2.DGN  
 DATE/TIME = 10/11/2001  
 USER = 664