


### TYPICAL SECTIONS - WESTBOUND CLIMBING LANE



MATERIAL ITEM	THICKNESS TOLERANCE
PAVEMENT COURSES (TOTAL DEPTH)	± 5
BASE COURSES (TOTAL DEPTH)	± 10
SUBBASE	± 30
SAND BORROW	± 30

- 130 SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (50 TYPE III S, 80 TYPE II S)
- 100 BASE COURSE, SUPERPAVE BITUMINOUS CONCRETE (PG 58-28), TYPE 1 S
- 600 SUBBASE OF CRUSHED GRAVEL (COARSE GRADED)
- 400 SAND BORROW
- SHOULDERS: 130 SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (50 TYPE III S, 80 TYPE II S)
- NOTE: DESIGN FROST DEPTH - 1200

- NOTES:
- EMBANKMENT HEIGHTS OF 5.0 m OR LESS SHALL BE SLOPED 1:4 WITHIN THE CLEAR ZONE AND 1:2 FROM OUTER LIMIT OF THE CLEAR ZONE TO MATCH THE EXISTING GROUND ELEVATION.
  - FOR SLOPES IN SOLID ROCK EXCAVATION AND DRILLING AND BLASTING OF SOLID ROCK SUBGRADE, SEE STANDARD SHEET A-60M.

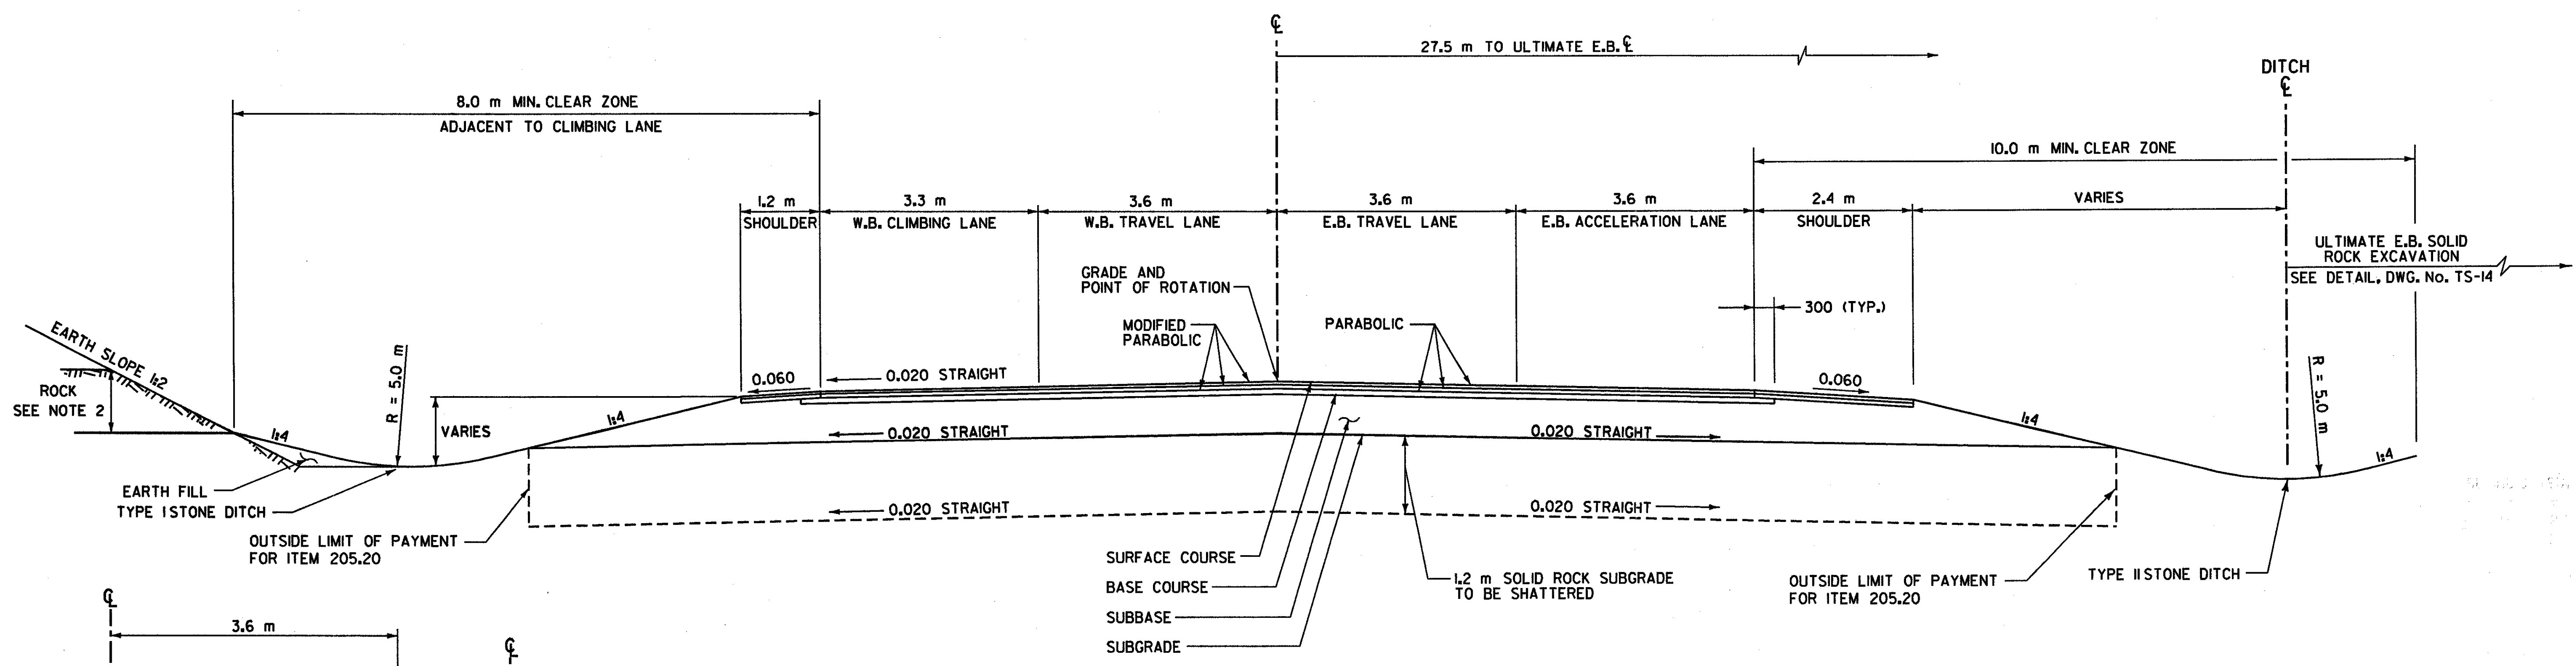

**NORMAL SECTION**  
**STA. 13 + 632.000 - STA. 13 + 760.000**

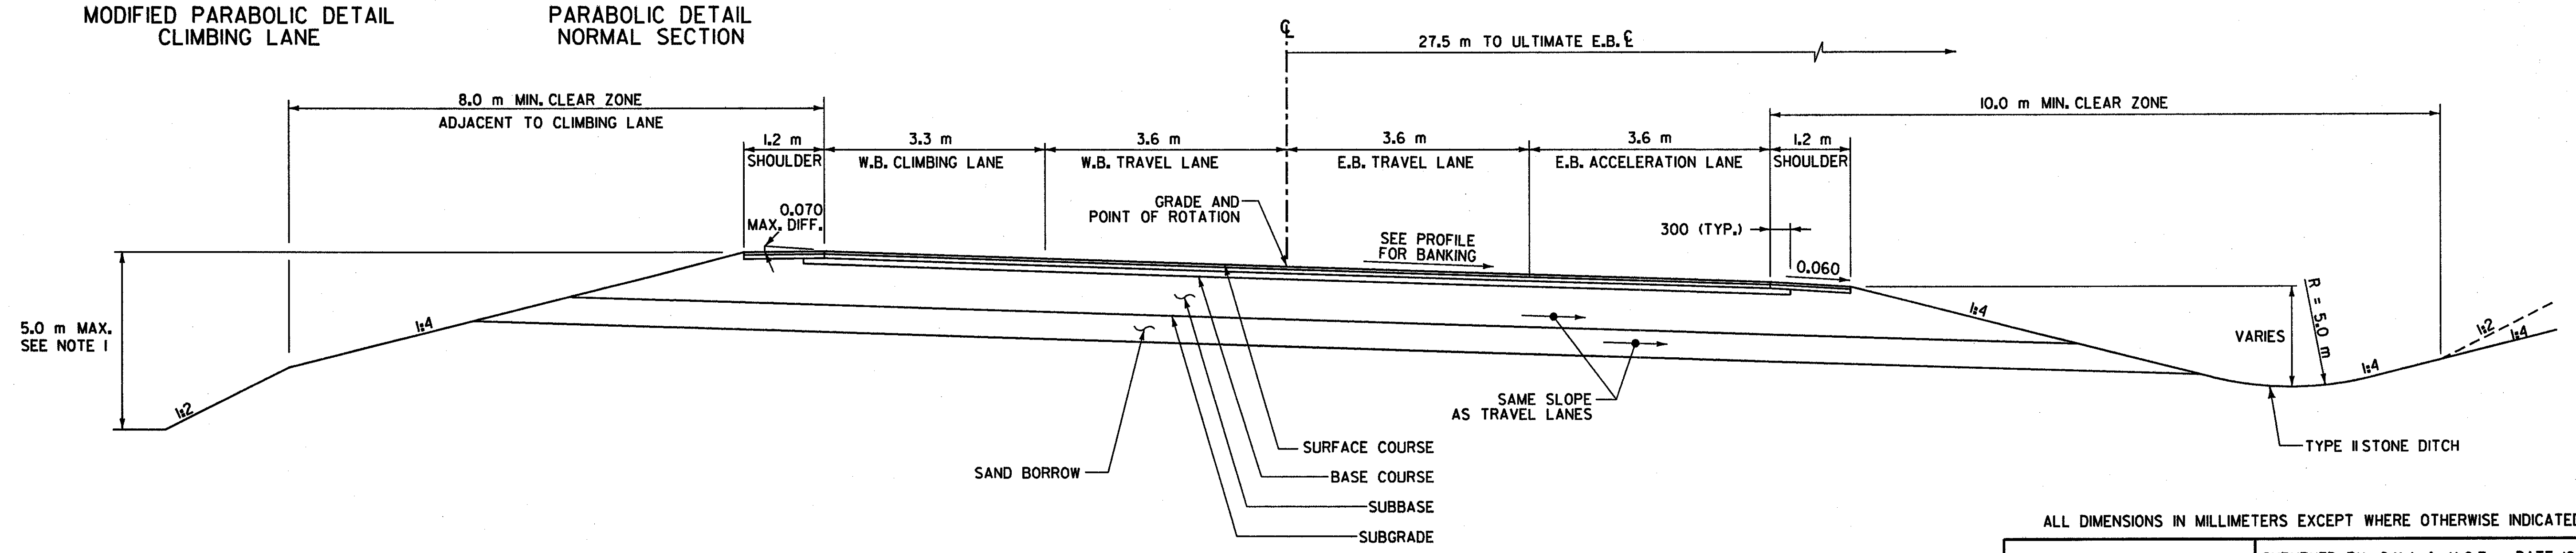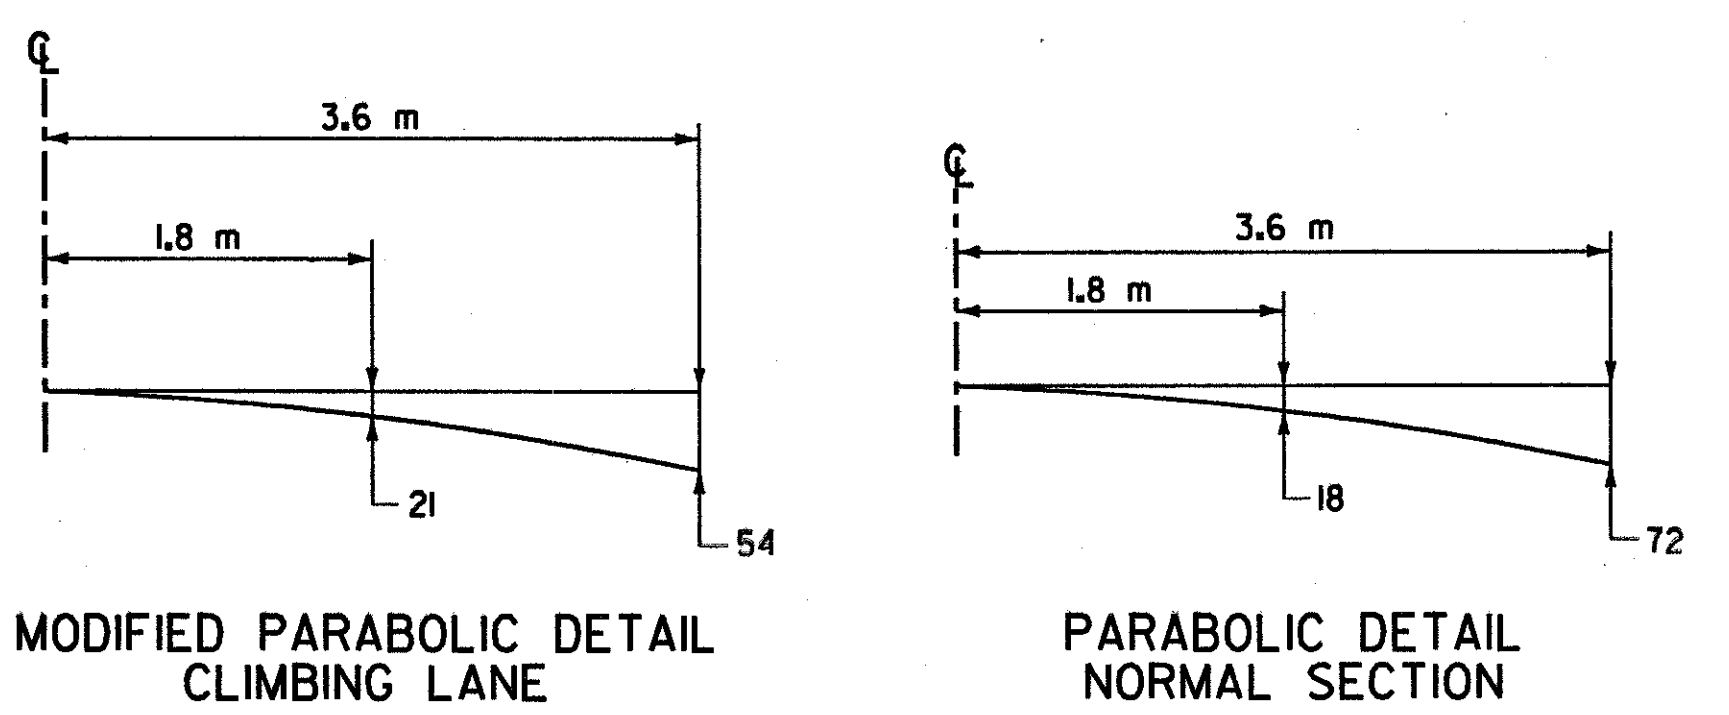

**BANKED SECTION**  
**STA. 13 + 540.000 - STA. 13 + 632.000**

ALL DIMENSIONS IN MILLIMETERS EXCEPT WHERE OTHERWISE INDICATED.

TYPICAL SECTION SHEET	
SURVEYED BY	C.H.A. & V.S.E. DATE 12/93
DESIGNED BY	D.E.G. DATE 11/01
DRAWN BY	J.N. DATE 11/01
CHECKED BY	T.P.K. DATE 11/01
DESIGN FILE NO.	/5116/VAOT/TS-6 DGN
PROJ. NAME	BENNINGTON - HOOSICK D.P.I. 0146(1) C/3
PROJ. NO.	P.I.N. 1306.60
DWG No. TS-6	SHEET 54 OF 473

FILE NAME = c:\v5116\VAOT\CONTRACT3\TS-6.dgn  
 DATE/TIME = 10/11/2001  
 USER = 664