


TYPICAL SECTIONS - INITIAL CONSTRUCTION

MATERIAL ITEM	THICKNESS	TOLERANCE
PAVEMENT COURSES (TOTAL DEPTH)	± 5	
BASE COURSES (TOTAL DEPTH)	± 10	
SUBBASE	± 30	
SAND BORROW	± 30	


130	SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (50 TYPE III S, 80 TYPE II S)
100	BASE COURSE, SUPERPAVE BITUMINOUS CONCRETE (PG 58-28), TYPE I S
400	SUBBASE OF CRUSHED GRAVEL (COARSE GRADED)
SHOULDERS:	400 SAND BORROW
130	SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (50 TYPE III S, 80 TYPE II S)
NOTE:	DESIGN FROST DEPTH - 1200

NOTE:
1. ELIMINATE SEEDING BEHIND GUARDRAIL TO SUBGRADE CATCH POINT.

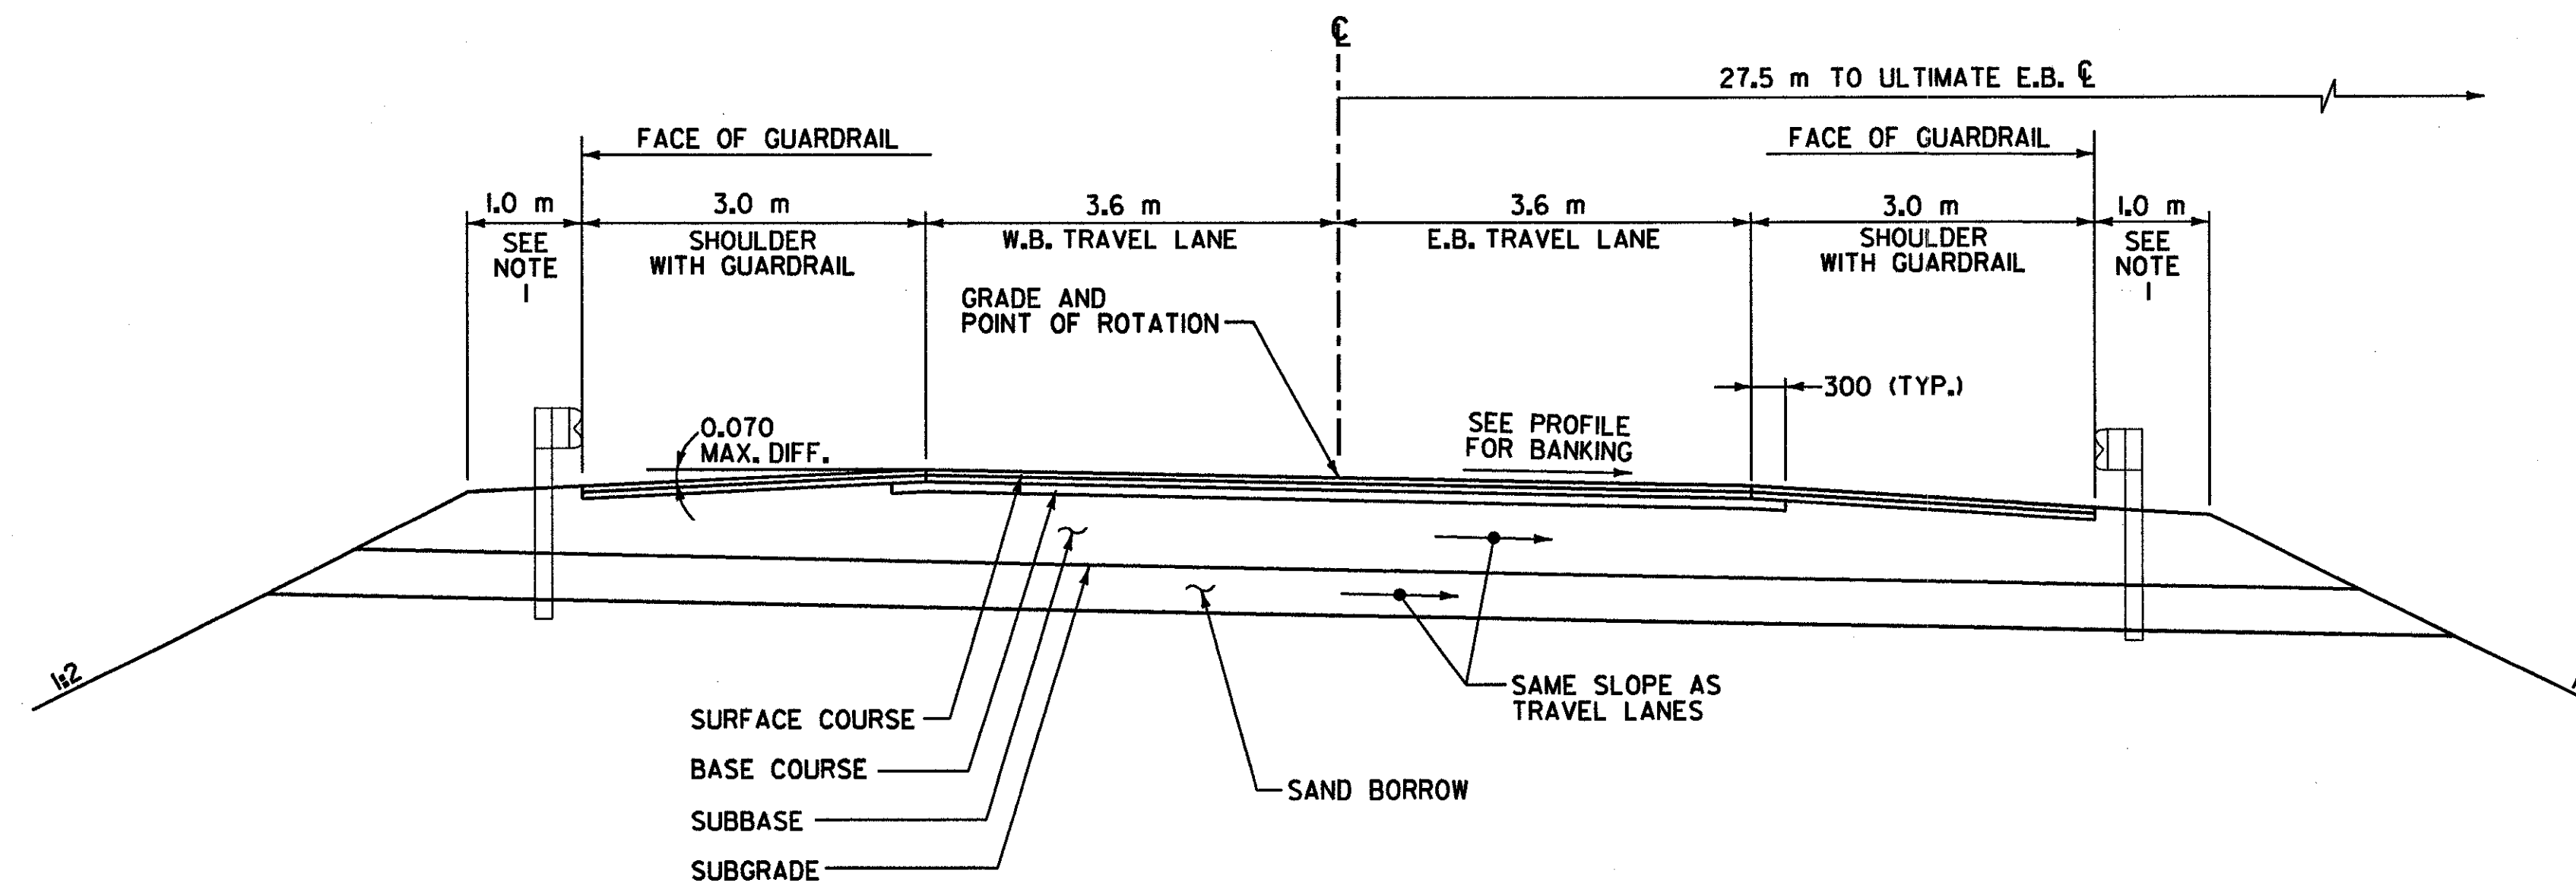

BANKED SECTION

STA. 14 + 540.000 - STA. 14 + 855.650
STA. 14 + 916.100 - STA. 15 + 149.509

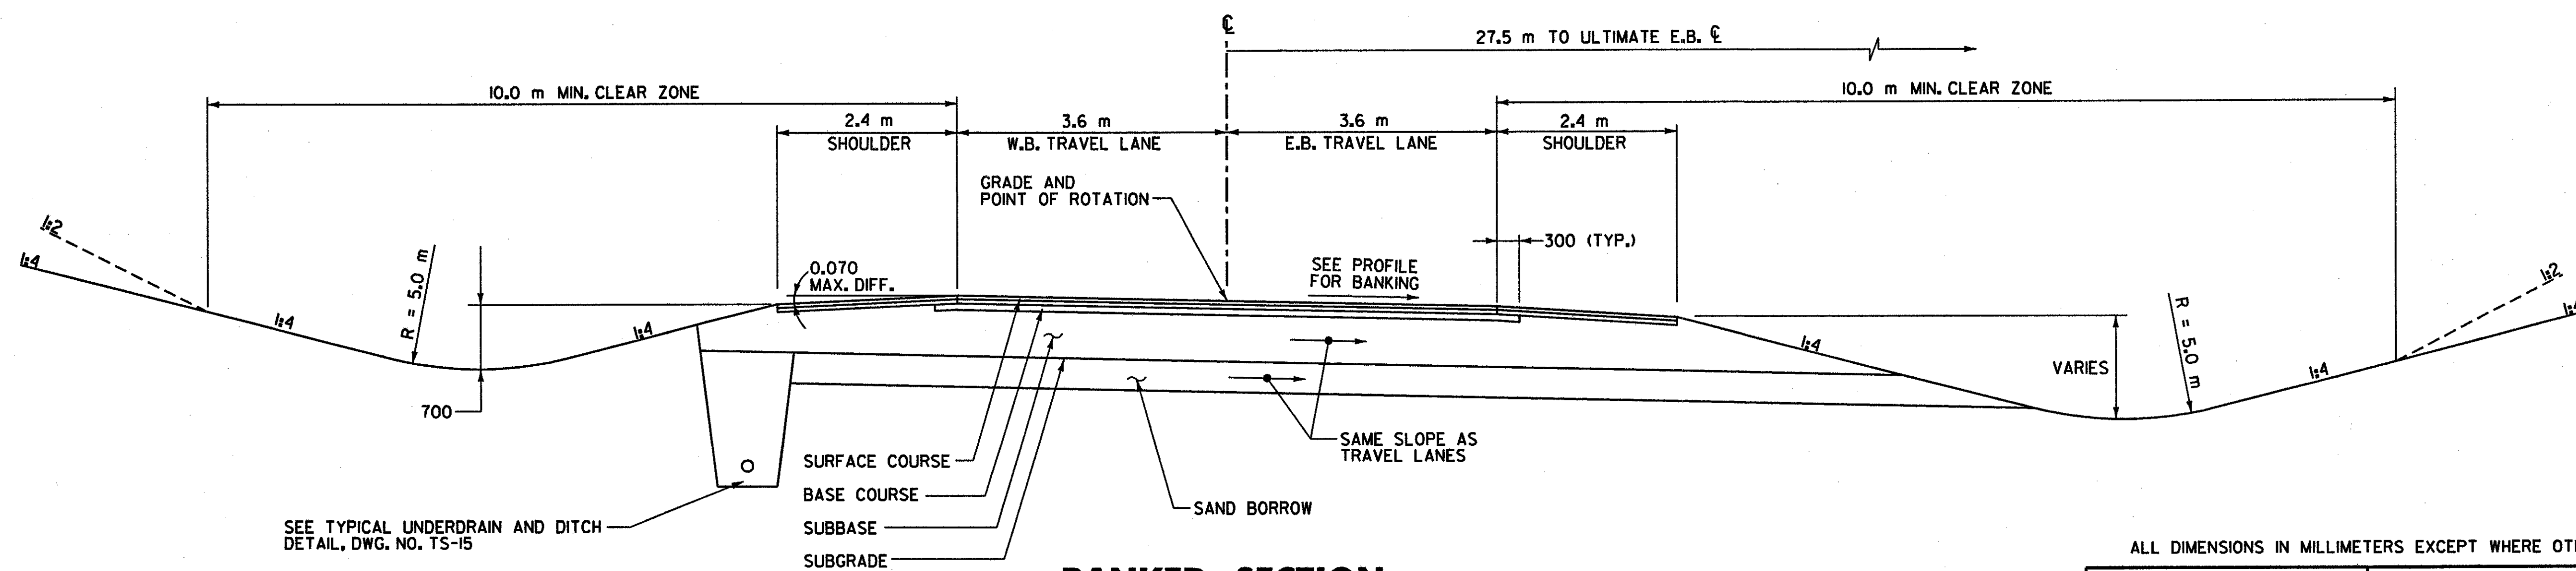

BANKED SECTION

STA. 14 + 334.000 - STA. 14 + 540.000

ALL DIMENSIONS IN MILLIMETERS EXCEPT WHERE OTHERWISE INDICATED.

TYPICAL SECTION SHEET

SURVEYED BY	C.H.A. & V.S.E.	DATE	12/93
DESIGNED BY	D.E.G.	DATE	11/01
DRAWN BY	J.N.	DATE	11/01
CHECKED BY	T.P.K.	DATE	11/01
DESIGN FILE NO.	/5116/VAOT/TS-8.DGN		
PROJ. NAME	BENNINGTON - HOOSICK D.P.I. 0146(1) C/3		
PROJ. NO.	P.I.N. 1306.60		
DWG No. TS-8	SHEET 56 OF 473		