


### TYPICAL SECTIONS - INTIAL CONSTRUCTION

MATERIAL ITEM	THICKNESS	TOLERANCE
PAVEMENT COURSES (TOTAL DEPTH)	± 5	
BASE COURSES (TOTAL DEPTH)	± 10	
SUBBASE	± 30	
SAND BORROW	± 30	

	130	SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (50 TYPE III S, 80 TYPE II S)
	100	BASE COURSE, SUPERPAVE BITUMINOUS CONCRETE (PG 58-28), TYPE I S
	600	SUBBASE OF CRUSHED GRAVEL (COARSE GRADED)
	400	SAND BORROW
SHOULDERS:	130	SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (50 TYPE III S, 80 TYPE II S)
NOTE:		DESIGN FROST DEPTH - I200

NOTE:  
I. ELIMINATE TOPSOIL AND SEEDING BEHIND GUARDRAIL TO SUBGRADE CATCH POINT.

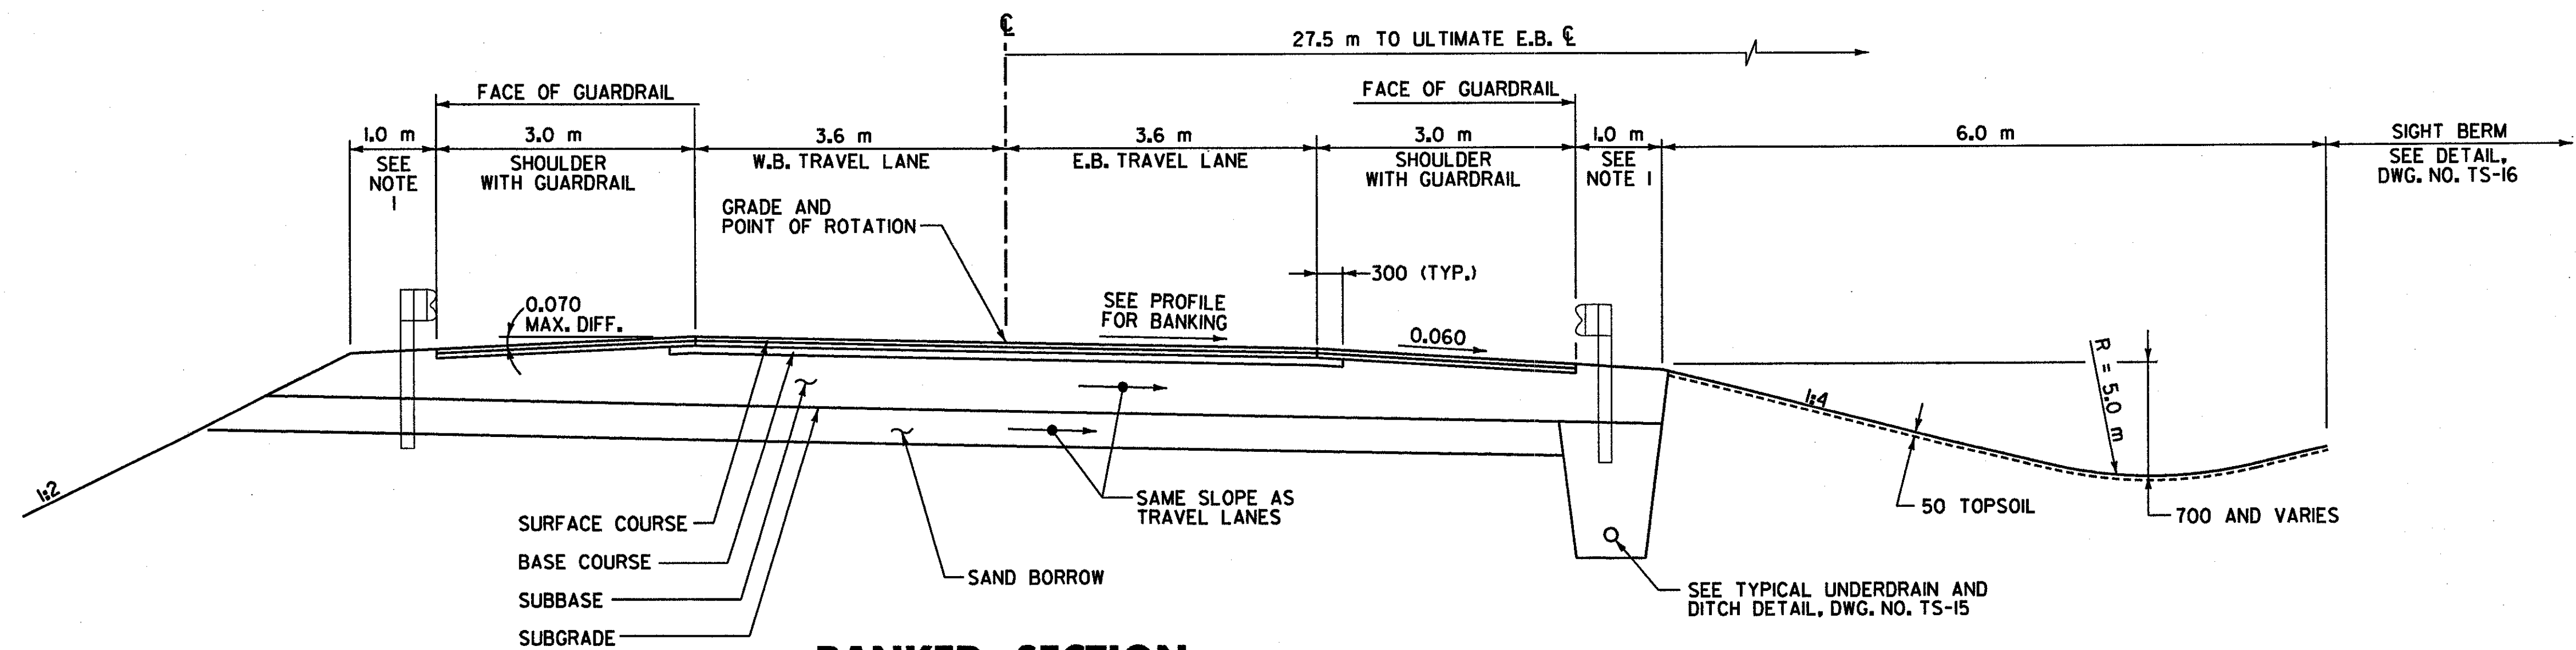

**BANKED SECTION**  
**STA. 15+194.392 - STA. 15+280.000**

ALL DIMENSIONS IN MILLIMETERS EXCEPT WHERE OTHERWISE INDICATED.

### TYPICAL SECTION SHEET

SURVEYED BY	C.H.A. & V.S.E.	DATE	12/93
DESIGNED BY	D.E.G.	DATE	11/01
DRAWN BY	J.N.	DATE	11/01
CHECKED BY	T.P.K.	DATE	11/01
DESIGN FILE NO.	5116/VAOT/VT-9.DGN		
PROJ. NAME	BENNINGTON - HOOSICK D.P.L. 0146(1) C/3		
PROJ. NO.	P.I.N. 1306.60		
DWG No. TS-9	SHEET 57 OF 473		