



### TYPICAL SECTIONS - WESTBOUND CLIMBING LANE

MATERIAL ITEM	THICKNESS TOLERANCE	THICKNESS	DESCRIPTION
PAVEMENT COURSES (TOTAL DEPTH)	± 5	130	SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (50 TYPE III S, 80 TYPE II S)
BASE COURSES (TOTAL DEPTH)	± 10	100	BASE COURSE, SUPERPAVE BITUMINOUS CONCRETE (PG 58-28), TYPE 1S
SUBBASE	± 30	600	SUBBASE OF CRUSHED GRAVEL (COARSE GRADED)
SAND BORROW	± 30	400	SAND BORROW
		SHOULDERS: 130	SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (50 TYPE III S, 80 TYPE II S)
		NOTE:	DESIGN FROST DEPTH - 1200

NOTE:  
 1. ELIMINATE TOPSOIL (NEAR SIGHT BERM) AND SEEDING BEHIND GUARDRAIL TO SUBGRADE CATCH POINT.

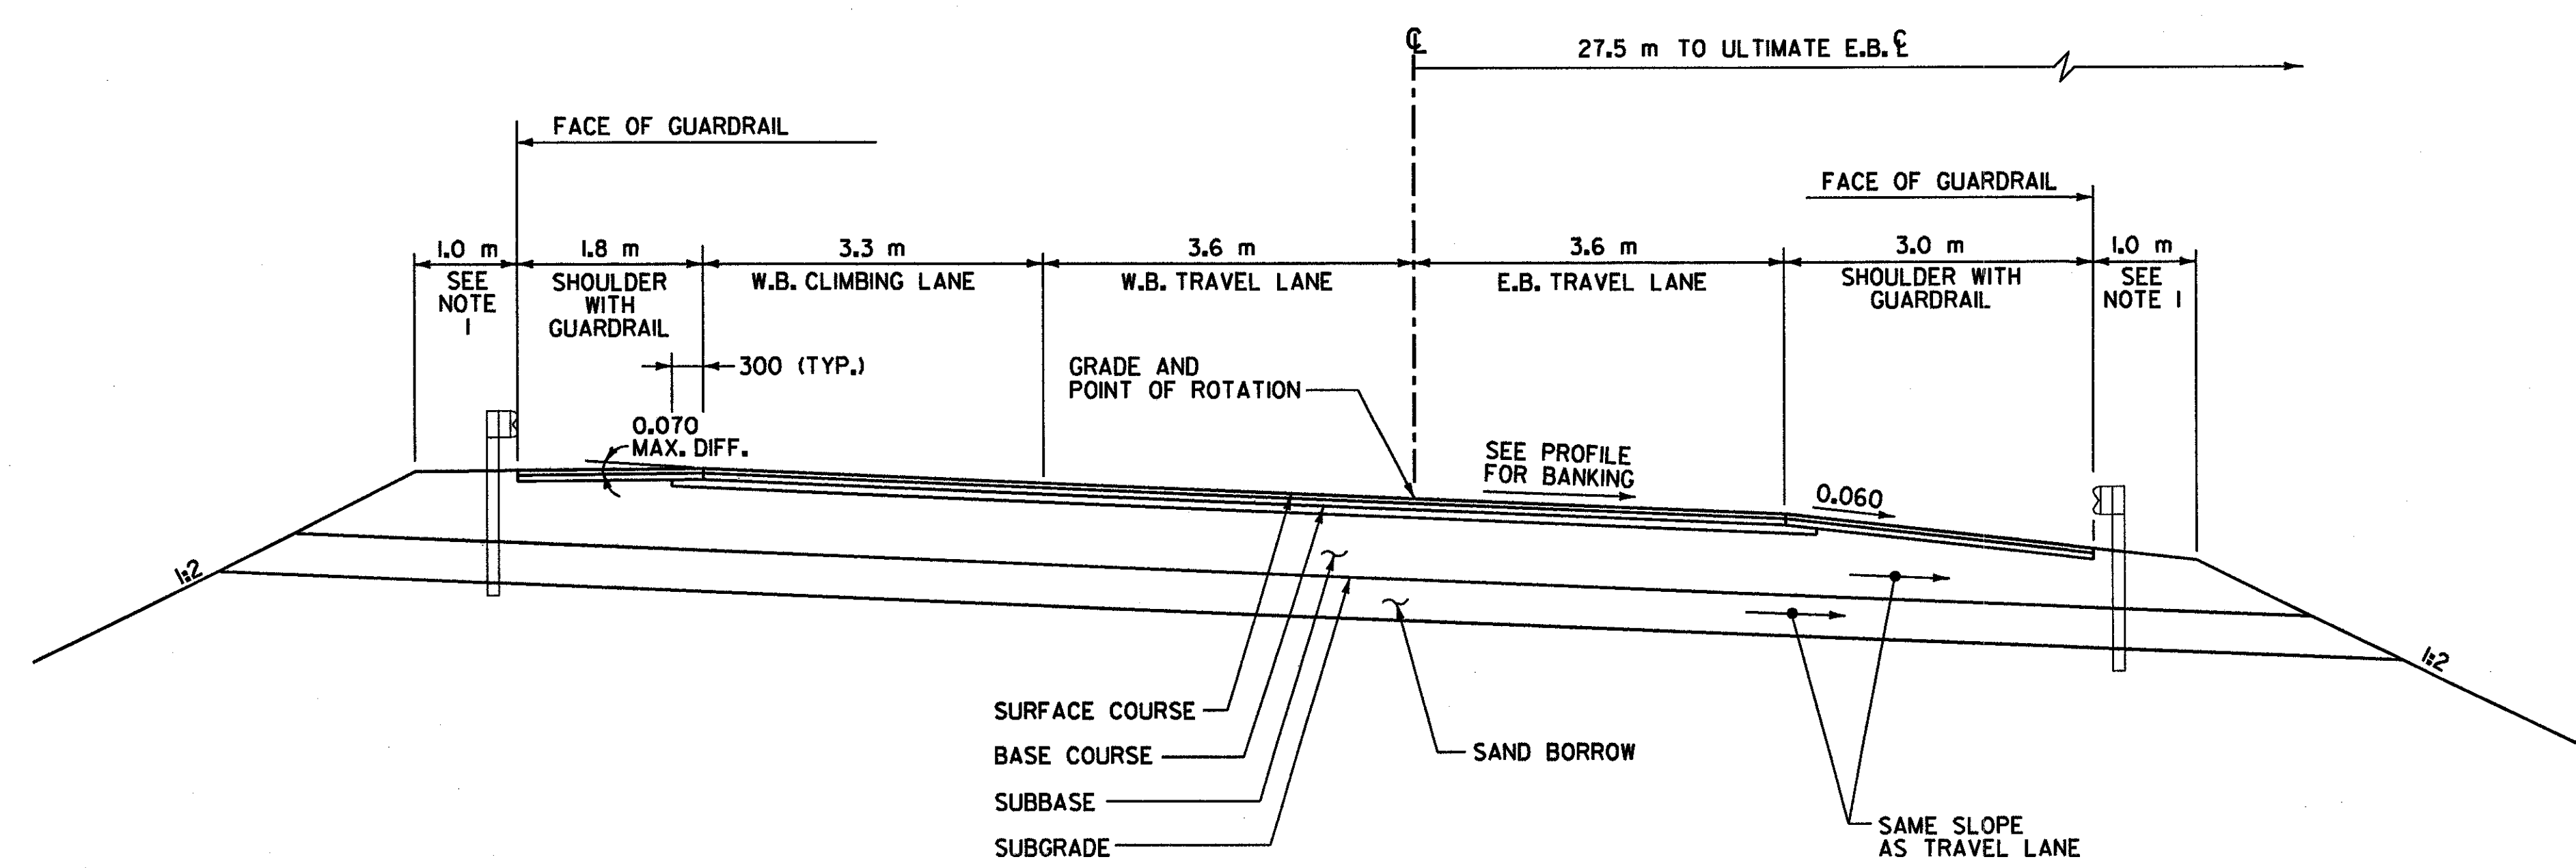

**BANKED SECTION**  
**STA. 15 + 480.000 - STA. 15 + 620.000**

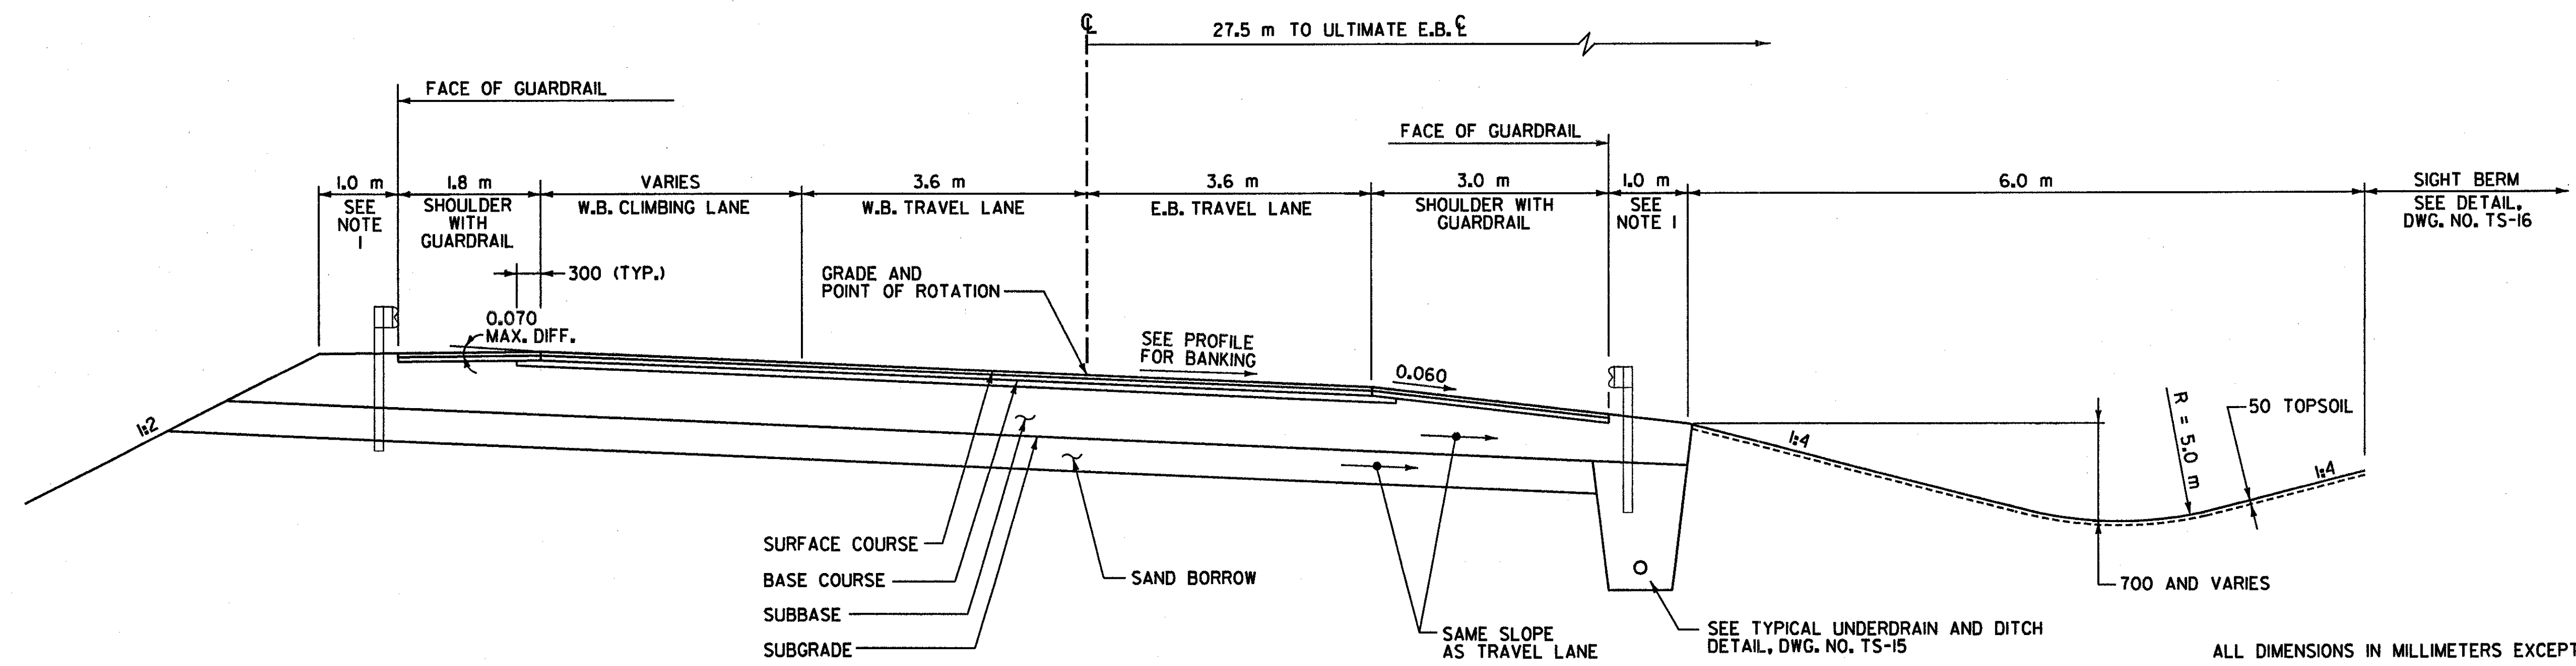

**BANKED SECTION**  
**STA. 15 + 280.000 - STA. 15 + 480.000**

ALL DIMENSIONS IN MILLIMETERS EXCEPT WHERE OTHERWISE INDICATED.

FILE NAME = c:\5116\VAOT\CONTRACT3\TS-10.dgn  
 DATE/TIME = 10/11/2001  
 USER = 664

<b>TYPICAL SECTION SHEET</b>	SURVEYED BY	C.H.A. & V.S.E.	DATE	12/93
	DESIGNED BY	D.E.G.	DATE	11/01
	DRAWN BY	J.N.	DATE	11/01
	CHECKED BY	T.P.K.	DATE	11/01
	DESIGN FILE NO.	5116/VAOT/TS-10.DGN		
PROJ. NAME	BENNINGTON - HOOSICK D.P.L. 0146(i) C/3			
PROJ. NO.	P.I.N. 1306.60			
DWG No.	TS-10	SHEET	58 OF 473	