


TYPICAL SECTIONS - WESTBOUND CLIMBING LANE


MATERIAL ITEM	THICKNESS TOLERANCE	THICKNESS	DESCRIPTION
PAVEMENT COURSES (TOTAL DEPTH)	± 5	130	SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (50 TYPE III S, 80 TYPE II S)
BASE COURSES (TOTAL DEPTH)	± 10	100	BASE COURSE, SUPERPAVE BITUMINOUS CONCRETE (PG 58-28), TYPE I S
SUBBASE	± 30	600	SUBBASE OF CRUSHED GRAVEL (COARSE GRADED)
SAND BORROW	± 30	400	SAND BORROW
		130	SHOULDERS: SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (50 TYPE III S, 80 TYPE II S)
		NOTE:	DESIGN FROST DEPTH - 1200

NOTES:

- ELIMINATE SEEDING BEHIND GUARDRAIL TO SUBGRADE CATCH POINT.
- EMBANKMENT HEIGHTS OF 5.0 m OR LESS SHALL BE SLOPED 1:4 WITHIN THE CLEAR ZONE AND 1:2 FROM OUTER LIMIT OF THE CLEAR ZONE TO MATCH THE EXISTING GROUND ELEVATION.

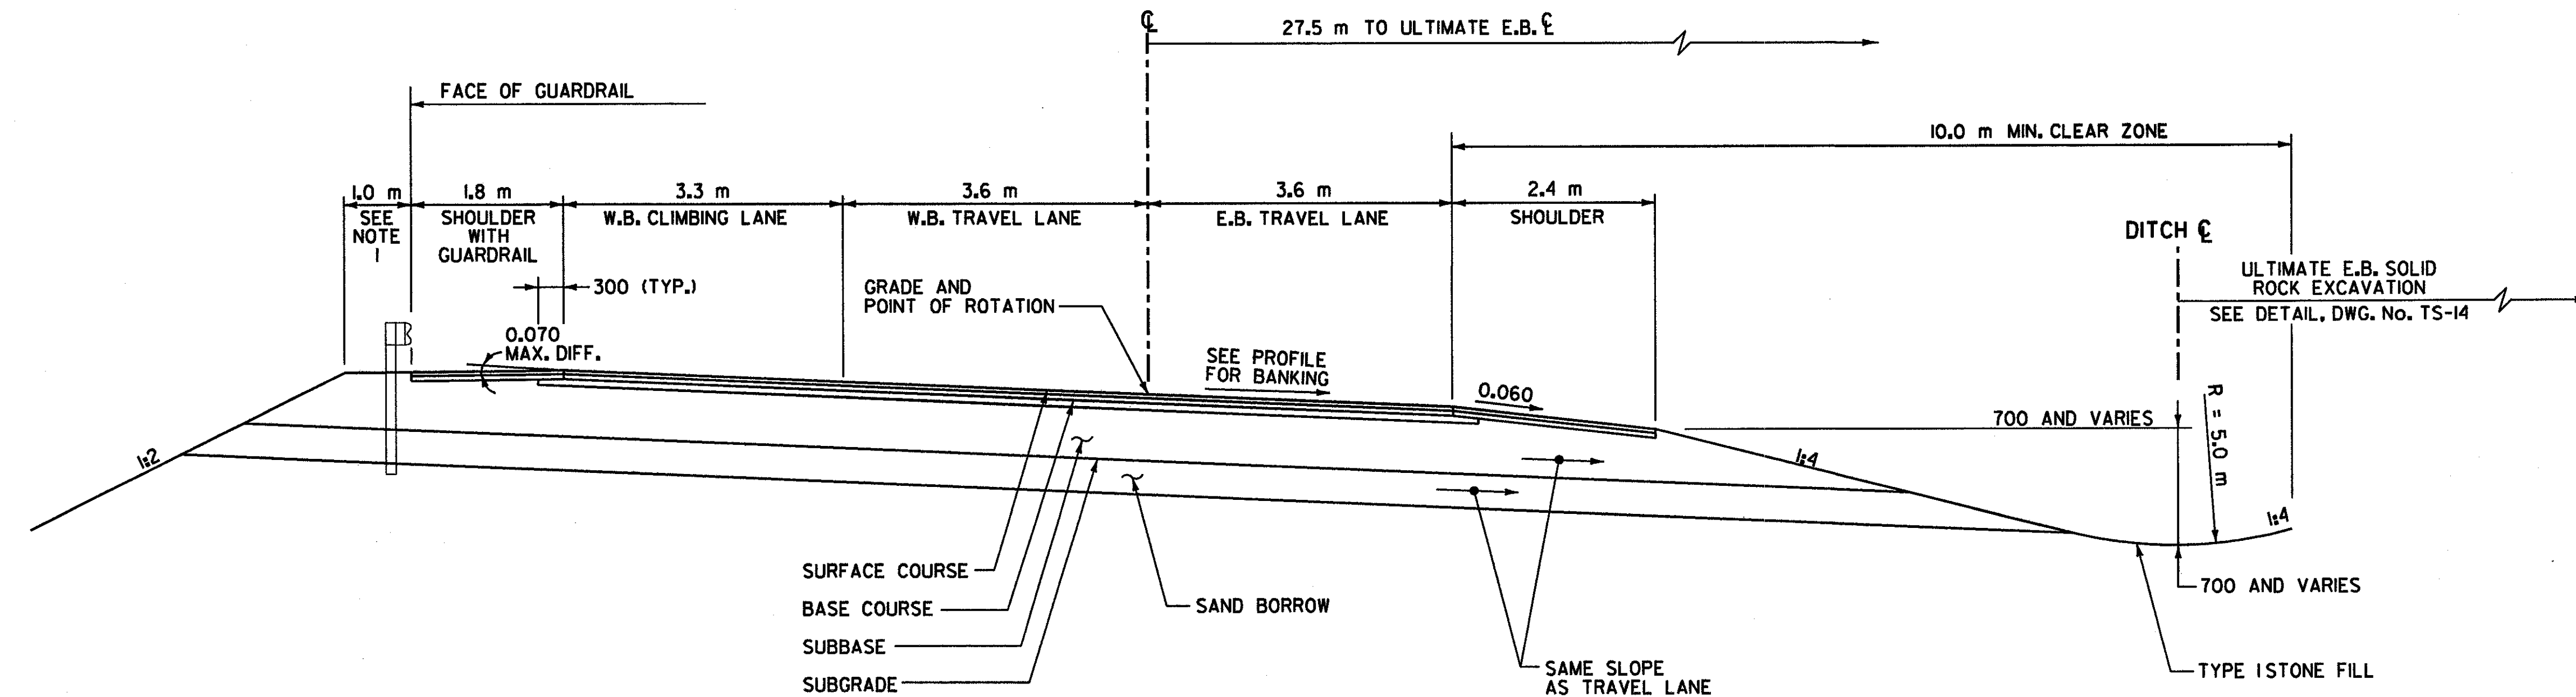

**BANKED SECTION
STA. 16+160.000 - STA. 16+400.000**

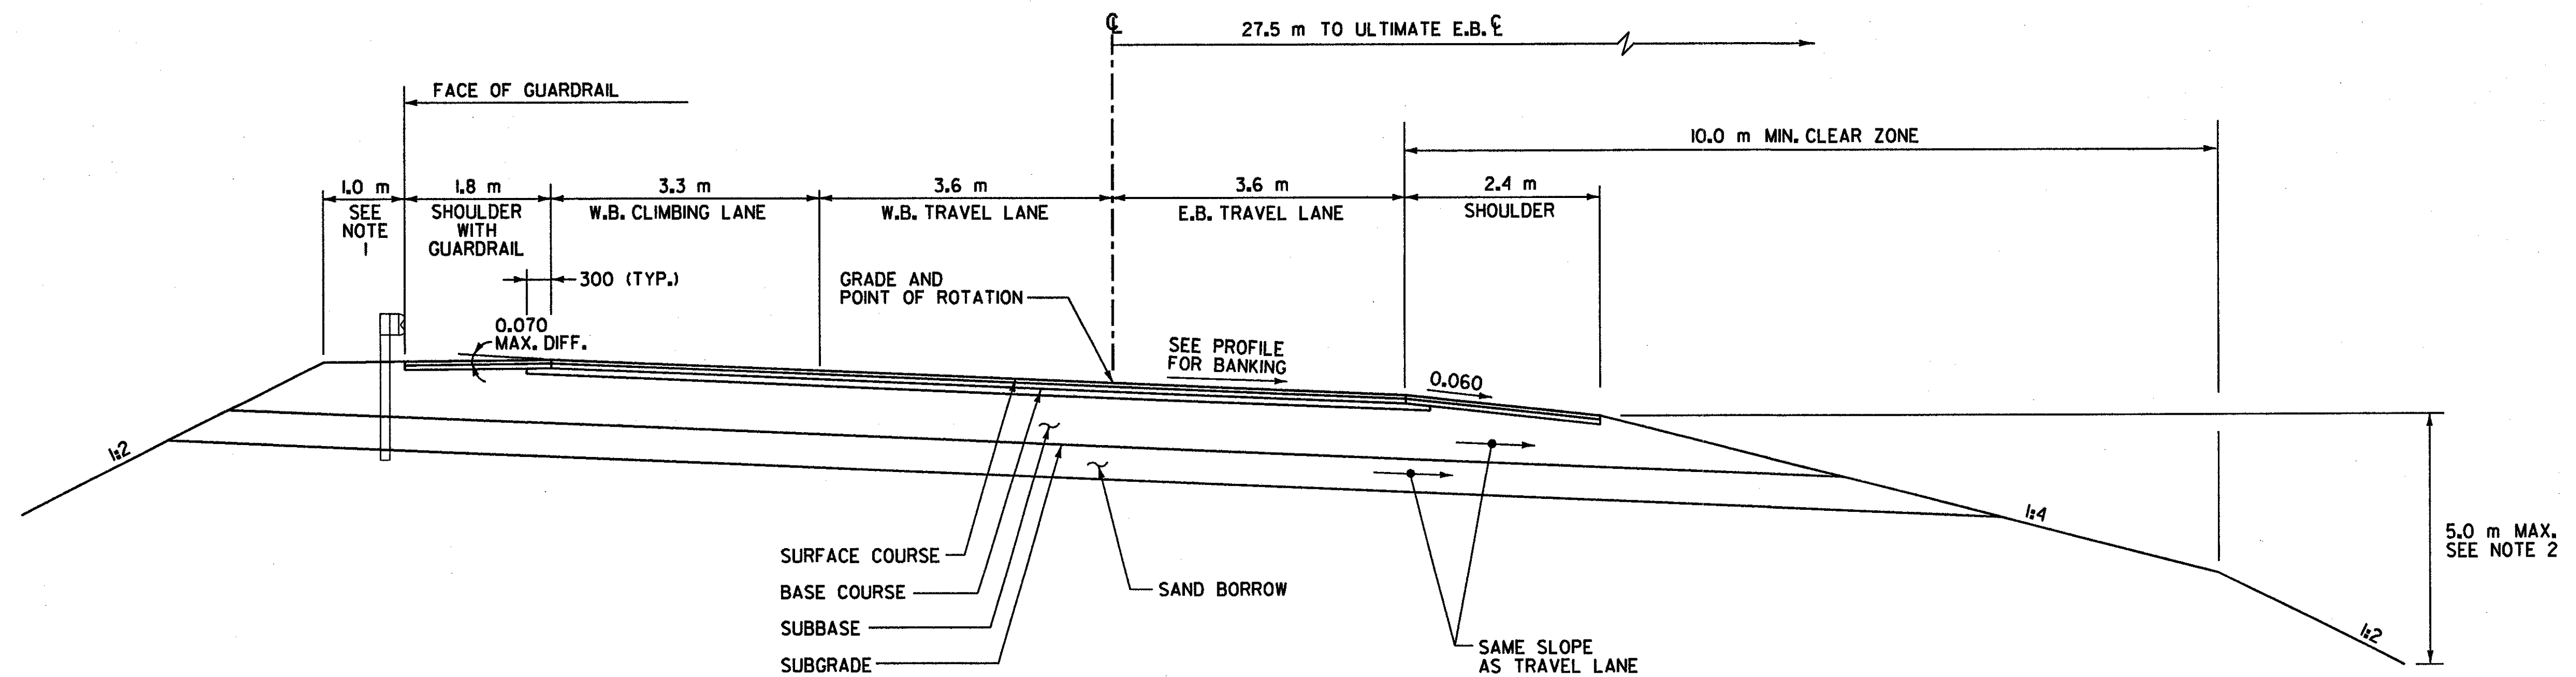

**BANKED SECTION
STA. 15+620.000 - STA. 16+160.000**

ALL DIMENSIONS IN MILLIMETERS EXCEPT WHERE OTHERWISE INDICATED.

**TYPICAL
SECTION
SHEET**

SURVEYED BY	C.H.A. & V.S.E.	DATE	12/93
DESIGNED BY	D.E.G.	DATE	11/01
DRAWN BY	J.N.	DATE	11/01
CHECKED BY	T.P.K.	DATE	11/01
DESIGN FILE NO.	/5116/VAOT/TS-II.DGN		
PROJ. NAME	BENNINGTON - HOOSICK D.P.L. 0146(1) C/3		
PROJ. NO.	P.L.N. 1306.60		
DWG No. TS-II	SHEET 59 OF 473		