
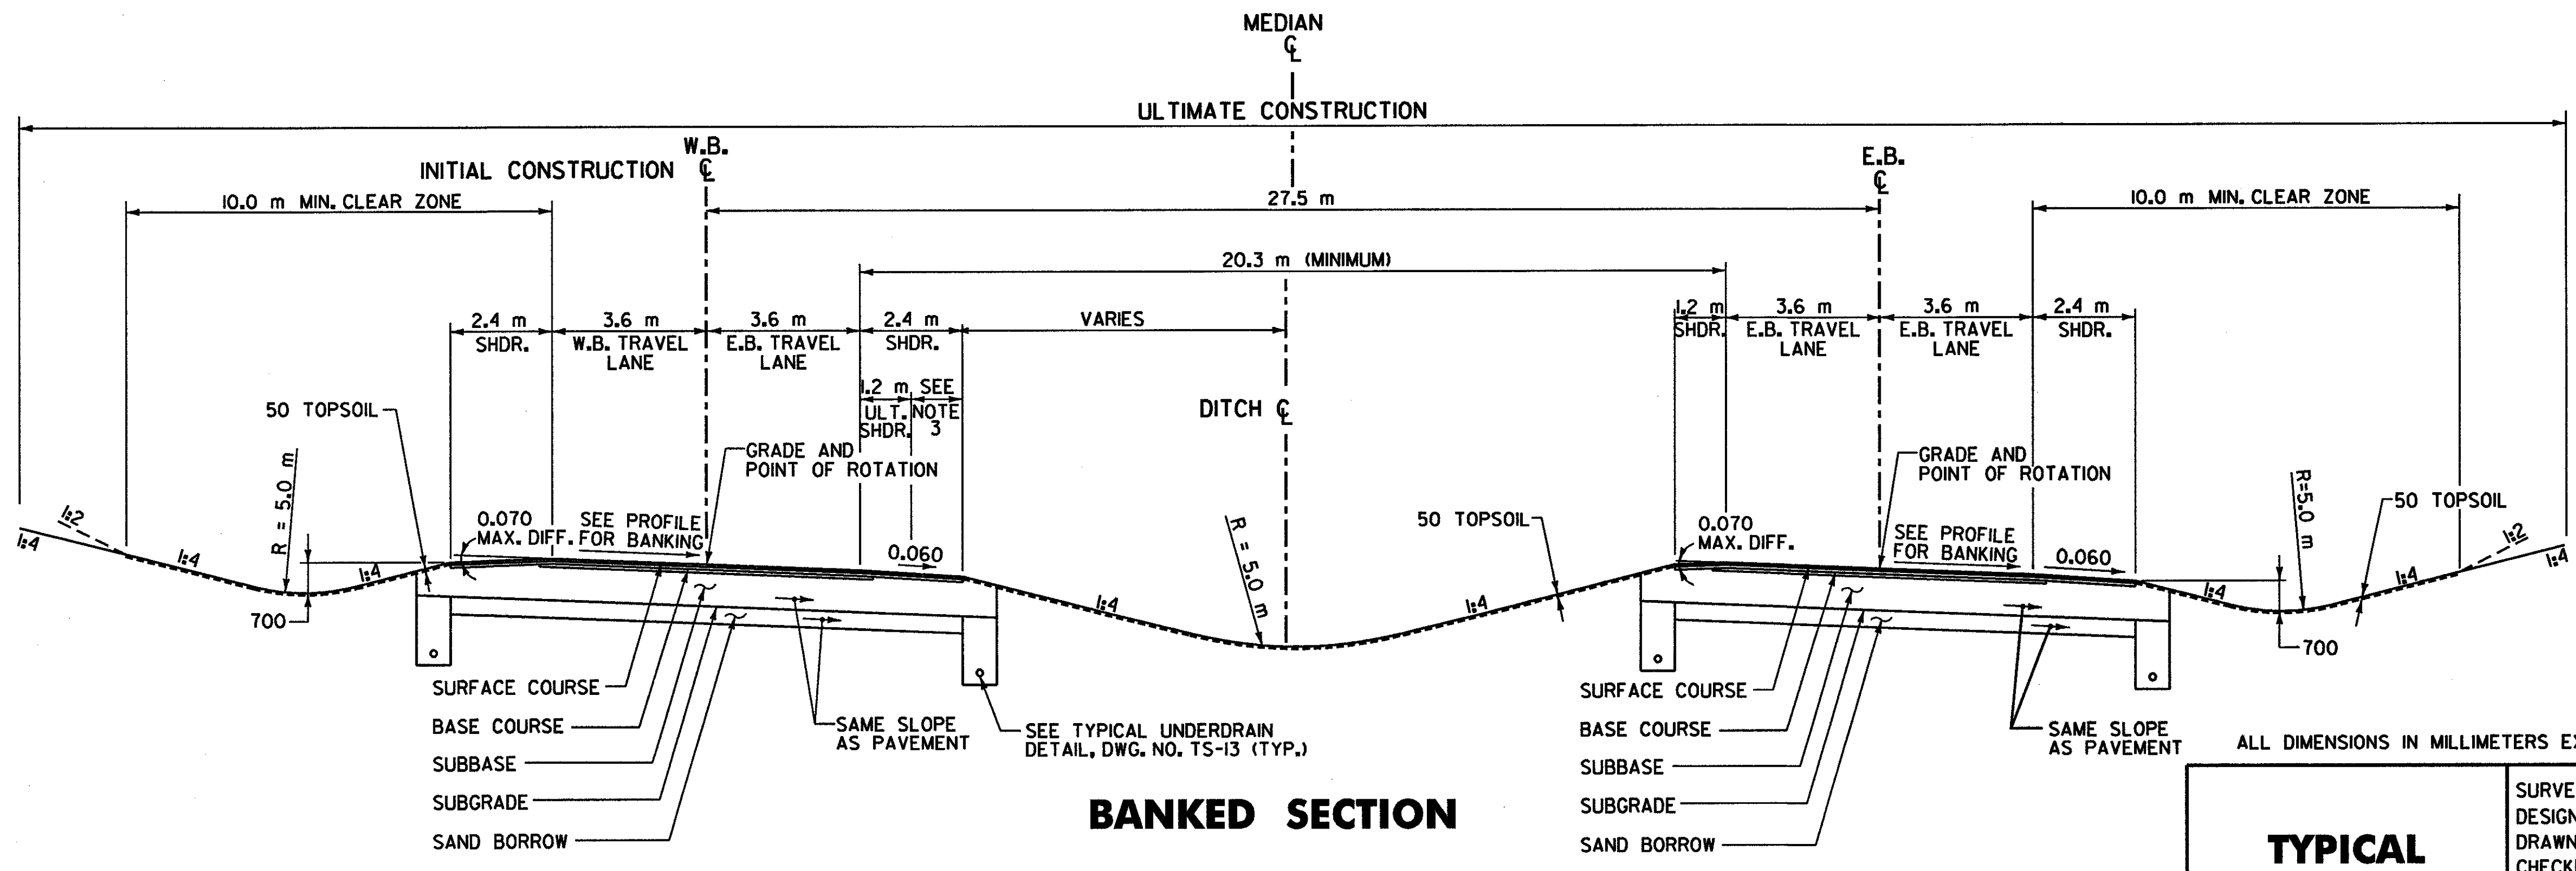


TYPICAL SECTIONS - ULTIMATE CONSTRUCTION

MATERIAL ITEM	THICKNESS TOLERANCE	THICKNESS	DESCRIPTION
PAVEMENT COURSES (TOTAL DEPTH)	± 5	130	SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (50 TYPE III S, 80 TYPE II S)
BASE COURSES (TOTAL DEPTH)	± 10	100	BASE COURSE, SUPERPAVE BITUMINOUS CONCRETE (PG 58-28), TYPE IS
SUBBASE	± 30	600	SUBBASE OF CRUSHED GRAVEL (COARSE GRADED)
SAND BORROW	± 30	400	SAND BORROW
SHOULDERS:		130	SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (50 TYPE III S, 80 TYPE II S)
		NOTE:	DESIGN FROST DEPTH - 1200

- NOTES:**
- ELIMINATE TOPSOIL AND SEEDING BEHIND GUARDRAIL TO SUBGRADE CATCH POINT.
 - FOR DETAILS OF INITIAL CONSTRUCTION TYPICAL SECTIONS, SEE DWG. NO. TS-3 TO DWG. NO. TS-13.
 - FOR ULTIMATE CONSTRUCTION, REMOVE PAVEMENT, TOPSOIL AND SEED.

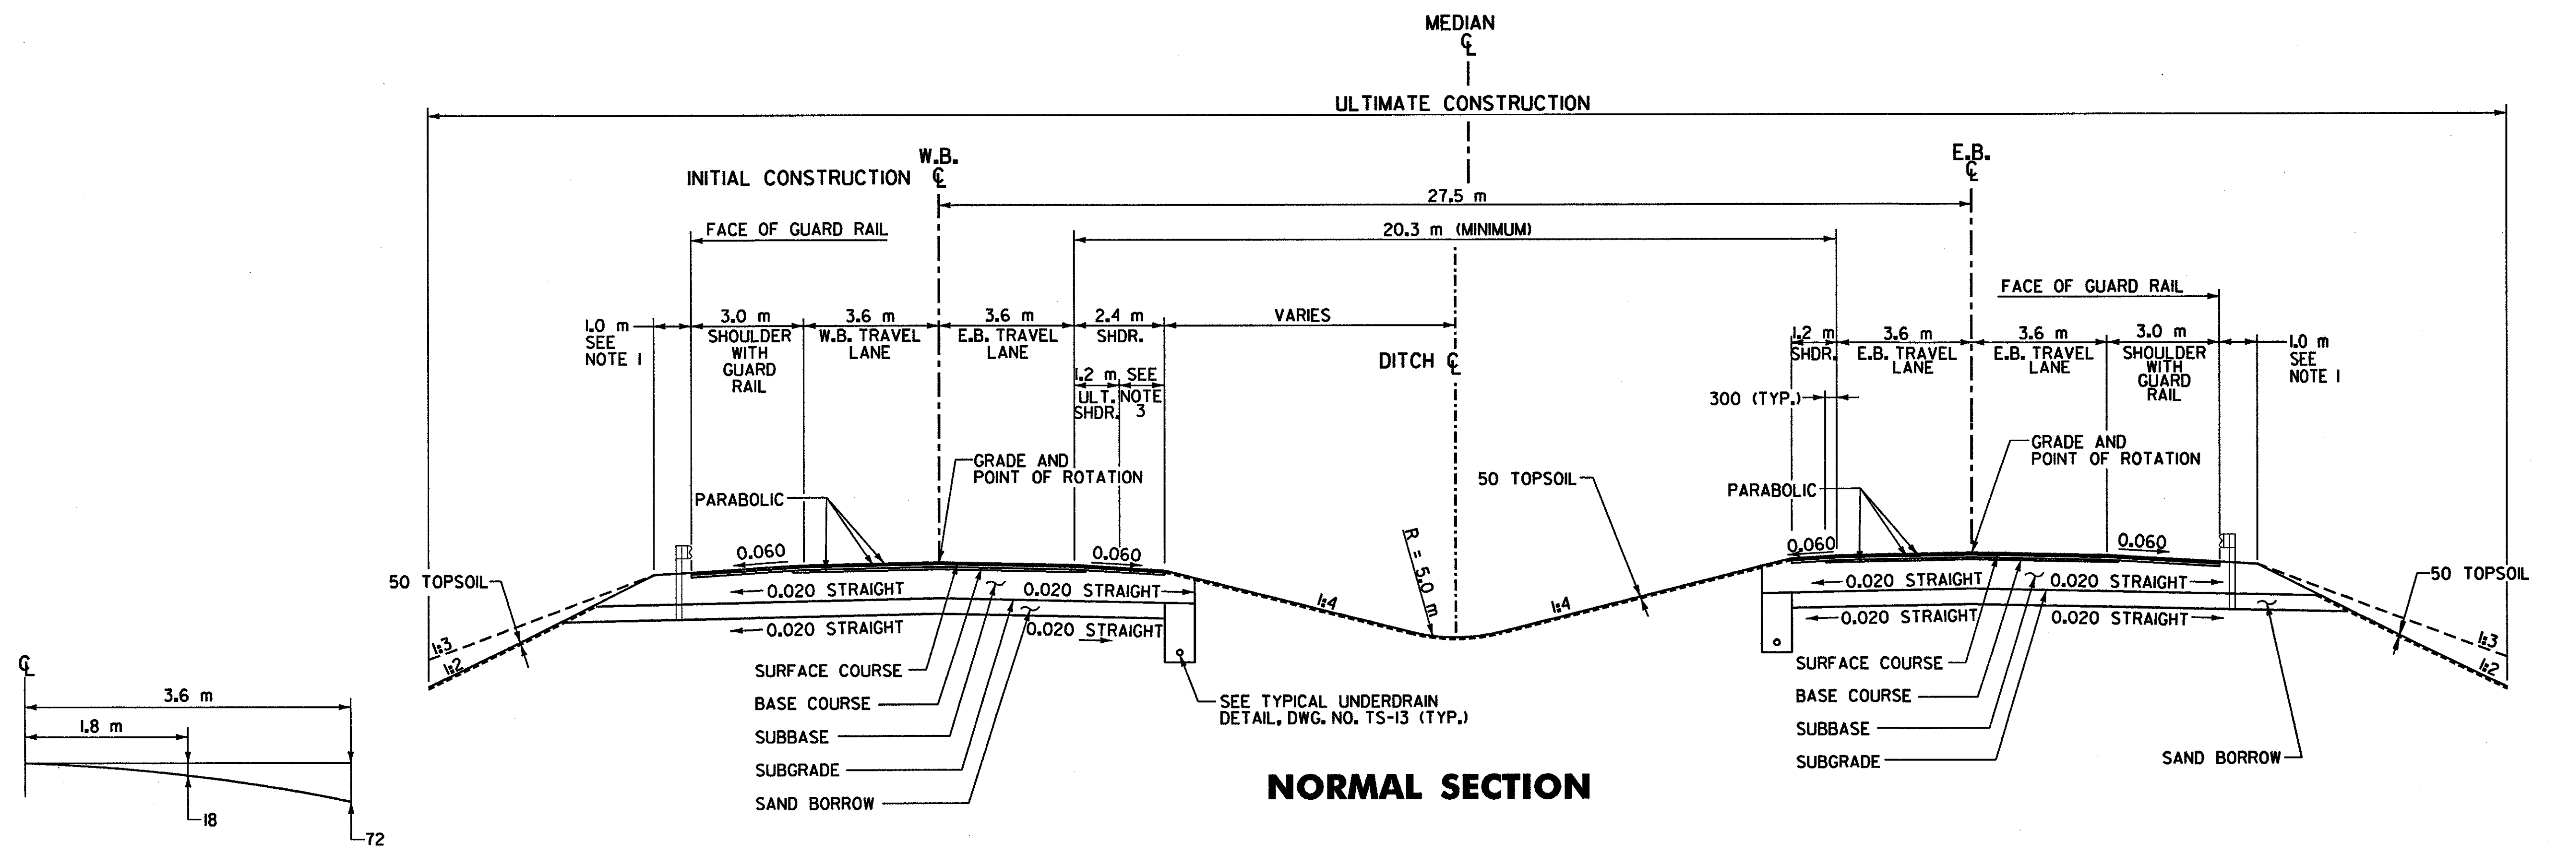

ALL DIMENSIONS IN MILLIMETERS EXCEPT WHERE OTHERWISE INDICATED.

TYPICAL SECTION SHEET	SURVEYED BY	C.H.A. & V.S.E.	DATE	12/93
	DESIGNED BY	D.E.G.	DATE	9/00
	DRAWN BY	J.N.	DATE	9/00
	CHECKED BY	T.P.K.	DATE	9/00
	DESIGN FILE NO.	/5116/VAOT/TS-LDGN		
PROJ. NAME	BENNINGTON - HOOSICK D.P.J. 0146(1) C/4			
PROJ. NO.	P.I.N. 1306.60			
DWG NO. TS - 1	SHEET 57 OF 385			

FILE NAME = ur:\5116\vaot\contract4\ts-1.dgn
 DATE/TIME = 07 SEP 2000
 USER = 1459