


TYPICAL SECTIONS - ACCELERATION / DECELERATION LANES



MATERIAL ITEM	THICKNESS TOLERANCE	130	SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (50 TYPE III S, 80 TYPE II S)
PAVEMENT COURSES (TOTAL DEPTH)	± 5	100	BASE COURSE, SUPERPAVE BITUMINOUS CONCRETE (PG 58-28), TYPE I S
BASE COURSES (TOTAL DEPTH)	± 10	600	SUBBASE OF CRUSHED GRAVEL (COARSE GRADED)
SUBBASE	± 30	400	SAND BORROW
SAND BORROW	± 30	130	SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (50 TYPE III S, 80 TYPE II S)
		NOTE:	DESIGN FROST DEPTH - 1200

NOTE:
1. ELIMINATE TOPSOIL AND SEEDING BEHIND GUARDRAIL TO SUBGRADE CATCH POINT.

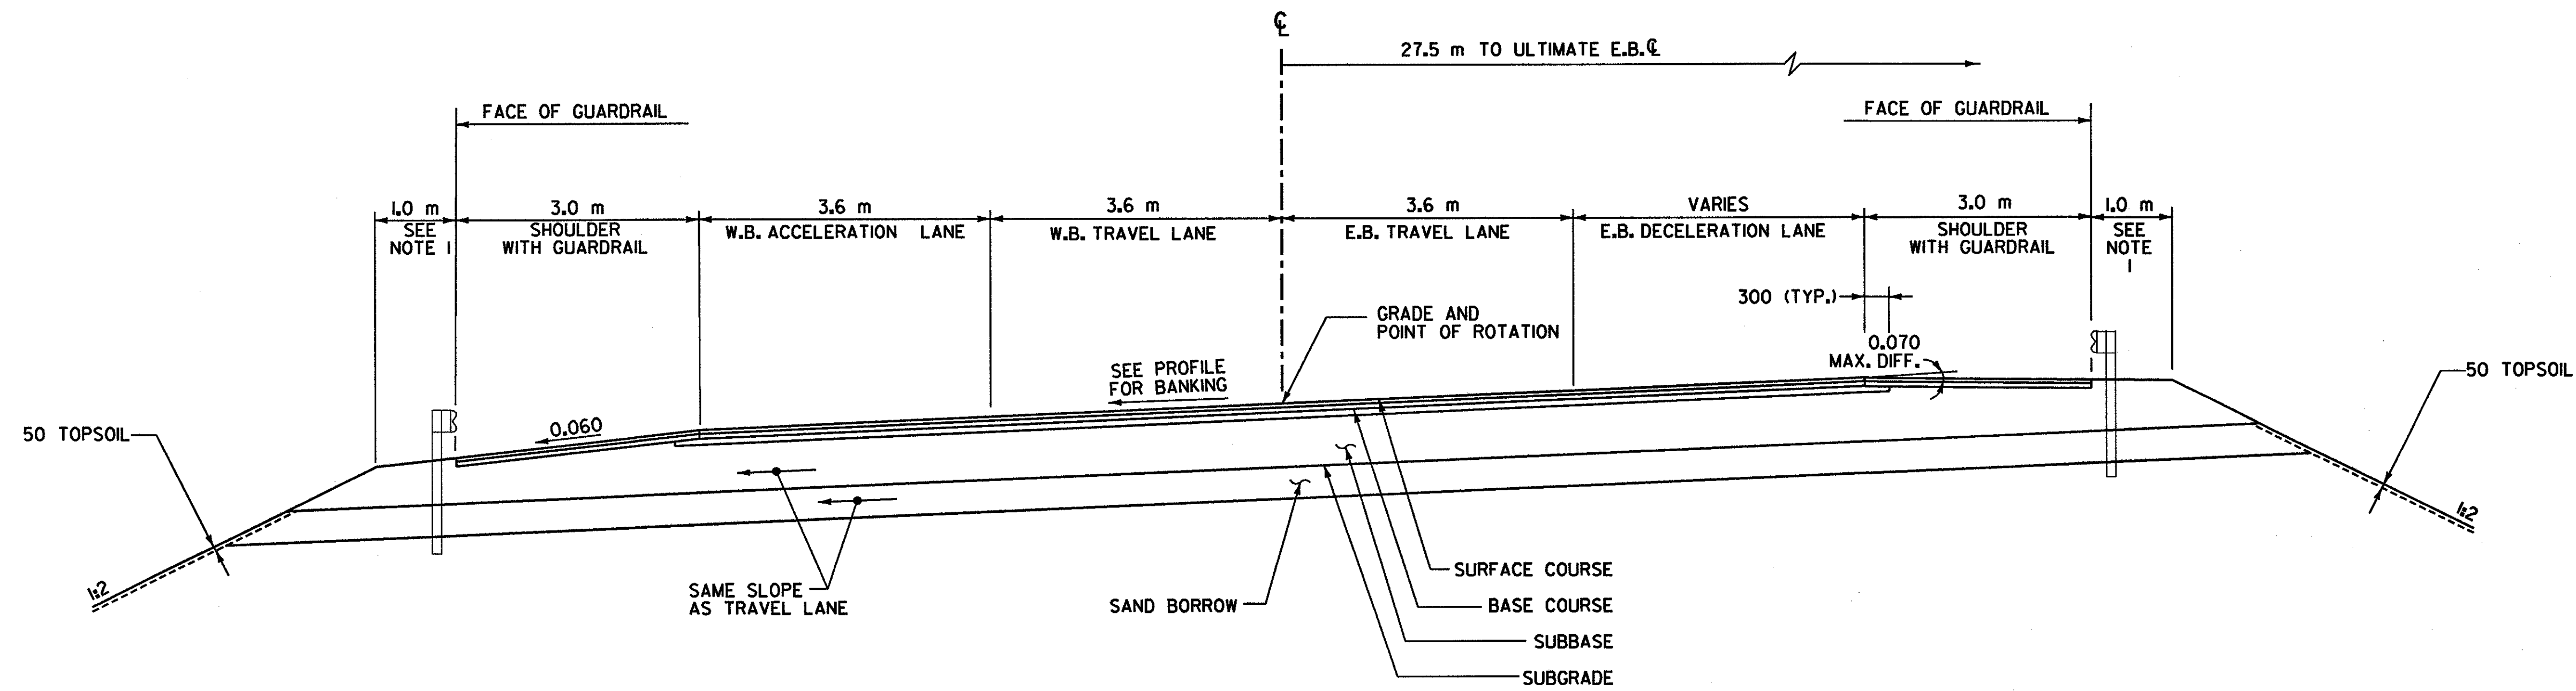

BANKED SECTION
STA. 16 + 695.000 - STA. 16 + 756.943

ALL DIMENSIONS IN MILLIMETERS EXCEPT WHERE OTHERWISE INDICATED.

TYPICAL SECTION SHEET

SURVEYED BY	C.H.A. & V.S.E.	DATE	12/93
DESIGNED BY	D.E.G.	DATE	9/00
DRAWN BY	J.N.	DATE	9/00
CHECKED BY	T.P.K.	DATE	9/00
DESIGN FILE NO.	5116/VAOT/TS-13.DGN		
PROJ. NAME	BENNINGTON - HOOSICK D.P.I. 0146(I) C/4		
PROJ. NO.	P.I.N. 1306.60		
DWG NO. TS-3	SHEET 59 OF 385		