



TYPICAL SECTIONS - VT RTE. 67A INTERCHANGE RAMP

| MATERIAL ITEM | THICKNESS | TOLERANCE | NOTE: |
|--------------------------------|-----------|-----------|--|
| PAVEMENT COURSES (TOTAL DEPTH) | ± 5 | | 130 SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (50 TYPE III S, 80 TYPE II S) |
| BASE COURSES (TOTAL DEPTH) | ± 10 | | 100 BASE COURSE, SUPERPAVE BITUMINOUS CONCRETE (PG 58-28), TYPE I S |
| SUBBASE | ± 30 | | 600 SUBBASE OF CRUSHED GRAVEL (COARSE GRADED) |
| SAND BORROW | ± 30 | | 400 SAND BORROW |
| | | | SHOULDERS: 130 SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (50 TYPE III S, 80 TYPE II S) |
| | | | NOTE: DESIGN FROST DEPTH - 1200 |

NOTE:
1. ELIMINATE TOPSOIL AND SEEDING BEHIND GUARDRAIL TO SUBGRADE CATCH POINT.

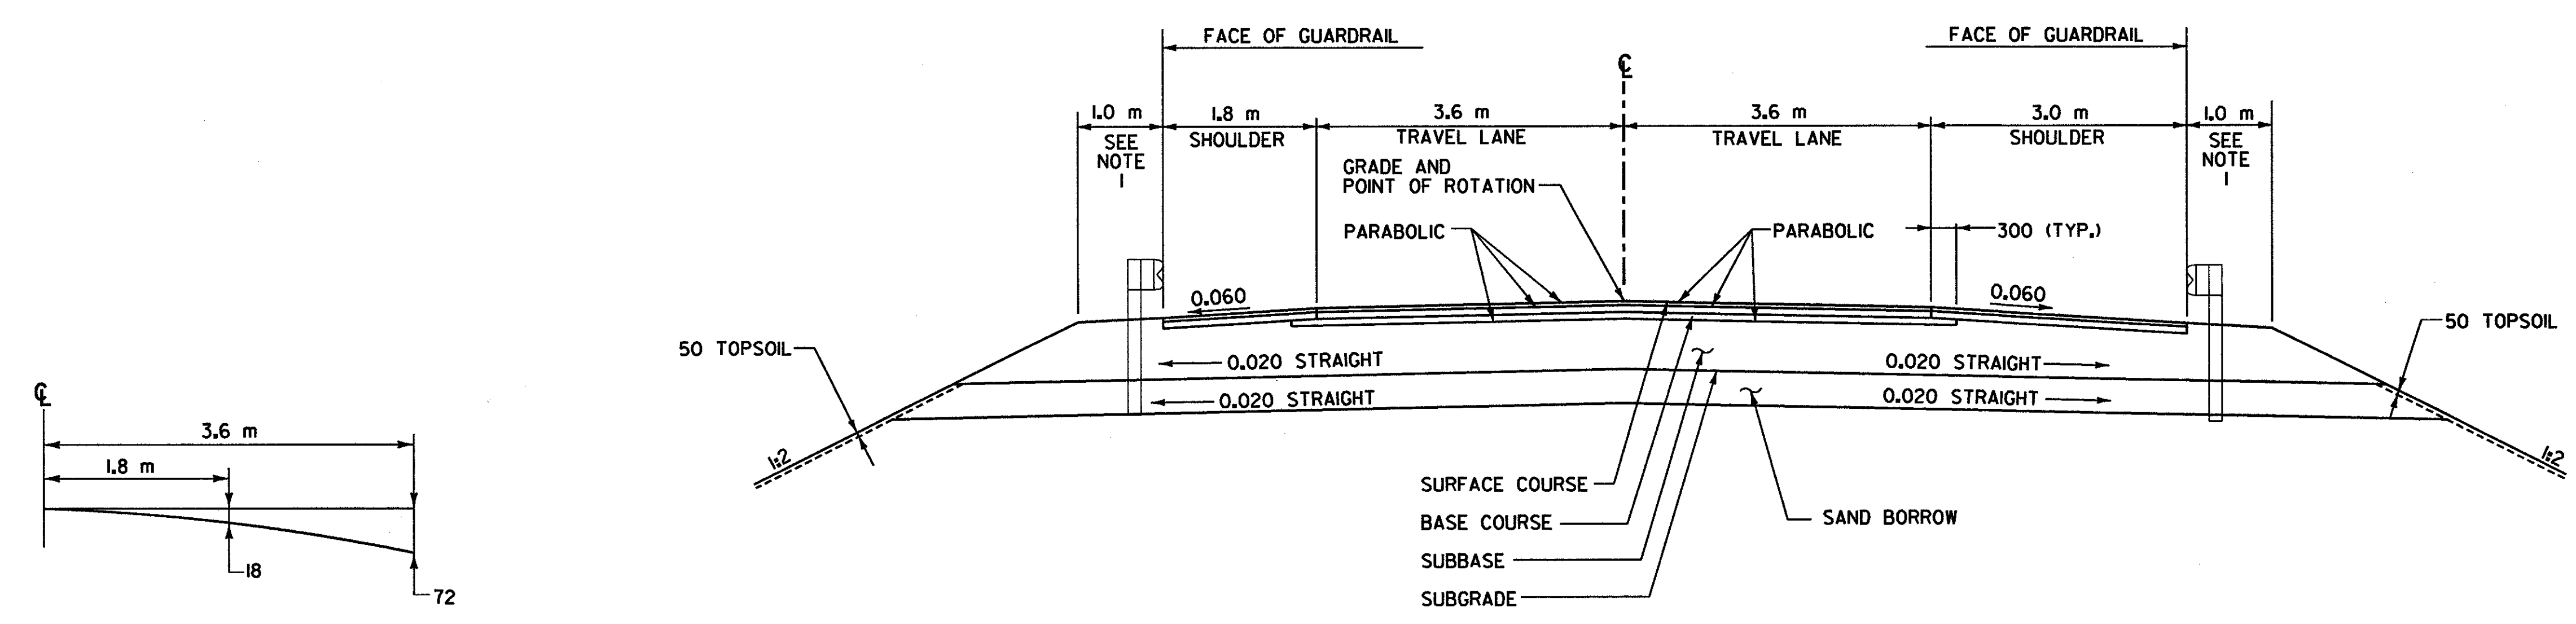

RAMP B & D NORMAL SECTION
STA. B10 + 064.800 - STA. B10 + 070.000
STA. D10 + 227.791 - STA. D10 + 236.439

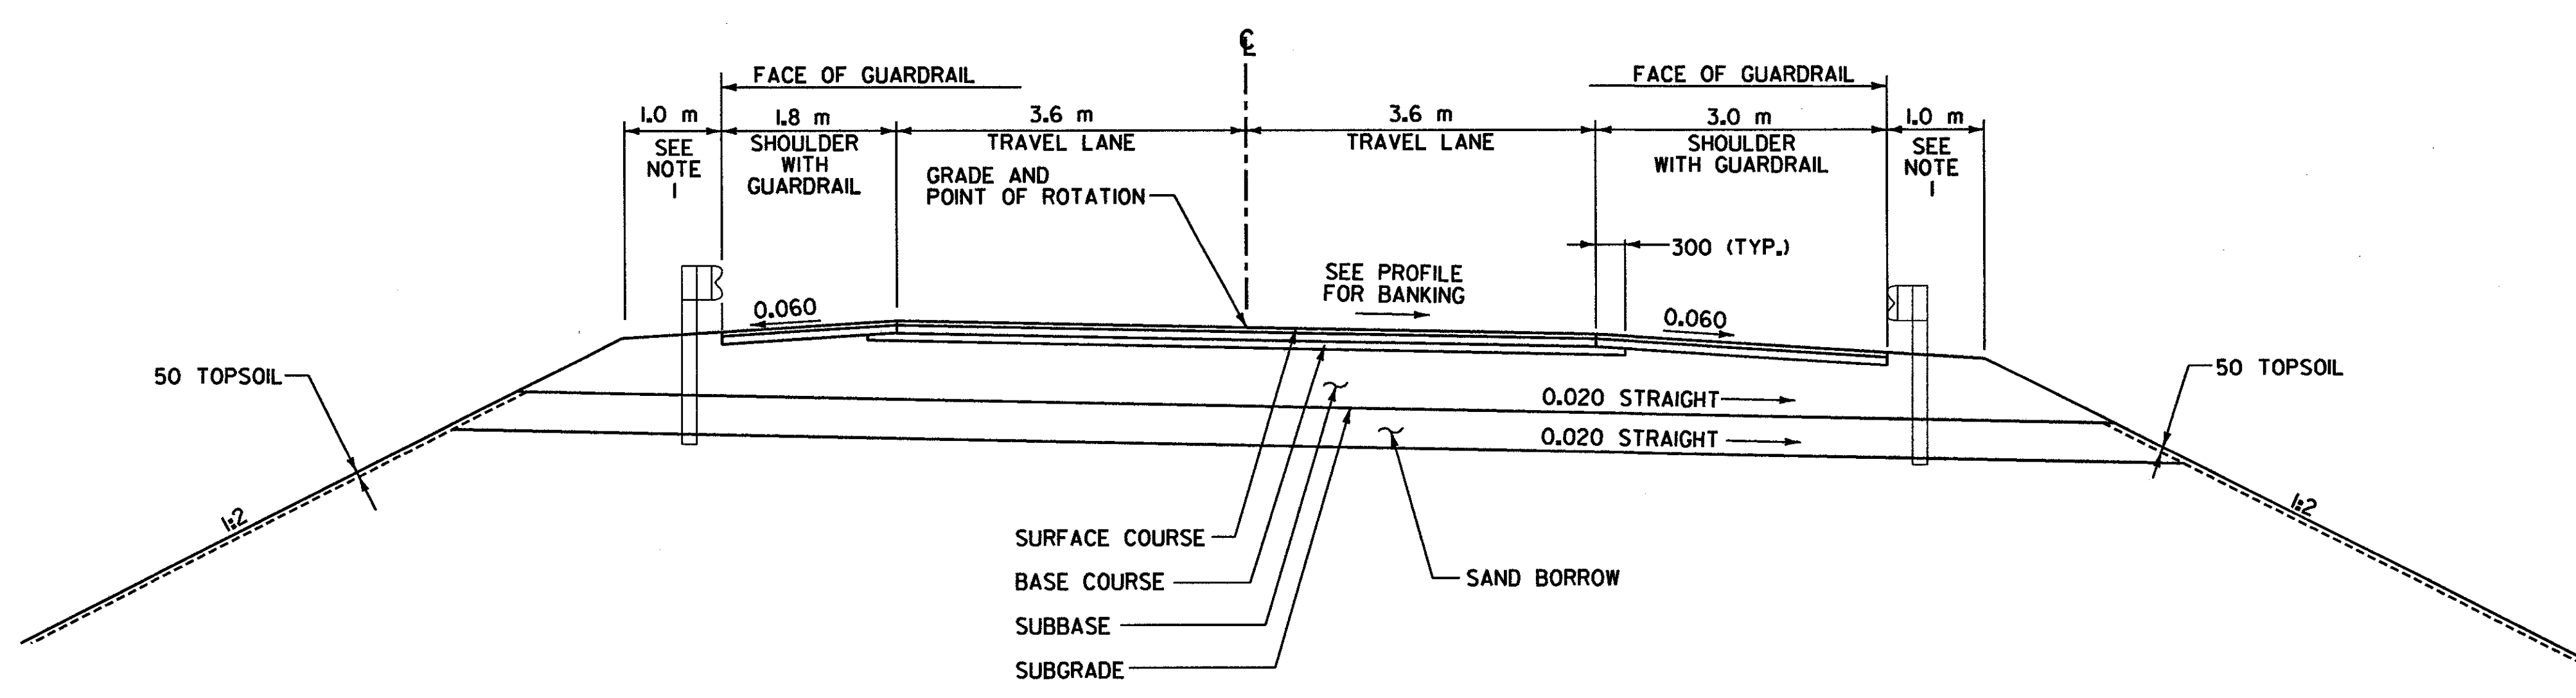

RAMP B BANKED SECTION
STA. B10 + 070.000 - STA. B10 + 175.097

ALL DIMENSIONS IN MILLIMETERS EXCEPT WHERE OTHERWISE INDICATED.

| | | | | |
|------------------------------|--|----------------------|------|-------|
| TYPICAL SECTION SHEET | SURVEYED BY | C.H.A. & V.S.E. | DATE | 12/93 |
| | DESIGNED BY | D.E.G. | DATE | 9/00 |
| | DRAWN BY | J.N. | DATE | 9/00 |
| | CHECKED BY | T.P.K. | DATE | 9/00 |
| | DESIGN FILE NO. | /5116/VAOT/TS-15.DGN | | |
| PROJ. NAME | BENNINGTON - HOOSICK D.P.L. 0146(1) C/4 | | | |
| PROJ. NO. | P.L.N. 1306.60 | | | |
| DWG NO. | TS-5 | SHEET 61 OF 385 | | |

FILE NAME = u:\5116\vaot\contract4\ts-15.dgn
 DATE/TIME = 07 SEP 2000
 USER = 1459