


TYPICAL SECTIONS - VT RTE.67A INTERCHANGE RAMP




MATERIAL ITEM	THICKNESS TOLERANCE		
PAVEMENT COURSES (TOTAL DEPTH)	± 5	130	SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (50 TYPE III S, 80 TYPE II S)
BASE COURSES (TOTAL DEPTH)	± 10	100	BASE COURSE, SUPERPAVE BITUMINOUS CONCRETE (PG 58-28), TYPE I S
SUBBASE	± 30	600	SUBBASE OF CRUSHED GRAVEL (COARSE GRADED)
SAND BORROW	± 30	400	SAND BORROW
		130	SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (50 TYPE III S, 80 TYPE II S)
		NOTE:	DESIGN FROST DEPTH - I200

- NOTES:**
- THE LOWER SHOULDER SLOPE SHALL MATCH PAVEMENT SLOPE GREATER THAN 0.060.
 - THE INSIDE SHOULDER ON THE FOLLOWING RAMP SHALL BE PAVED TO THE SAME DEPTH AS THE TRAVEL LANE AT THE LOCATIONS SHOWN.
- RAMP** **STATION**
RAMP AB STA. AB10+117.900 - STA. AB10+140.000

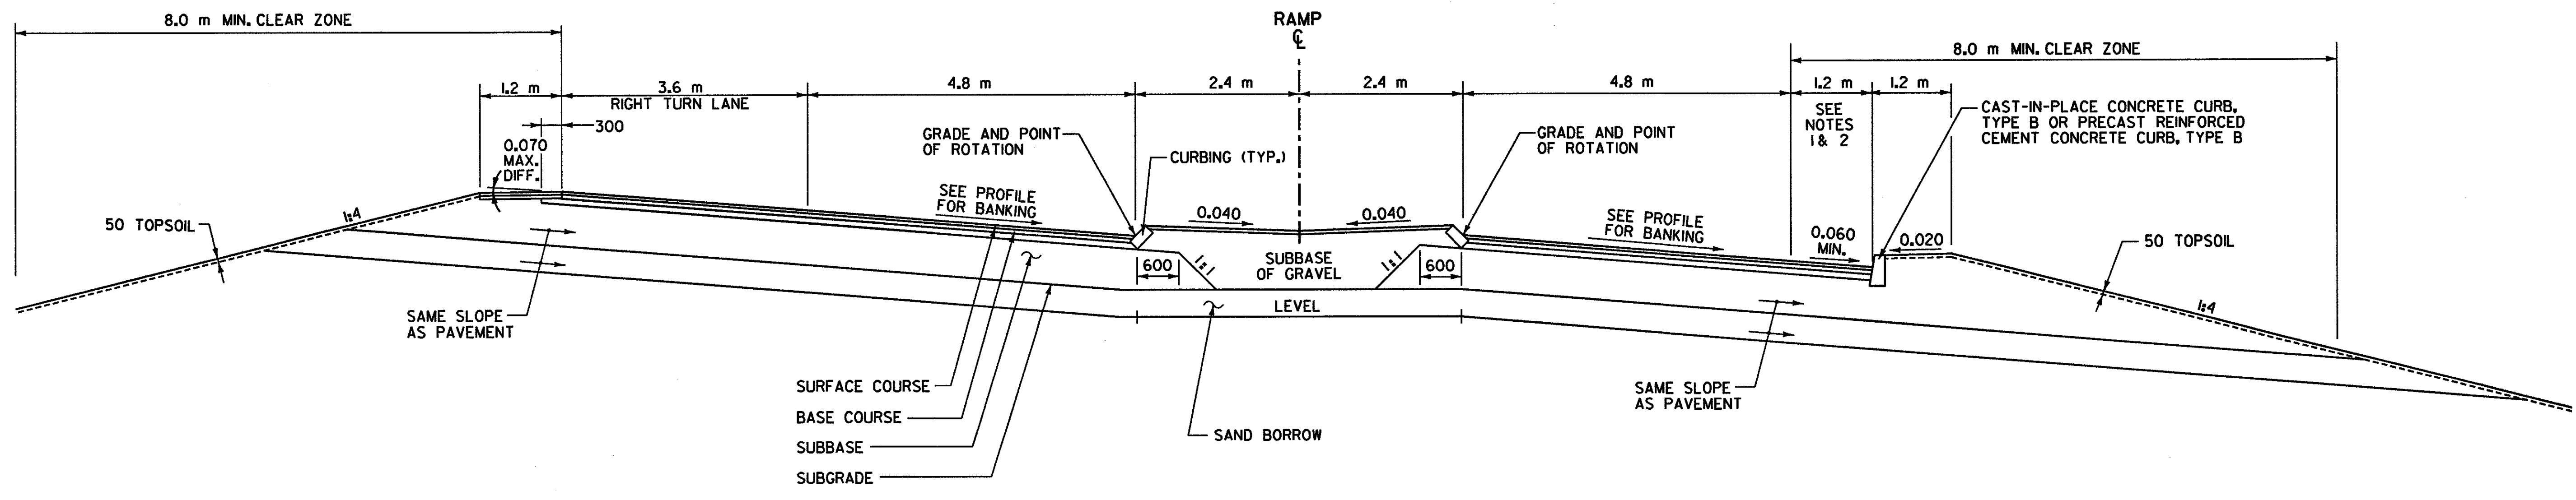

RAMP AB & CD BANKED SECTION
STA. AB10 + 090.000 - STA. AB10 + 140.000
STA. CD10 + 088.300 - STA. CD10 + 119.500

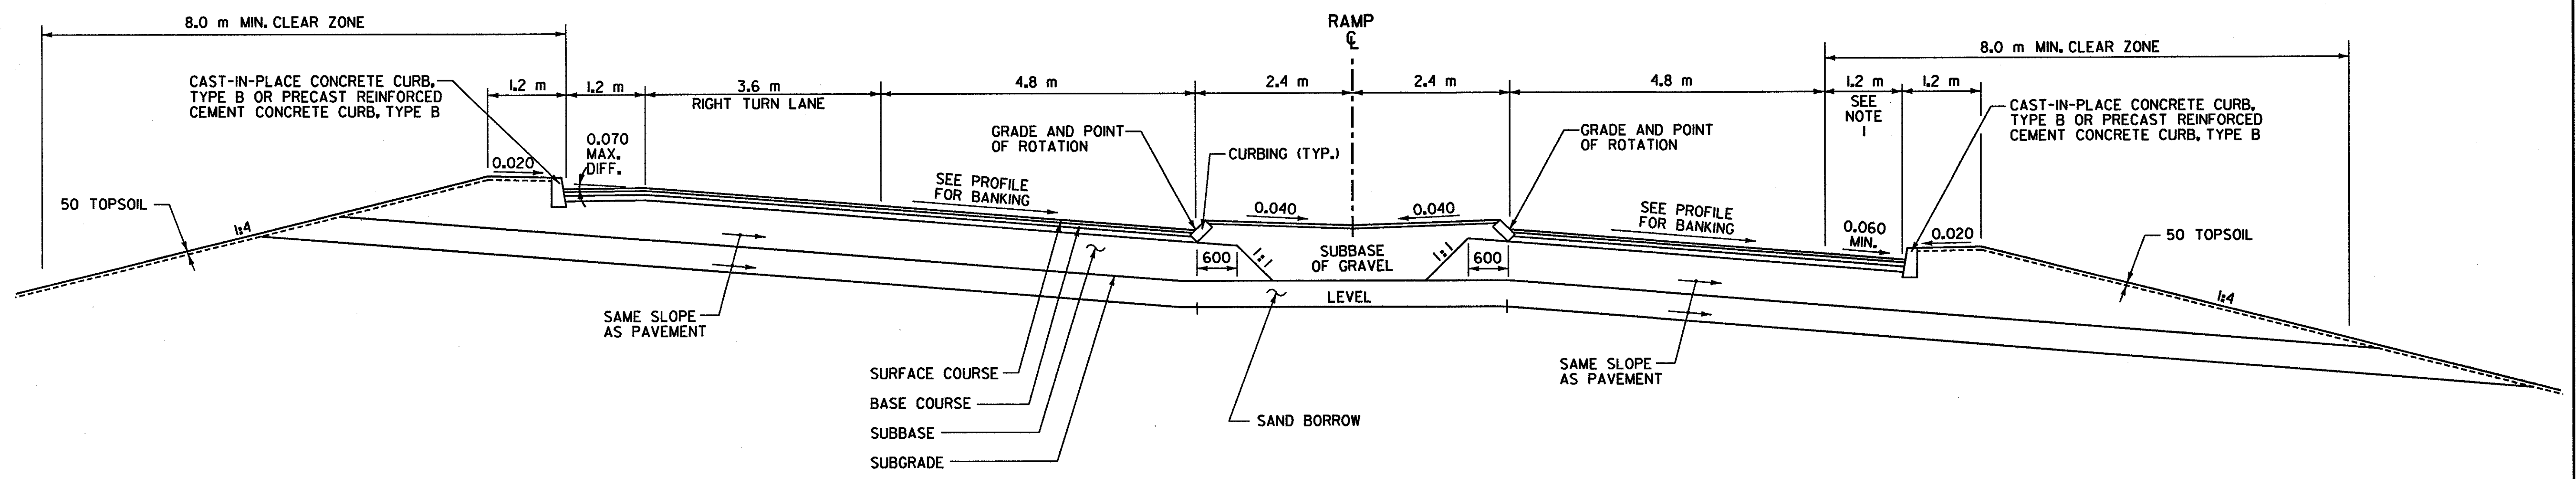

RAMP AB & CD BANKED SECTION
STA. AB10 + 036.100 - STA. AB10 + 090.000
STA. CD10 + 028.800 - STA. CD10 + 088.300

ALL DIMENSIONS IN MILLIMETERS EXCEPT WHERE OTHERWISE INDICATED.

TYPICAL SECTION SHEET	SURVEYED BY	C.H.A. & V.S.E.	DATE	12/93
	DESIGNED BY	D.E.G.	DATE	9/00
	DRAWN BY	J.N.	DATE	9/00
	CHECKED BY	T.P.K.	DATE	9/00
	DESIGN FILE NO.	/516/VAOT/TS-18.DGN		
PROJ. NAME	BENNINGTON - HOOSICK D.P.J. 0146(I) C/4			
PROJ. NO.	P.I.N. 1306.60			
DWG NO.	TS-8	SHEET 64 OF 385		

FILE NAME =u:\5116\vaot\contract4\ts-18.dgn
DATE/TIME =07 SEP 2000
USER =1459