

TYPICAL SECTIONS - VT RTE.67A INTERCHANGE RAMP




MATERIAL ITEM	THICKNESS TOLERANCE		
PAVEMENT COURSES (TOTAL DEPTH)	± 5	130	SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (50 TYPE III S, 80 TYPE II S)
BASE COURSES (TOTAL DEPTH)	± 10	100	BASE COURSE, SUPERPAVE BITUMINOUS CONCRETE (PG 58-28), TYPE I S
SUBBASE	± 30	600	SUBBASE OF CRUSHED GRAVEL (COARSE GRADED)
SAND BORROW	± 30	400	SAND BORROW
		SHOULDERS: 130	SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (50 TYPE III S, 80 TYPE II S)
		NOTE:	DESIGN FROST DEPTH - I200


NOTES:

- ELIMINATE TOPSOIL AND SEEDING BEHIND GUARDRAIL TO SUBGRADE CATCH POINT.
- THE LOWER SHOULDER SLOPE SHALL MATCH PAVEMENT SLOPE GREATER THAN 0.060.
- THE INSIDE SHOULDER ON THE FOLLOWING RAMP SHALL BE PAVED TO THE SAME DEPTH AS THE TRAVELWAY AT THE LOCATIONS SHOWN:

RAMP	STATION
RAMP CD	STA. CD10+212.196 - STA. CD10+271.929

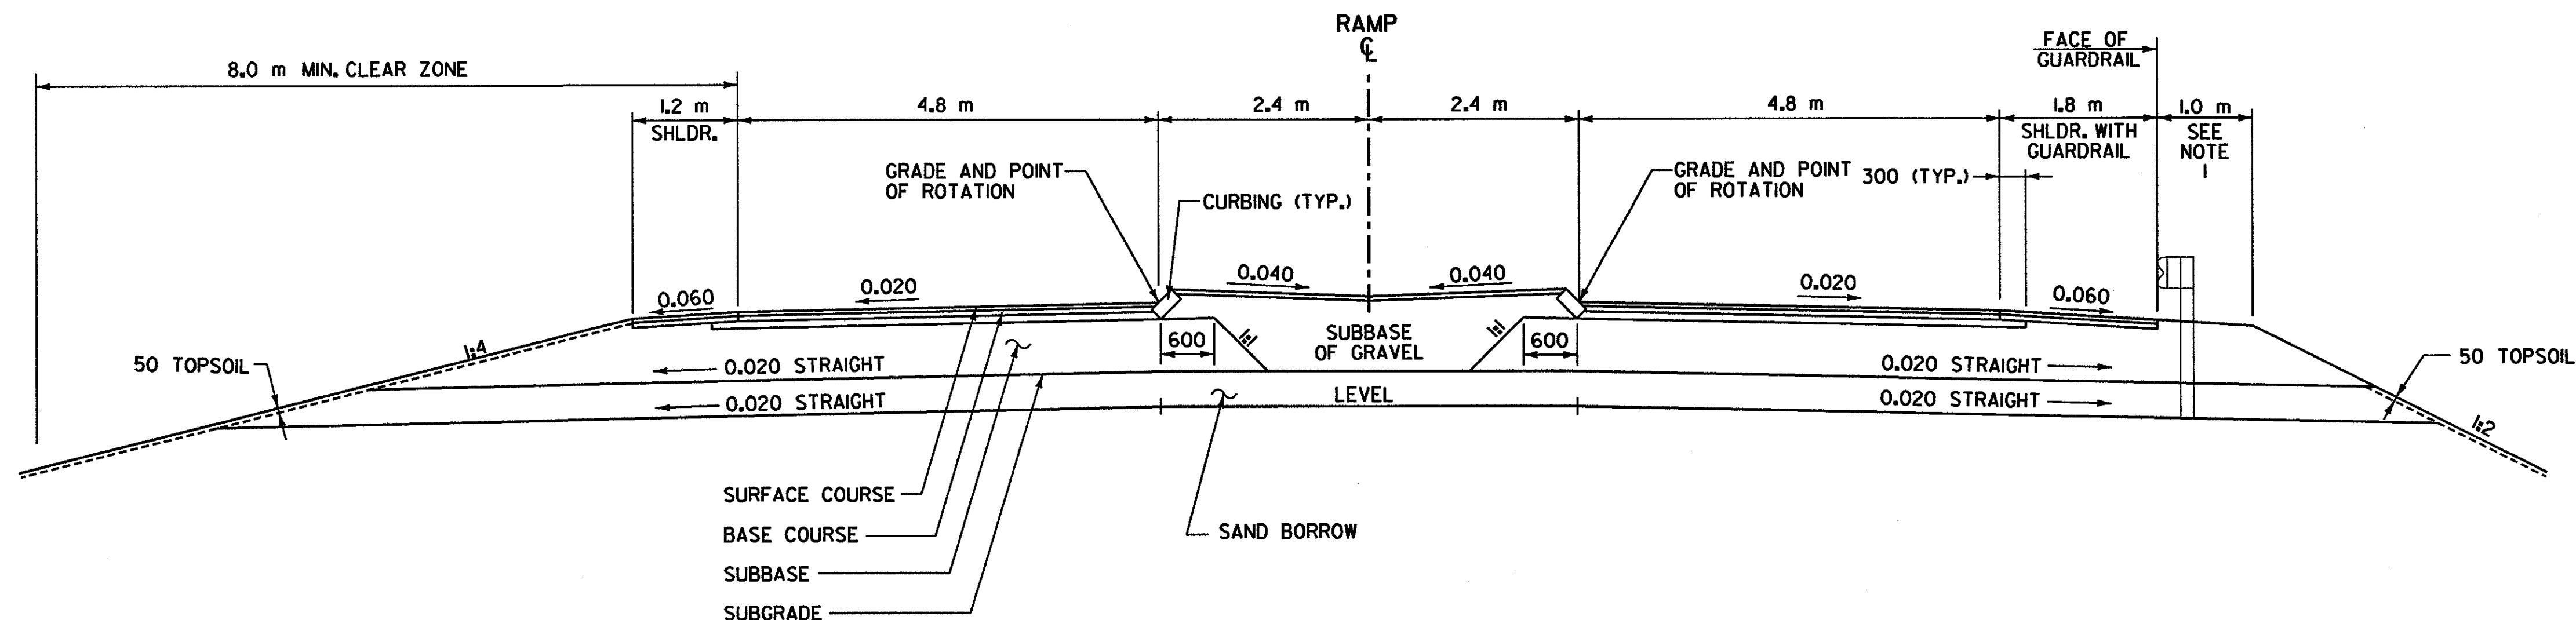

**RAMP CD NORMAL RAMP SECTION
STA. CD10+140.000 - STA. CD10+174.000**

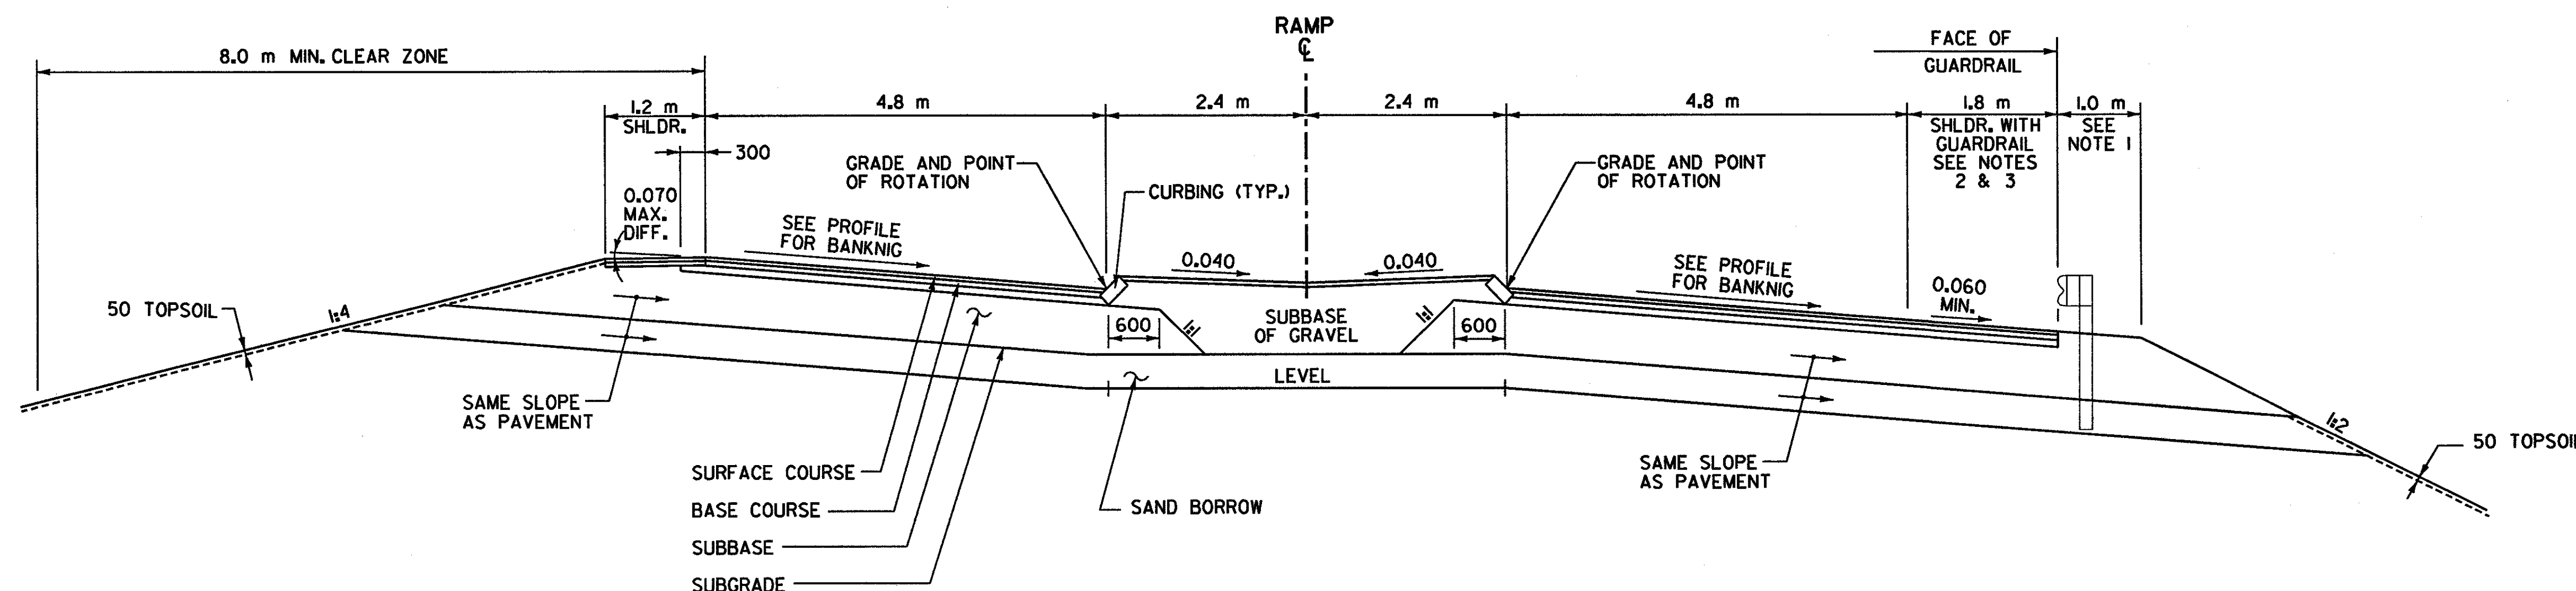

**RAMP CD BANKED SECTION
STA. CD10+174.000 - STA. CD10+271.929**

ALL DIMENSIONS IN MILLIMETERS EXCEPT WHERE OTHERWISE INDICATED.

TYPICAL SECTION SHEET

SURVEYED BY	C.H.A. & V.S.E.	DATE	12/93
DESIGNED BY	D.E.G.	DATE	9/00
DRAWN BY	J.N.	DATE	9/00
CHECKED BY	T.P.K.	DATE	9/00

DESIGN FILE NO. /5116/VAOT/TS-20.DGN

PROJ. NAME BENNINGTON - HOOSICK
D.P.I. 0146(C) C/4

PROJ. NO. P.I.N. 1306.60

DWG NO. TS-10 SHEET 66 OF 385