


SEE DWG. NO. SD-2 FOR SPECIFIC CONDUIT, PULLBOX/JUNCTION BOX, AND CABLE LOCATIONS AT THIS INTERSECTION.

SEE DWG. NO. SD-1 FOR SPECIFIC CONDUIT, PULLBOX/JUNCTION BOX, AND CABLE LOCATIONS AT THIS INTERSECTION.

LEGEND

EXISTING	NEW	DESCRIPTION
⊙	○	STRAIN POLE
□	■	CONTROLLER CABINET
▣	■	PULLBOX/JUNCTION BOX
- EX -	- - -	CONDUIT

- NOTES:**
- SHIELDED COMMUNICATIONS CABLE WITH FOUR TWISTED PAIR OF TELEPHONE GRADE WIRE (19 AWG) SHALL BE USED FOR INTERCONNECTED SIGNAL COORDINATION. THIS CABLE SHALL BE PAID FOR UNDER ITEM 678.23 WIRED CONDUIT.
 - THE INTERCONNECT CABLE SHIELD MUST BE GROUNDED AT EACH LOCATION OR WHEREVER THE OUTSIDE INSULATION IS BROKEN.
 - MAXIMUM PULLBOX/JUNCTION BOX SPACING FOR INTERCONNECT CABLE RUN BETWEEN INTERSECTION IS 75 m.

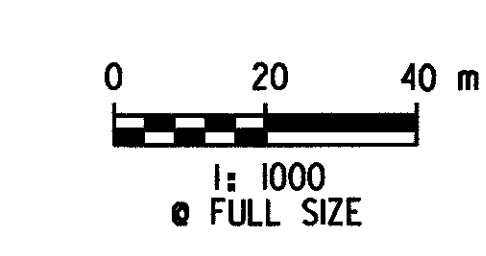

DATUM

VERTICAL	NAVD 88
HORIZONTAL	NAD 83 (1992)

SIGNAL INTERCONNECT PLAN	SURVEYED BY	C.H.A. & V.S.E.	DATE	12/93
	DESIGNED BY	M.R.W.	DATE	9/00
	DRAWN BY	K.H.D.	DATE	9/00
	CHECKED BY	T.R.J.	DATE	9/00
DESIGN FILE NO. SIPLDGN				
PROJ. NAME BENNINGTON - HOOSICK D.P.L. 0146(1) C14				
PROJ. NO. P.I.N. 1306.60				
DWG NO. SD-3 SHEET 170 OF 385				

FILE NAME = u:\5116\vaot\contract4\sp1.dgn
 DATE/TIME = 07 SEP 2000
 USER = 1459