


LOCATION				FEET OF DITCHING			MISC. ITEMS				REMARKS	LOCATION				FEET OF DITCHING			MISC. ITEMS			REMARKS				
SITE	STATION	STATION	POS.	PERCENT GRADE			653.20	613.10	613.11	649.31		TEMP. EROS. MATT.	STONE FILL TYP. I	STONE FILL TYP. II	GEOT. UNDER STONE FILL	SITE	STATION	STATION	POS.	PERCENT GRADE			653.20	613.10	649.31	
				0-1	1-2.5	2.5-10	0-1	1-2.5	2.5-10	TEMP. EROS. MATT.										STONE FILL TYP. I	GEOT. UNDER STONE FILL					
				LF	LF	LF	LF	LF	LF	SY										CY	CY		SY	LF	LF	LF
WILDER STATE HIGHWAY				LF	LF	LF	SY	CY	CY	SY									LF	LF	LF	SY	CY	SY		
1	H 0+25	H 3+86	RT		361		120.3																			
2	H 0+25	H 3+86	LT		361		120.3																			
3	H 29+53		RT			15		2.8				8.3														
4	H 32+30		RT			5		0.6				1.7														
5	H 32+70	H 33+04	RT								63.0	94.4	SLOPE STABILIZATION													
6	H 35+00		LT			5		0.5				1.4														
7	H 36+28		RT			12		1.8				5.3														
8	H 36+46		LT			6		0.8				2.3														
9	H 38+67		RT			7		0.5				1.6														
HARTFORD US ROUTE 5																										
10	264+00	277+20	LT		1320		440.0																			
11	283+00	288+30	LT		530		176.7																			
12	327+40	332+70	LT		530		176.7																			
13	346+40	352+70	RT		630		210.0																			
14	358+00	361+15	RT		315		105.0																			
15	376+00	378+00	RT		200		66.7																			
16	378+00	391+80	LT		1380		460.0																			
17	385+58		RT			5		0.4				1.1														
18	386+67		RT			5		0.4				1.1														
19	396+00	398+66	LT		266		88.7																			
NORWICH US ROUTE 5																										
20	0+00	5+30	LT		530		176.7																			
PROJECT SUBTOTALS							2141.1	7.8	63.0	117.2																
ROUNDINGS							8.9	2.2	2.0	2.8																
PROJECT TOTALS							2150.0	10.0	65.0	120.0																

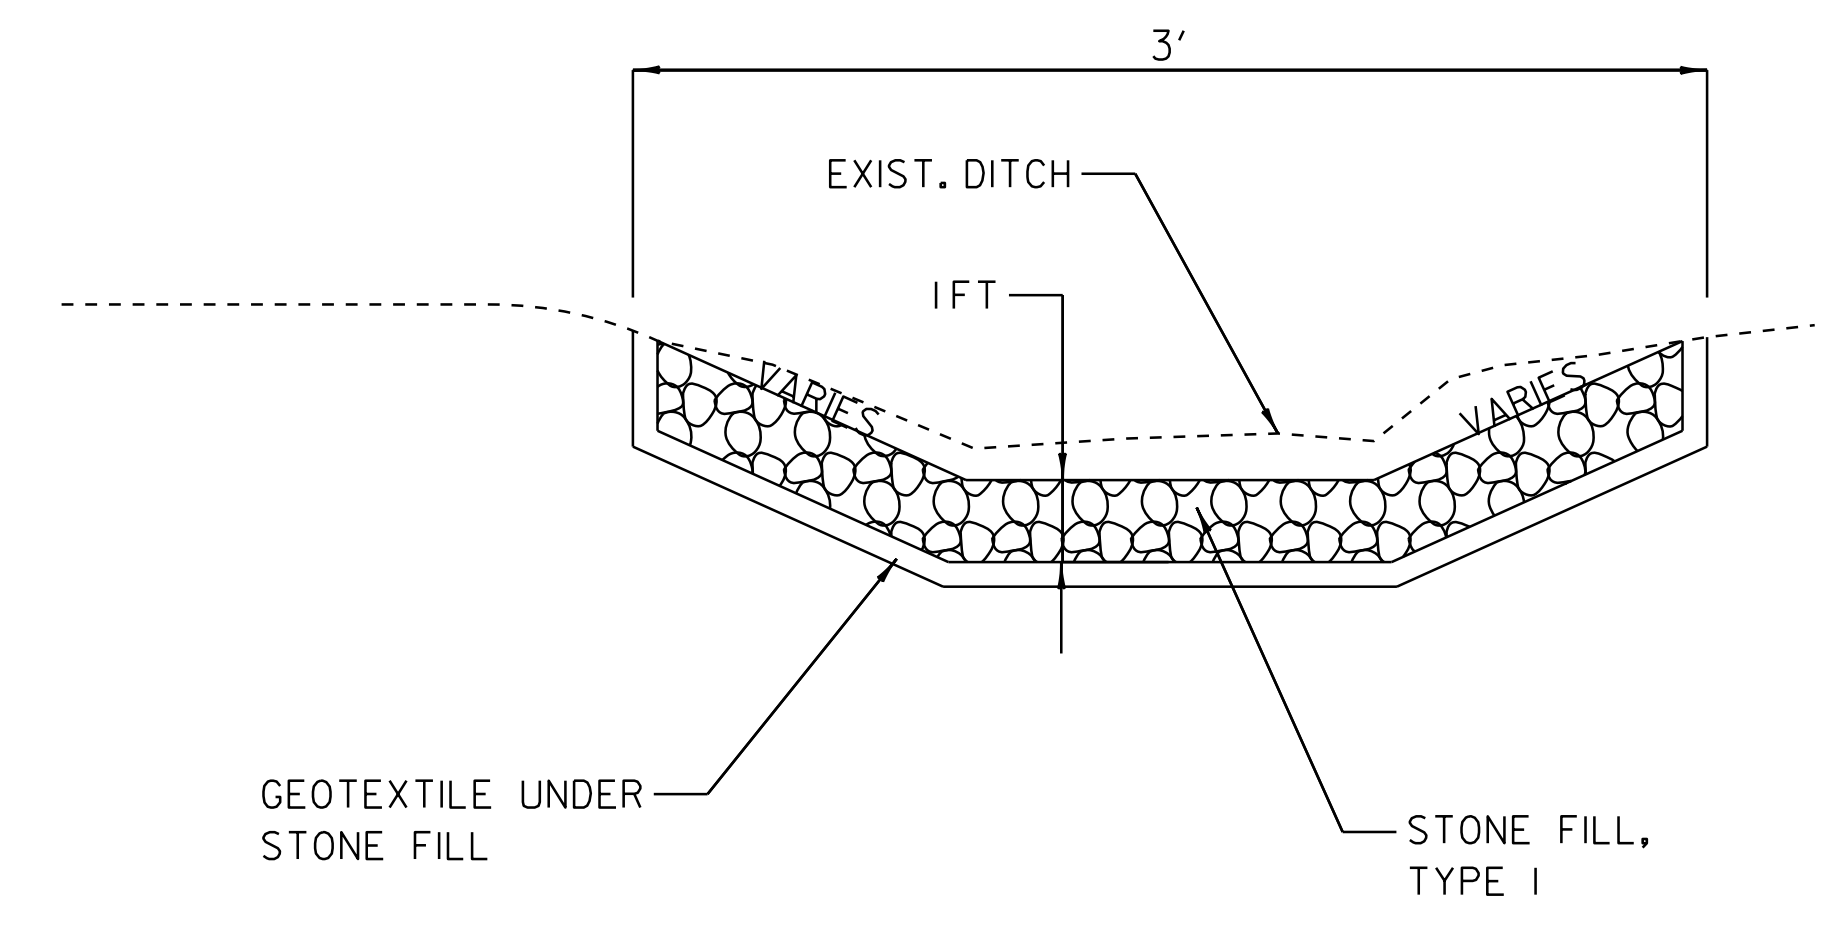

DITCH DETAIL

NOT TO SCALE

NOTES:

PIPE INLET AND OUTLET AREAS, AND DITCH CLEANING THROUGH PROJECT, SHALL BE PERFORMED AT LOCATIONS AND AS DIRECTED BY THE RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).

EROSION MATTING SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 1 AND 2.5 PERCENT AND STONE FILL TYPE I SHALL BE USED IN ALL DITCHES WITH A GRADE GREATER THAN 2.5 PERCENT OR AS DIRECTED BY THE RESIDENT ENGINEER.

DITCH CLEANING SHEET

PROJECT NAME:	HARTFORD - NORWICH	PLOT DATE:	14-FEB-2012 15:49
PROJECT NUMBER:	STP 2206(1)S	DRAWN BY:	MRS
FILE NAME:	/pave/99cl64/pcl64	CHECKED BY:	NLL
PROJECT LEADER:	PTS	SHEET	24 OF 137
DESIGNED BY:	NLL		
IPARM FILE NAME:	pcl64dc01.i		