


TEMPORARY AND DURABLE 4" WHITE LINE
 STA 50+79 TO 57+00 SOLID RT AND LT

TEMPORARY AND DURABLE 4" YELLOW LINE
 STA 50+79 TO 57+00 SOLID RT SOLID LT

DITCHING LOCATIONS (REFER TO SHEET 7 FOR DETAILS)
 STA 50+79 TO 52+00 RT
 STA 50+79 TO 57+00 LT
 STA 55+20 TO 56+35 RT

CURVE # 1
 △ 47° RT
 R=529'
 D=10° 50'
 T=230'
 L=434'
 BANKING 0.080 FT/FT
 190' RUNOFF (50 MPH)
 SEE SHEET 46 FOR BANKING DETAIL

TH - 2
 (GORE ROAD)
 MM 0.952 =
 STA. 50+29

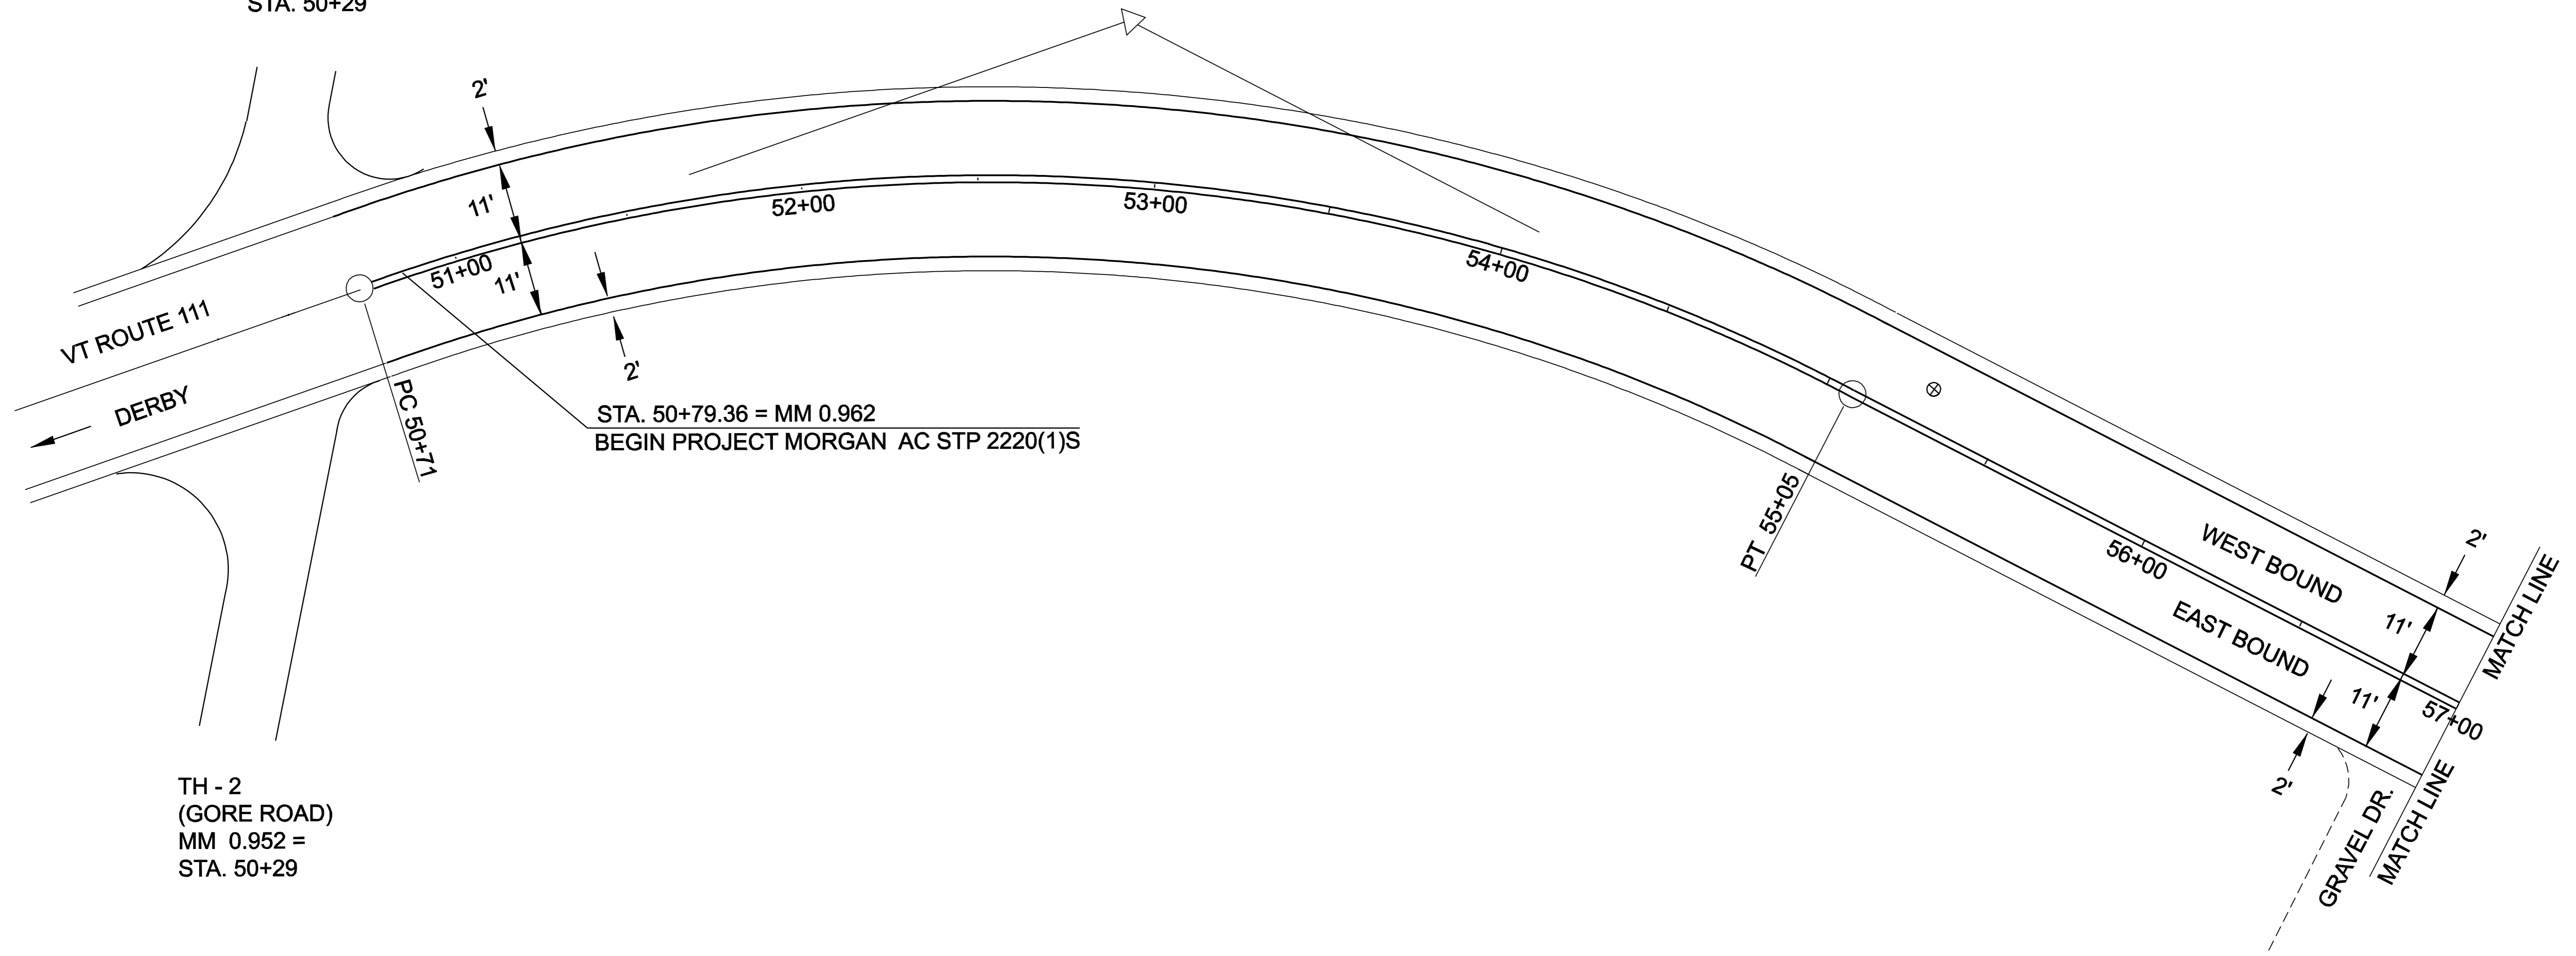

STA. 50+79.36 = MM 0.962
 BEGIN PROJECT MORGAN AC STP 2220(1)S

TH - 2
 (GORE ROAD)
 MM 0.952 =
 STA. 50+29

MORGAN VT. ROUTE 111 PAVEMENT CORE INFORMATION				
CORE #	STATION/POS.	DEPTH (in)	STRIPPED	DRAINABLE BASE
1	55+23 LT	11 3/4	NO	NO

PROJECT
LAYOUT
SHEET #1

DESIGNED BY LFW DATE 6/04
 DRAWN BY LFW DATE 6/04
 DESIGN FILE NO. pave/99cl92/99cl92.dgn
 PRF FILE 99cl92p01.l DATE PLOTTED 12-MAR-2007 11:3
 PROJ. NAME **MORGAN**
 PROJ. NO. **AC STP 2220(1)S**
 SHEET **8** OF **61** SHEETS