


STA 22+99.30 FAR LT
 BEGIN CHANNEL QUANTITIES:
 STONE FILL, TYPE III
 GRUBBING MATERIAL
 GEOTEXTILE UNDER STONE FILL
 CHANNEL EXCAVATION OF EARTH

STA 22+90.87 LT
 BEGIN CHANNEL QUANTITIES:
 STONE FILL, TYPE III
 GRUBBING MATERIAL
 GEOTEXTILE UNDER STONE FILL
 CHANNEL EXCAVATION OF EARTH

23+00

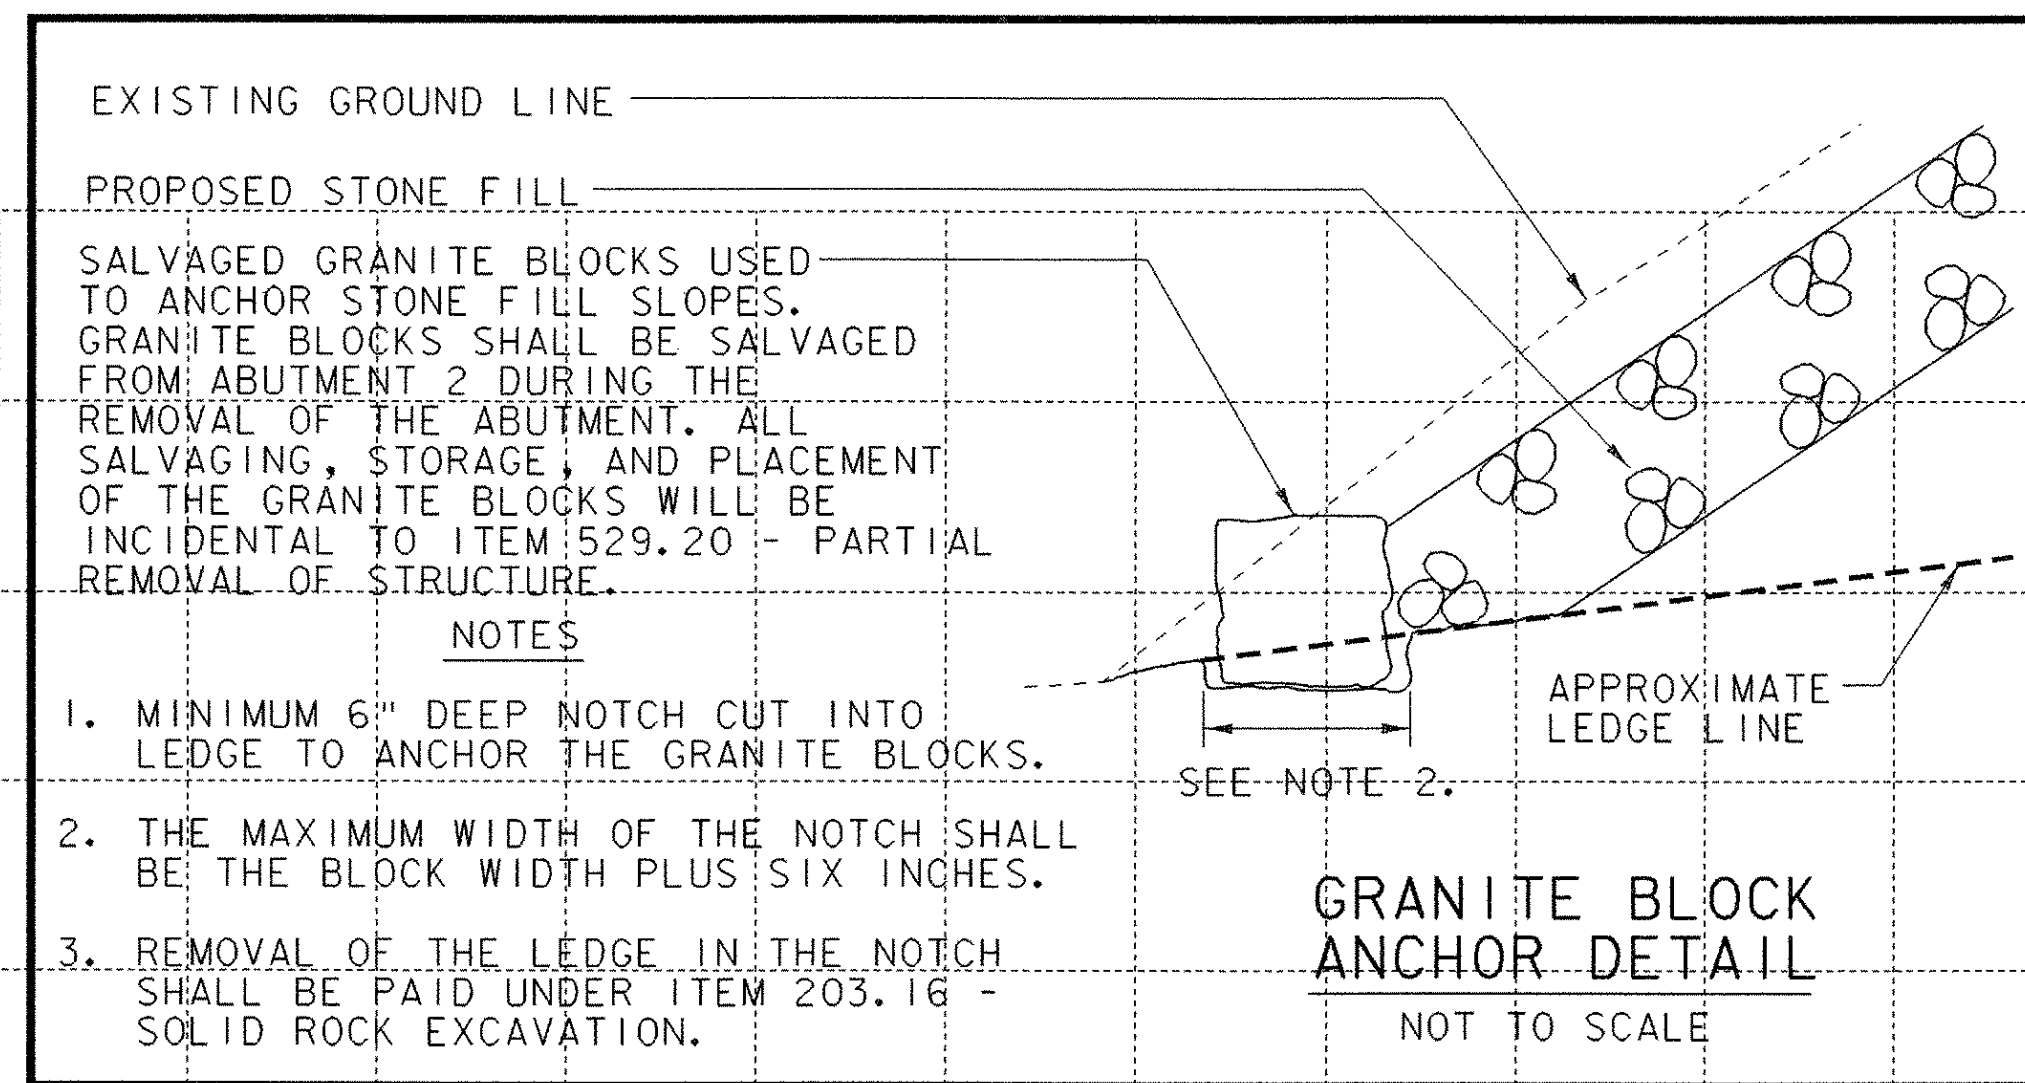


SALVAGED GRANITE BLOCKS USED TO ANCHOR STONE FILL SLOPES. GRANITE BLOCKS SHALL BE SALVAGED FROM ABUTMENT 2 DURING THE REMOVAL OF THE ABUTMENT. ALL SALVAGING, STORAGE, AND PLACEMENT OF THE GRANITE BLOCKS WILL BE INCIDENTAL TO ITEM 529.20 - PARTIAL REMOVAL OF STRUCTURE.

NOTES

1. MINIMUM 6" DEEP NOTCH CUT INTO LEDGE TO ANCHOR THE GRANITE BLOCKS.
2. THE MAXIMUM WIDTH OF THE NOTCH SHALL BE THE BLOCK WIDTH PLUS SIX INCHES.
3. REMOVAL OF THE LEDGE IN THE NOTCH SHALL BE PAID UNDER ITEM 203.16 - SOLID ROCK EXCAVATION.

GRANITE BLOCK ANCHOR DETAIL

NOT TO SCALE

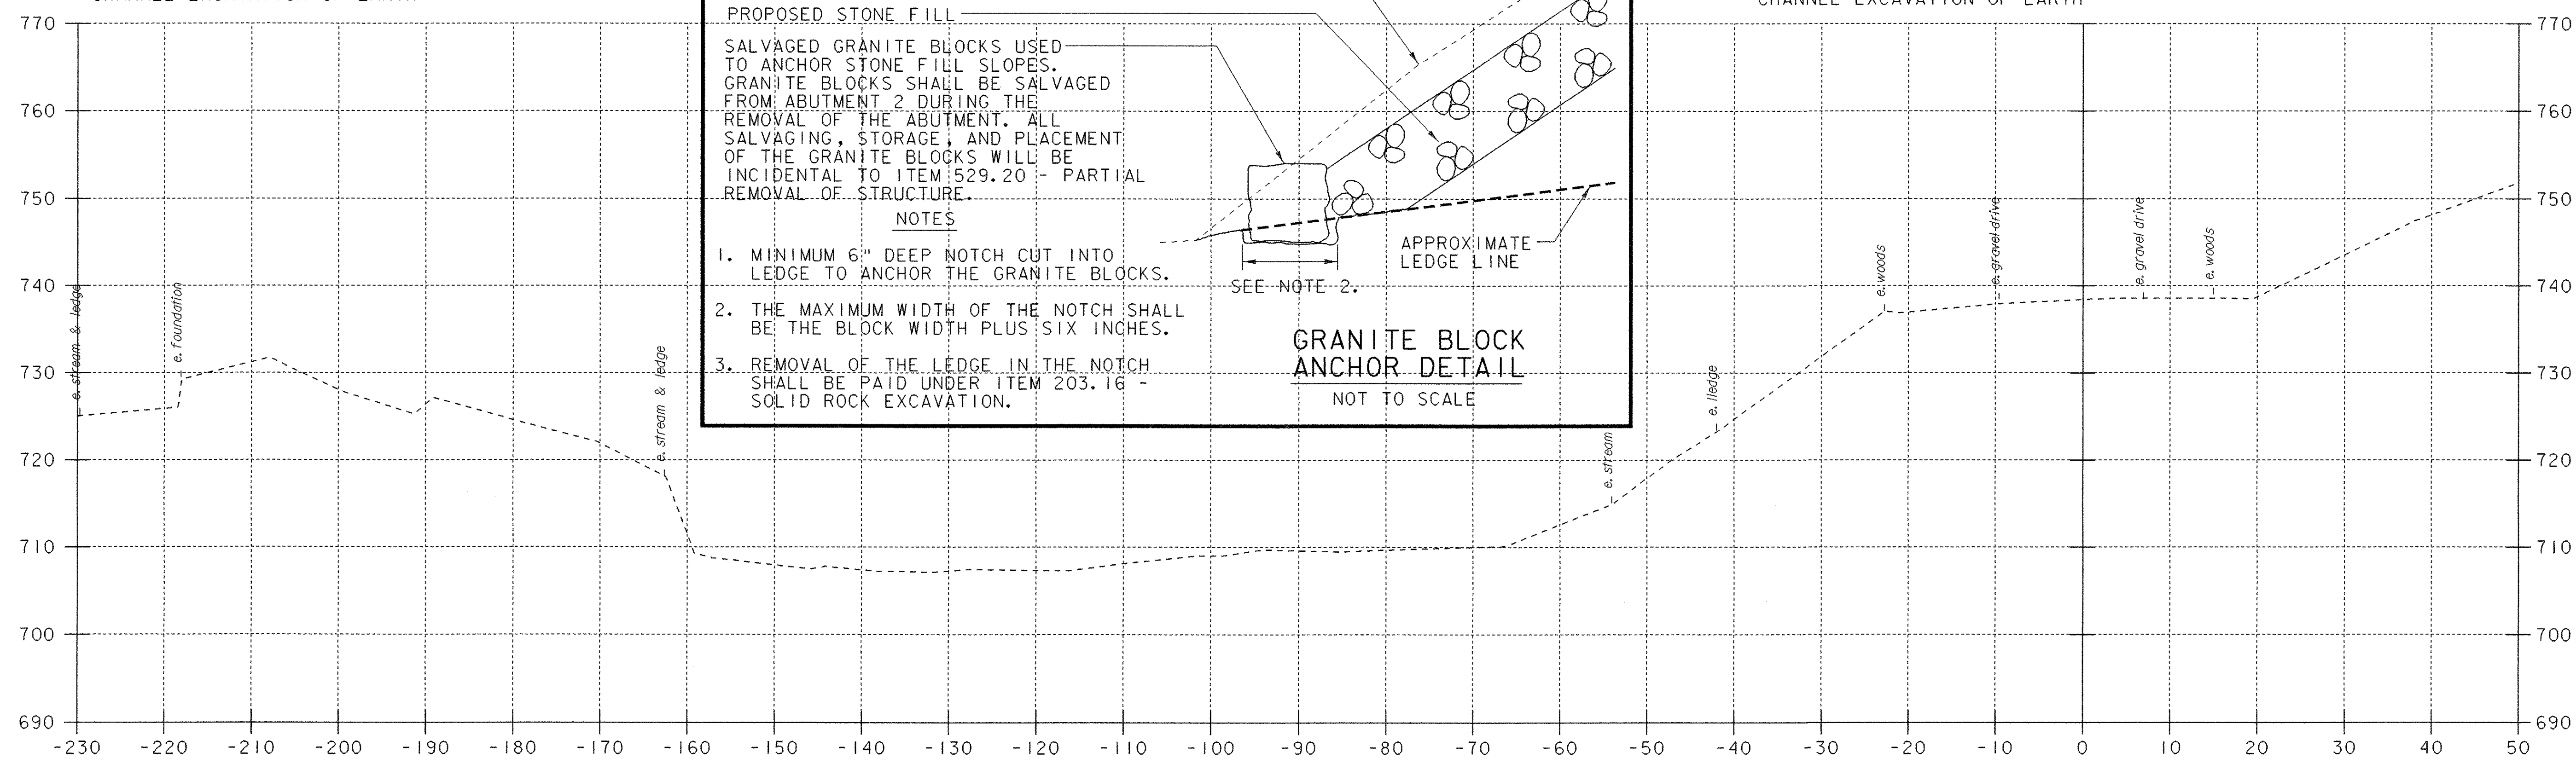

22+75

CHANNEL CROSS SECTIONS

PROJECT NAME:	BARTON
PROJECT NUMBER:	BRO 1449 (29)
FILE NAME: /str5/01j168/sj168xs.dgn	PLOT DATE: 02-APR-2007
PROJECT LEADER: W. SYMONDS	DRAWN BY: J. REED
DESIGNED BY: J. REED	CHECKED BY: J. LACROIX
sj168cx8.i	SHEET 82 OF 84

