Poor foundation material is to be removed from sta 154+75± - 160+20± and 163+50± - 166+60±. Removal of poor foundation material is to be paid for as Common Excavation Including Borrow, Item 10-11.

If found suitable for growing grasses, this poor foundation material is to be spread on all cut and fill slopes to a depth of three (3) inches, from sta 149+33.3 to sta 192+25±. Payment for the Topsoil, Item 106, shall be the number of cubic yards complete in place.

Topsoil, Item 106, shall be produced from within the Right of Way limits of this contract.
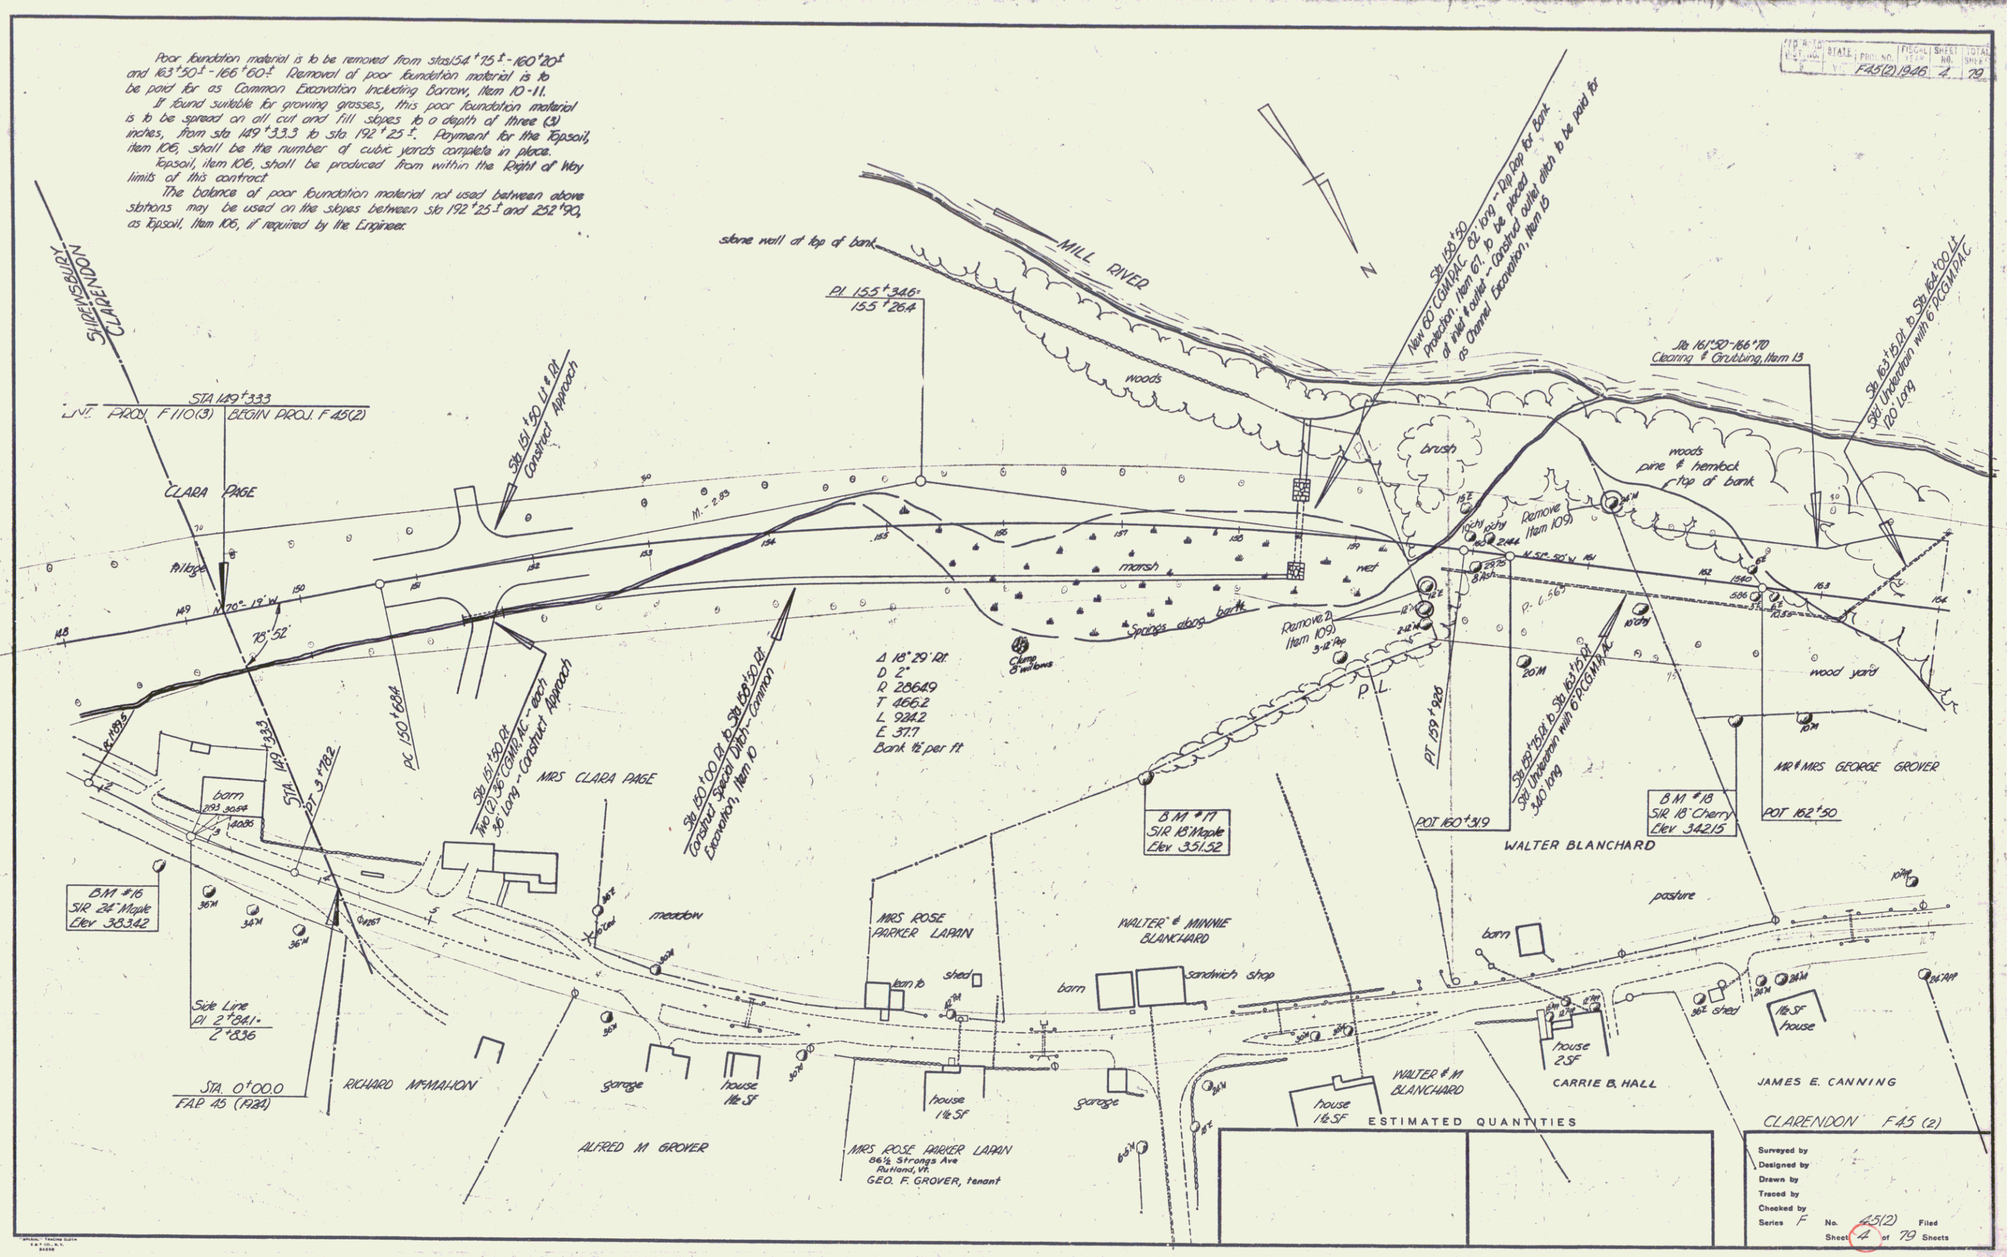
The balance of poor foundation material not used between above stations may be used on the slopes between sta 192+25± and 252+90, as Topsoil, Item 106, if required by the Engineer.