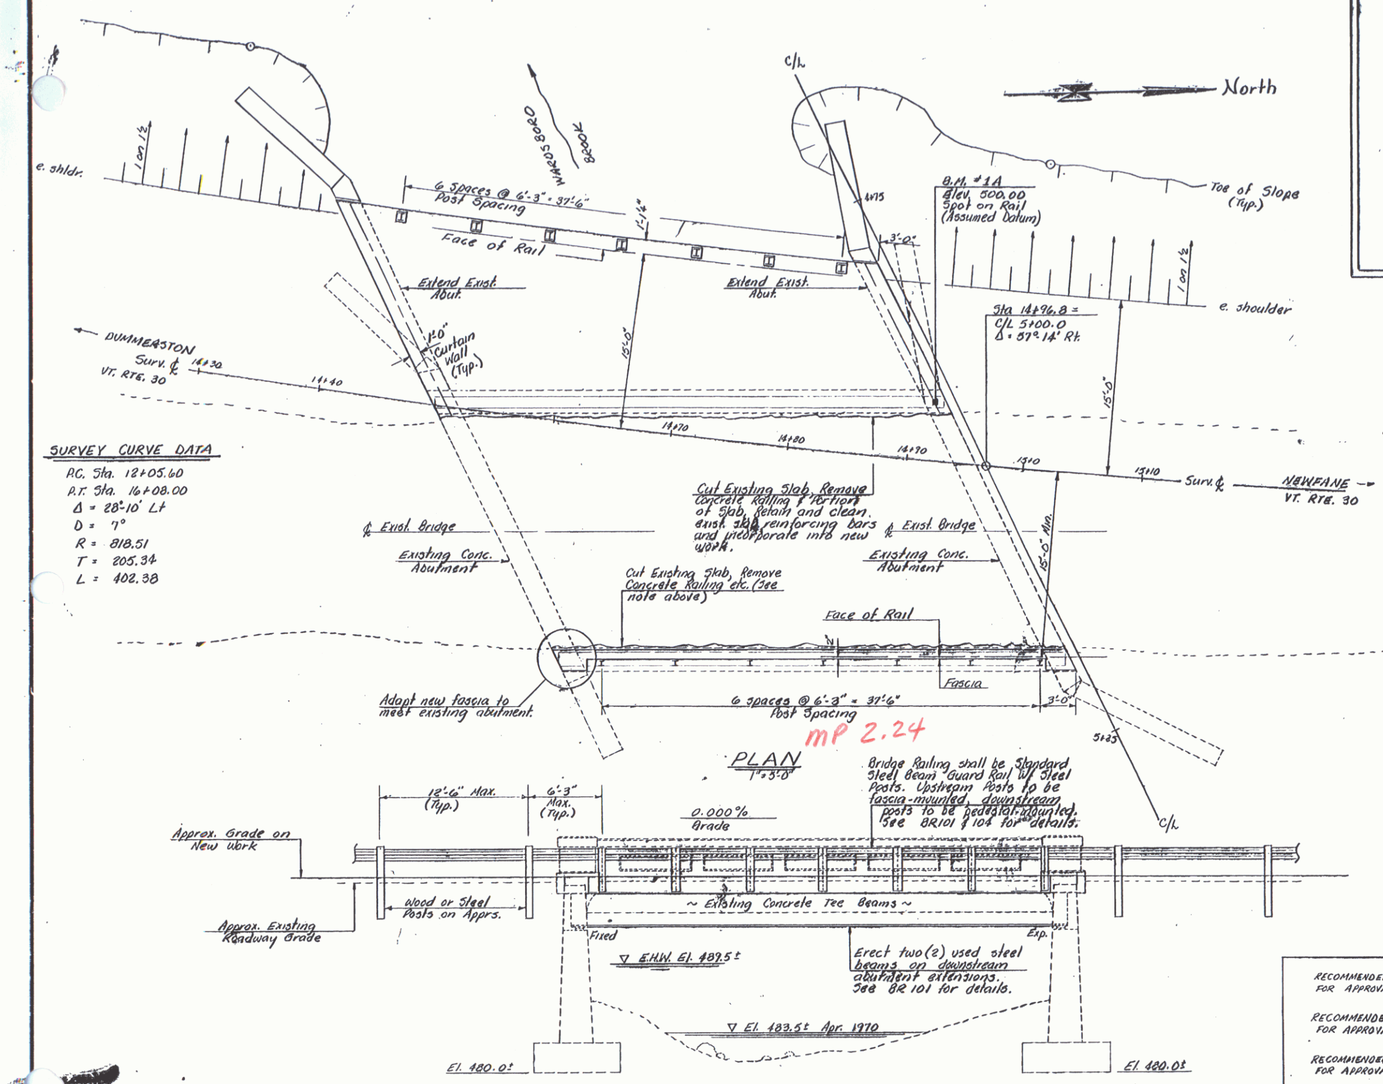

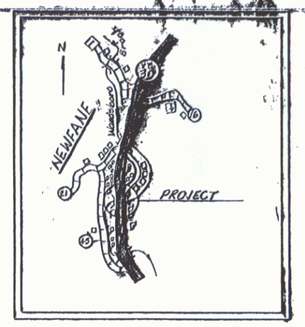

SCOPE

This project shall consist of removing the existing concrete railing on both sides of the bridge and widening the deck on the downstream side by the addition of two (2) used steel beams. Both abutments shall be extended on the downstream ends to accommodate the widened deck.

INDEX OF SHEETS

1. Plan, Elevation, General Notes
2. Typical Section, Framing Plan, and Notes
3. Abutment #1 Details
4. Abutment #2 Details
5. Curb and Railing Details

STANDARD SHEETS

SCB-DB-67 (A) Jan. 24, 1968A
SCB-D7-67 (A) Dec. 11, 1970R

GENERAL NOTES

1. Elevations shown are based on an assumed datum. (Survey BM #1A) Dimensions and elevations of the existing structure have been taken from the original plans for the structure (1967) and from recent survey information.

BMA 6919

Pin # 00R350

VT Route 30

RECOMMENDED FOR APPROVAL	R.R. Pierchert for DISTRICT ENGINEER	3-3-71 DATE
RECOMMENDED FOR APPROVAL	L.W. Brown BRIDGE ENGINEER	3/3/71 DATE
RECOMMENDED FOR APPROVAL	R.O. Nyman Jr. ASST. CHIEF ENGINEER	3/3/71 DATE
APPROVED	R.H. Crandall CHIEF ENGINEER	3/3/71 DATE

STATE OF VERMONT
DEPARTMENT OF HIGHWAYS

TOWN OF NEWFANE	Bridge No. 12
	Log Sta. 118+33±
HIGHWAY NO. Vt. Rte. 30	Surv. Sta. 14+90±
Vt. Rte. 30 Relocated over Wardsboro Br.	
PLAN, ELEVATION, GENERAL NOTES	
Designed by J.A. Richardson	Drawn by J.A. Richardson
Checked by R.H. Burrington date 2/26/71	Bridge Design Supervisor J.R. Jennings date Feb '70
PROJECT NEWFANE	PROJECT NO. BMA 6919
Bridge Sheet No. BR100	Sheet 1 of 5