



**MATERIAL TOLERANCES**

(IF USED ON PROJECT)

SURFACE	
- PAVEMENT (TOTAL THICKNESS)	+/- 1/4"
- AGGREGATE SURFACE COURSE	+/- 1/2"
SUBBASE	
	+/- 1"
SAND BORROW	
	+/- 1"

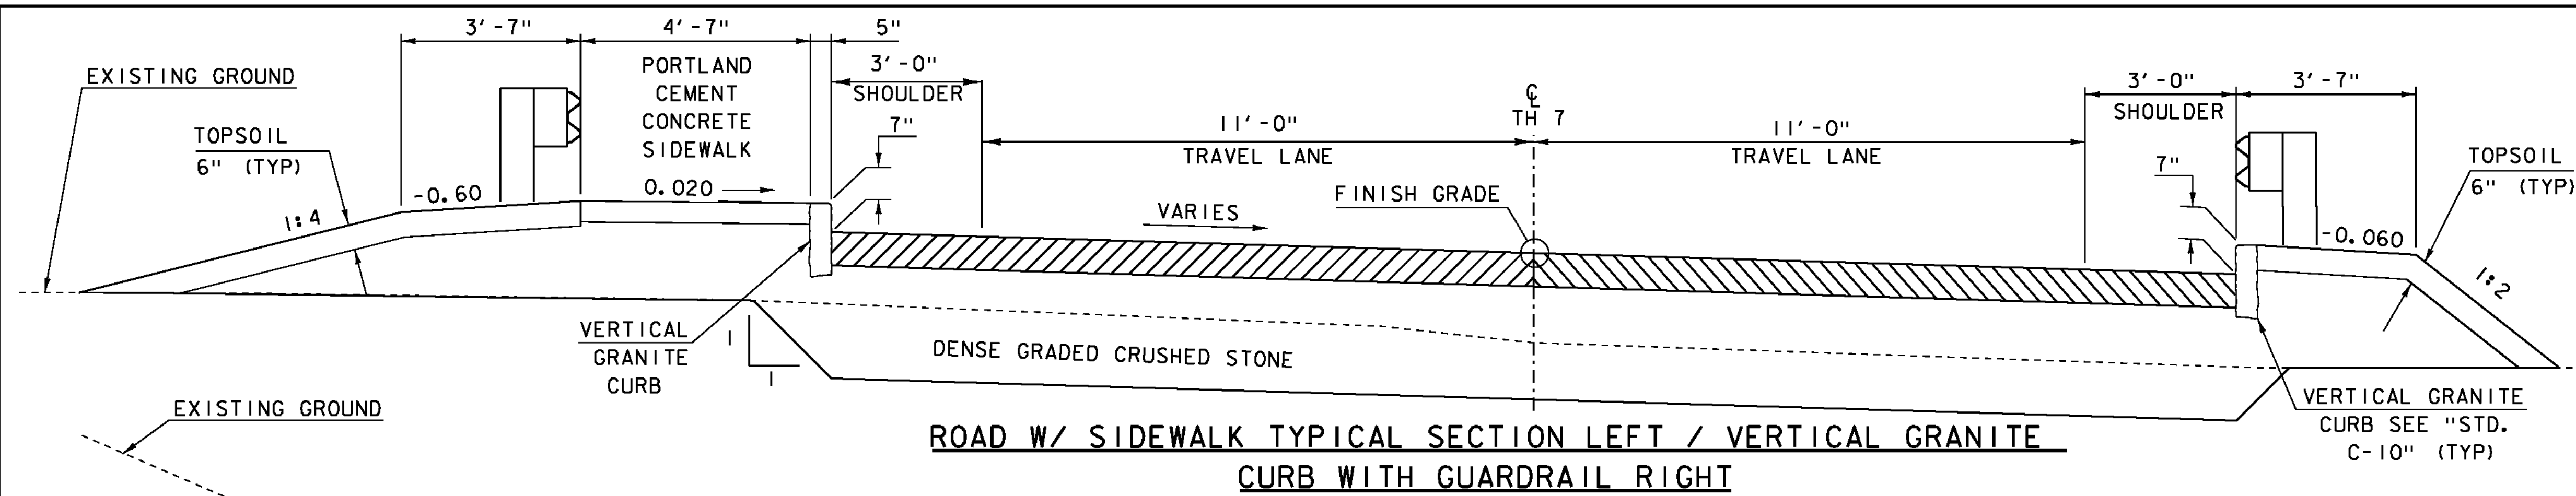


**ROAD W/ SIDEWALK TYPICAL SECTION LEFT / VERTICAL GRANITE CURB WITH GUARDRAIL RIGHT**  
SCALE 1/2" = 1'-0"

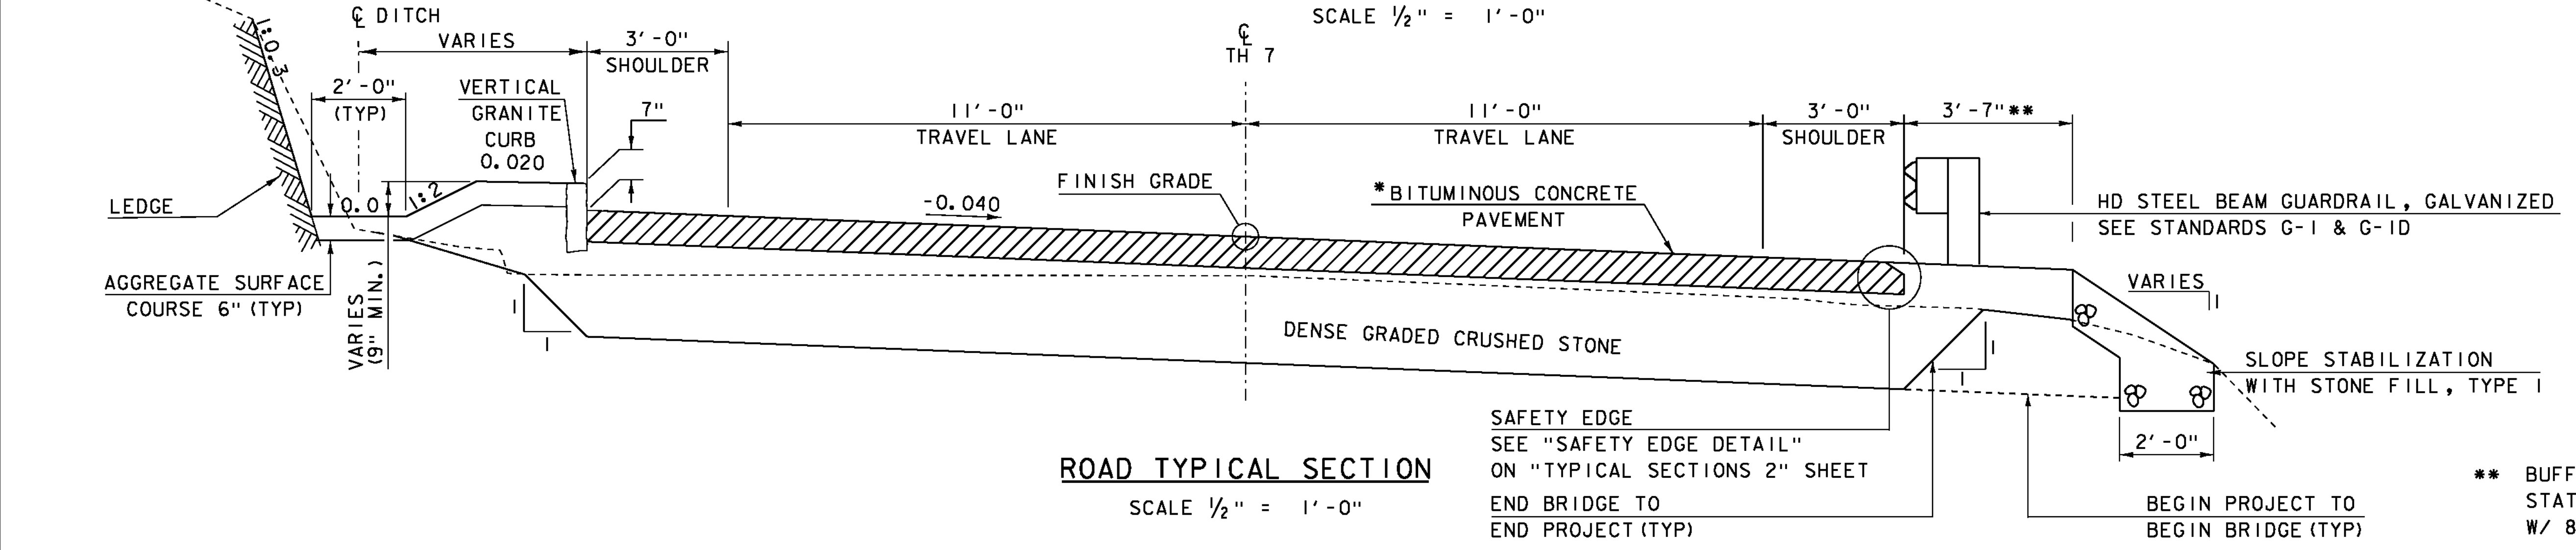

**ROAD TYPICAL SECTION**  
SCALE 1/2" = 1'-0"

\*\* BUFFER SHALL BE 2'-7" BETWEEN STATIONS 12+45.50 AND 12+98.50 W/ 8' STEEL POSTS

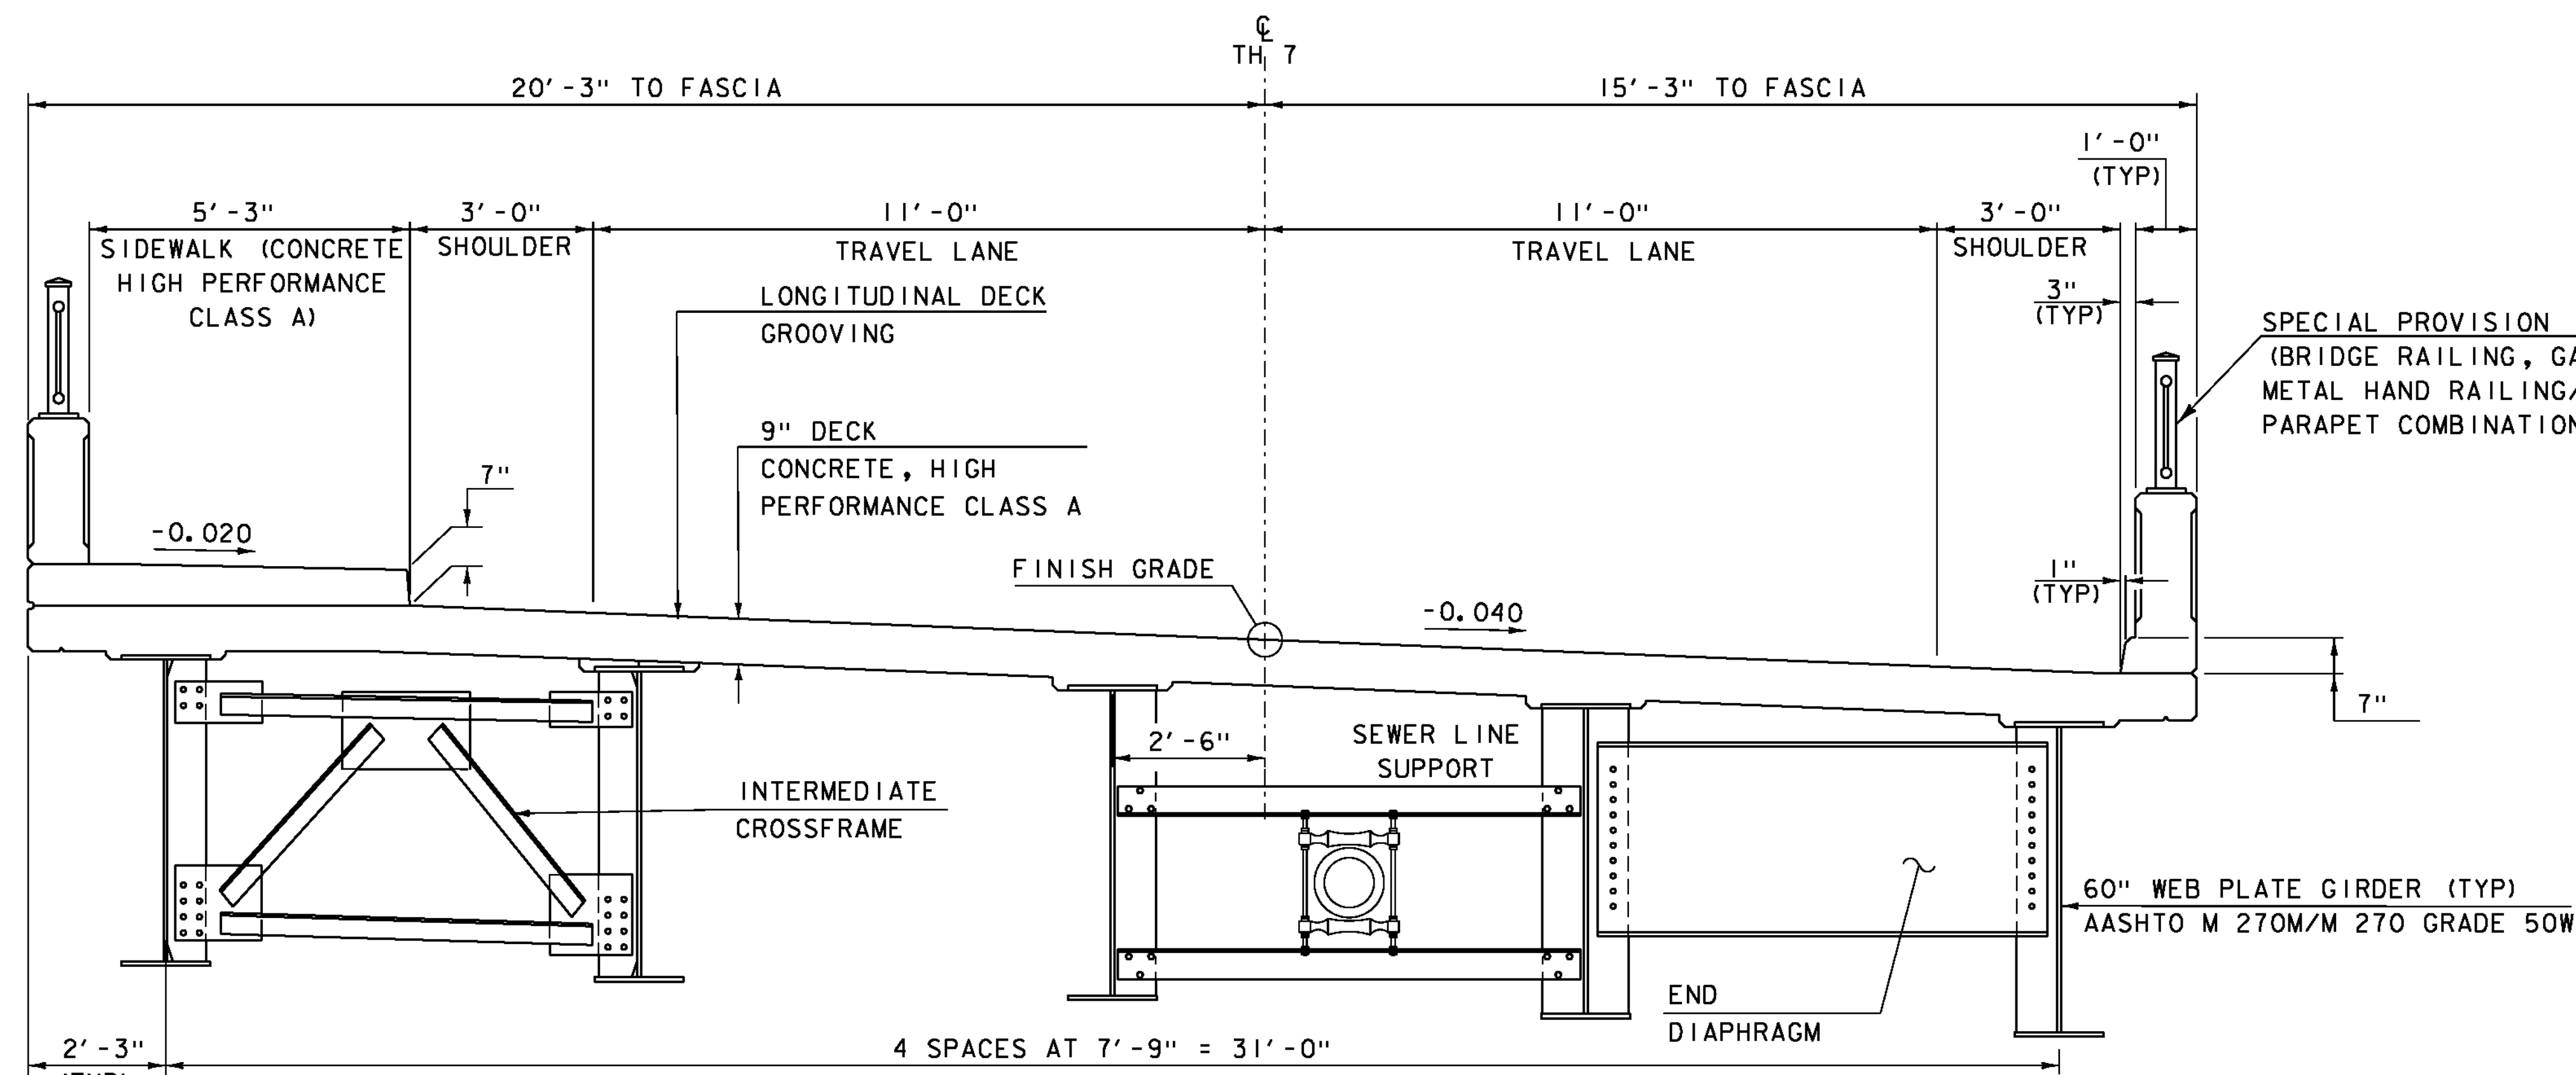

**BRIDGE TYPICAL SECTION**  
SCALE 1/2" = 1'-0"

- \* 1 1/2" BITUMINOUS CONCRETE PAVEMENT (TYPE III S)
- 1 1/2" BITUMINOUS CONCRETE PAVEMENT (TYPE III S)
- 2 1/2" BITUMINOUS CONCRETE PAVEMENT (TYPE II S)
- 2 1/2" BITUMINOUS CONCRETE PAVEMENT (TYPE II S)
- 2'-0" SUBBASE OF DENSE GRADED CRUSHED STONE

PROJECT NAME:	BARRE TOWN	PLOT DATE:	27-SEP-2012
PROJECT NUMBER:	BRF 6100(7)	DRAWN BY:	J. SALVATORI
FILE NAME:	s06j002typ.dgn	CHECKED BY:	T. FILLBACH
PROJECT LEADER:	J. LACROIX	TYPICAL SECTIONS:	1
DESIGNED BY:	T. FILLBACH	SHEET:	3 OF 70