


APPROACH SLAB PLAN

SCALE: 1/4" = 1'-0"

NOTES:

1. COMPACT THE SUBBASE IN THE AREA UNDER THE APPROACH SLAB TO A SMOOTH SURFACE.
2. MATERIAL FOR POLYETHYLENE SHEETING SHALL MEET THE REQUIREMENTS OF SUBSECTION 725.01 (c). THE SHEETING THICKNESS SHALL BE 12 MIL. PLACE THE SHEETING ON TOP OF THE FINISHED SUBBASE FOR THE FULL LENGTH AND WIDTH OF THE APPROACH SLAB, EXCEPT IN THE BRACKET AREA AT THE ABUTMENT. LAP SHEETING AT LEAST 2'-0". PAYMENT FOR SHEETING SHALL BE INCLUDED IN THE UNIT PRICE BID FOR ITEM 501.34 "CONCRETE, HIGH PERFORMANCE CLASS B".
3. PLACE HOOKED ENDS OF BOTTOM STEEL AT ABUTMENT END OF SLAB UNLESS OTHERWISE SHOWN.
4. BOND BREAKER TAR EMULSION SHALL BE INCIDENTAL TO PAYMENT INCIDENTAL TO HIGH PERFORMANCE CONCRETE, CLASS B

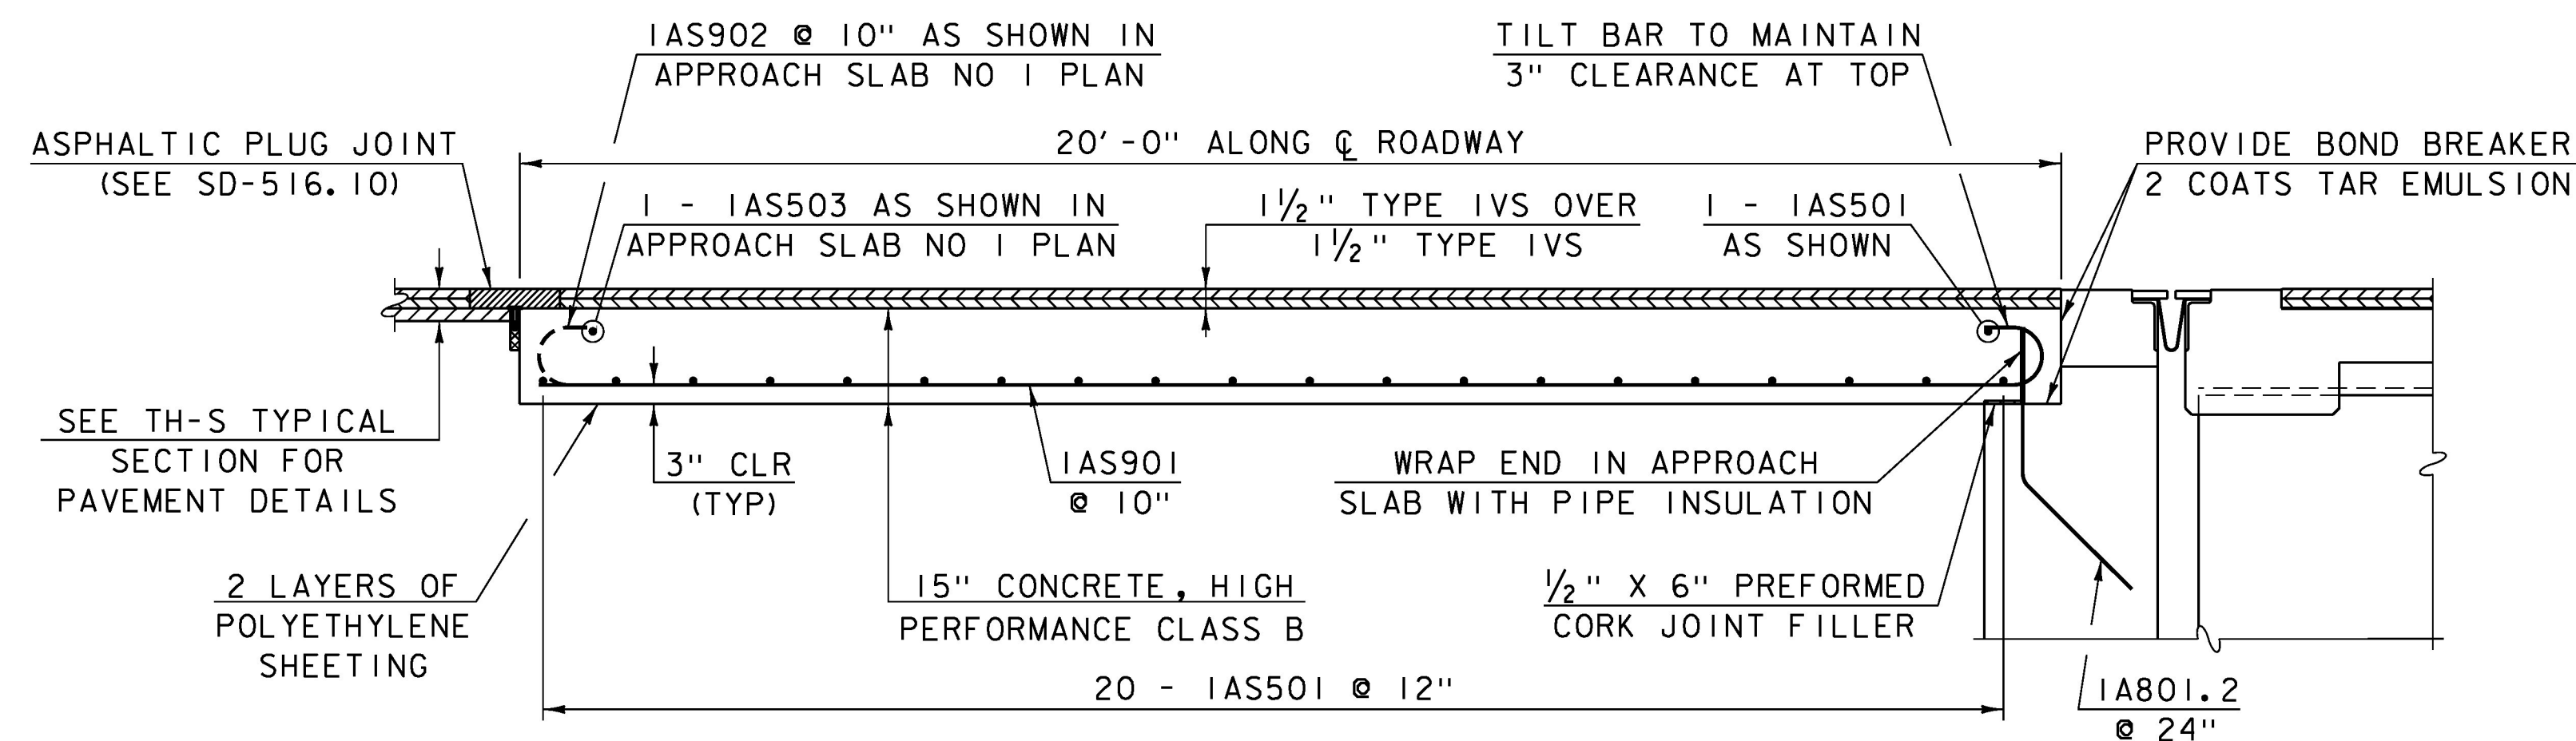

APPROACH SLAB NO 1 DETAIL

SCALE: 1/2" = 1'-0"
(APPROACH SLAB NO 2 SIMILAR)

PROJECT NAME:	RUTLAND CITY
PROJECT NUMBER:	BRF 3000 (16)
FILE NAME:	s94j092sup.dgn
PROJECT LEADER:	C. CARLSON
DESIGNED BY:	M. EVANS-MONGEON
APPROACH SLAB DETAILS	
PLOT DATE:	03-JUL-2014
DRAWN BY:	G. ROY
CHECKED BY:	M. EVANS-MONGEON
SHEET	176 OF 245