


NOTES:

1. THE EROSION CONTROL MEASURES SHOWN ON THIS SHEET ARE FOR ILLUSTRATIVE PURPOSES ONLY. THE ACTUAL EROSION CONTROL PLAN SHALL BE BASED ON EXISTING FIELD CONDITIONS AND SUBMITTED BY THE CONTRACTOR FOR APPROVAL TO THE RESIDENT ENGINEER. PAYMENT FOR THE DEVELOPMENT OF THE EROSION CONTROL PLAN SHALL BE INCLUDED IN ITEM 652.10 - EROSION PREVENTION AND SEDIMENT CONTROL PLAN.
2. MONITORING AND MAINTAINING THE EROSION AND SEDIMENT CONTROL PLAN SHALL BE PER ITEM 652.20 - MONITORING EROSION PREVENTION AND SEDIMENT CONTROL PLAN AND ITEM 652.30 - MAINTENANCE OF EROSION PREVENTION AND SEDIMENT CONTROL PLAN.
3. PROJECT DEMARCATION FENCING SHALL BE PLACED AS SHOWN ON THIS PLAN. ANY CHANGES TO THE PROPOSED LAYOUT SHALL BE SUBMITTED FOR APPROVAL BY THE RESIDENT ENGINEER.
4. FOR CLARITY, AREAS TO BE SEEDED AND MULCHED HAVE NOT BEEN INDICATED. ALL DISTURBED AREAS SHALL BE SEEDED AND MULCHED AS APPLICABLE.
5. THE LOCATION OF ANY WASTE OR BORROW AREAS AND HAUL ROADS SHALL BE SUBMITTED BY THE CONTRACTOR FOR APPROVAL TO THE RESIDENT ENGINEER. THE LOCATION OF ANY CONSTRUCTION ENTRANCES SHALL ALSO BE SHOWN ON THE SUBMITTAL.

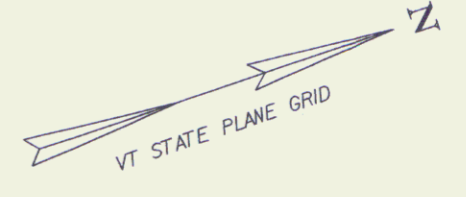

- LEGEND**
- PDF — PROJECT DEMARCATION FENCE
 - SILT FENCE
 - ROCK CHECK DAM
 - DRAINAGE PATTERNS


DATUM
 VERTICAL: NAVD 88
 HORIZONTAL: NAD83

SILT FENCE
 STA 20+39.2, TO STA 21+50.0, RT

PROJECT DEMARCATION FENCE
 STA 3+75.0 TO STA 21+50.0, RT
 STA 5+23.7 TO STA 5+83.5, RT
 STA 20+63.8 TO STA 21+03.1, LT

ROCK CHECK DAMS
 STA 4+04.4, RT
 STA 22+50.0, LT

- NOTES:**
1. PROPOSED CONTOURS NOT SHOWN. SEE CROSS SECTIONS FOR PROPOSED GRADING.



EROSION CONTROL	PROJECT NAME: FRANKLIN	PLOT DATE: 23-JUN-2006
	PROJECT NUMBER: HES 0313(4)	DRAWN BY: MJF
	FILE NAME:	CHECKED BY: DMB
	PROJECT LEADER: GAMBLE DESIGNED BY: BRC	ROW SHEET 5 OF 7 SHEETS

MAR 25 2010