


STEEL BEAM GUARDRAIL, GALVANIZED W/8 FEET POSTS
 STA 55+50.00 - 56+76.31, LT
 STA 55+50.00 - 56+88.02, RT

ANCHOR FOR STEEL BEAM RAIL
 STA 56+65.00, LT
 STA 56+75.00, RT

TEMPORARY 4 INCH WHITE LINE
 STA 55+50.00 - STA. 57+90.00, RT SWEL
 STA 55+50.00 - STA. 58+00.00, LT SWEL

TEMPORARY 4 INCH YELLOW LINE
 STA 55+50.00 - STA. 58+00.00, CL DYL
 NOTE: DYL NOT SHOWN FOR CLARITY

TEMPORARY ROADWAY LAYOUT 2

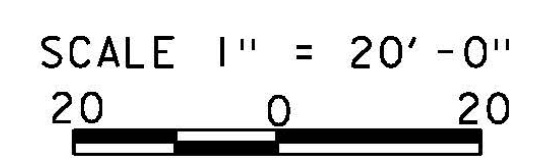

 LIMITS OF STRUCTURE

NOTE: ITEM DESCRIPTIONS AND STATION RANGES PROVIDED ARE TO AID IN THE LAYOUT AND CONSTRUCTION OF THE TEMPORARY ROADWAY. ALL ITEMS ARE INCIDENTAL TO ITEM 528.11, "TWO-WAY TEMPORARY BRIDGE."

PROJECT NAME: DUXBURY	
PROJECT NUMBER: BF 013-4(47)	
FILE NAME: r16b001temp2.dgn	PLOT DATE: 05-MAY-2016
PROJECT LEADER: K. HIGGINS	DRAWN BY: TYLIN
DESIGNED BY: TYLIN	CHECKED BY: TYLIN
TEMPORARY ROADWAY SHEET 2	SHEET 13 OF 19